

# ADAM-4060


# ADAM-4068

# ADAM-4069


## 4-ch Relay Output Module

## 8-ch Relay Output Module with Modbus®

## 8-ch Power Relay Output Module with Modbus

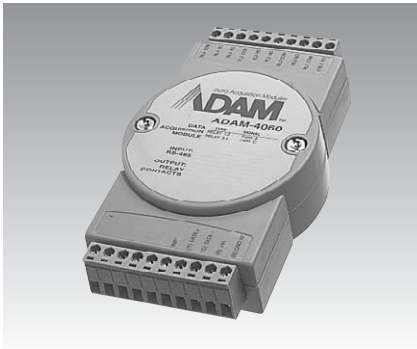

ADAM-4060

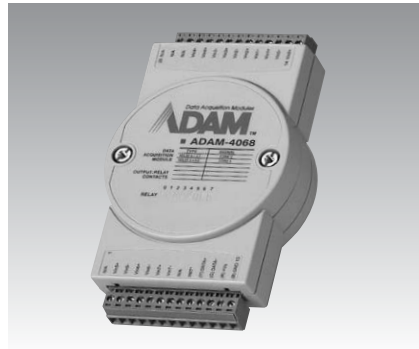

ADAM-4068



ADAM-4069



### Specifications

#### General

- **Connectors** 2 x plug-in terminal blocks (#14 ~ 22 AWG)
- **Power Consumption** 0.8 W @ 24 V<sub>DC</sub>
- **Watchdog Timer** System (1.6 second)
- **Support Protocol** ASCII command

#### Relay Output

- **Breakdown Voltage** 500 V<sub>AC</sub> (50/60 Hz)
- **Channels** 2 x form A  
2 x form C
- **Contact Rating (Resistive)** AC: 0.6 A @ 125 V  
0.3 A @ 250 V  
DC: 2 A @ 30 V  
0.6 A @ 110 V
- **Initial Insulation Resistance** 1 G Ω min. at 500 V<sub>DC</sub>
- **Relay off Time (typical)** 2 ms
- **Relay on Time (typical)** 3 ms

### Specifications

#### General

- **Connectors** 2 x plug-in terminal blocks (#14 ~ 28 AWG)
- **Power Consumption** 0.6 W @ 24 V<sub>DC</sub>
- **Watchdog Timer** System (1.6 second) & Communication
- **Support Protocol** ASCII command and Modbus/RTU

#### Relay Output

- **Breakdown Voltage** 500 V<sub>AC</sub> (50/60 Hz)
- **Channels** 4 x form A  
4 x form C
- **Contact Rating (Resistive)** AC: 0.5 A @ 120 V  
0.25 A @ 240 V  
DC: 1 A @ 30 V  
0.3 A @ 110 V
- **Initial Insulation Resistance** 1 G Ω min. at 500 V<sub>DC</sub>
- **Relay off Time (typical)** 4 ms
- **Relay on Time (typical)** 3 ms

### Specifications

#### General

- **Connectors** 2 x plug-in terminal blocks (#14 ~ 28 AWG)
- **Power Consumption** 2.2 W @ 24 V<sub>DC</sub>
- **Watchdog Timer** System (1.6 second) & Communication
- **Support Protocol** ASCII command and Modbus/RTU

#### Relay Output

- **Breakdown Voltage** 1000 V<sub>AC</sub> (50/60 Hz)
- **Channels** 4 x form A  
4 x form C
- **Contact Rating (Resistive)** AC: 5 A @ 250 V  
DC: 5 A @ 30 V
- **Initial Insulation Resistance** 1 G Ω min. at 500 V<sub>DC</sub>
- **Relay off Time (typical)** 5.6 ms
- **Relay on Time (typical)** 5 ms

### Common Specifications

- **Power Input** Unregulated 10 ~ 30 V<sub>DC</sub>
- **Environment**
- **Humidity** 5 ~ 95% RH
- **Operating Temperature** -10 ~ 70° C  
(14 ~ 158° F)
- **Storage Temperature** -25 ~ 85° C  
(-13 ~ 185° F)

### Ordering Information

- **ADAM-4060** 4-ch Relay Output Module
- **ADAM-4068** 8-ch Relay Output Module with Modbus
- **ADAM-4069** 8-ch Power Relay Output Module with Modbus