

# ADAM-5051S

# ADAM-5052

# ADAM-5055S

16-ch Isolated Digital Input Module w/LED

8-ch Isolated Digital Input Module w/LED

16-ch Isolated Digital I/O Module w/LED



ADAM-5051S



## Specifications

### General

- **Certifications** CE
- **Connectors** 1 x Plug-in screw terminal (# 14-28 AWG)
- **LED Indicators** On: Active  
Off: Inactive
- **Power Consumption** 0.8 W (max.)

### Digital Input


- **Channels** 16
- **Input Voltage** 50 V<sub>max</sub>
- **Logic Level** Logic level 0: 3 V max.  
Logic level 1: 10 ~ 50 V

### Protection

- **Optical Isolation** 2500 V<sub>DC</sub>
- **Overvoltage Protection** 70 V<sub>DC</sub>

## Ordering Information

- **ADAM-5051S** 16-ch Isolated Digital Input Module w/LED

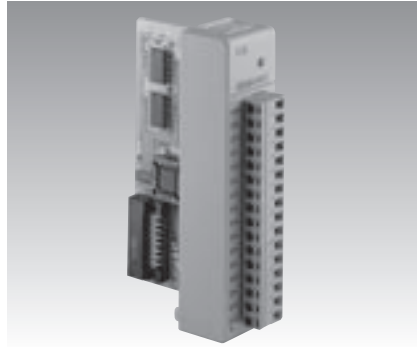

ADAM-5052



## Specifications

### General

- **Certifications** CE, FM
- **Connectors** 1 x Plug-in screw terminal (# 14-22 AWG)
- **Power Consumption** 0.27 W (max.)

### Digital Input

- **Channels** 8
- **Input Resistance** 3 kΩ/0.5 W
- **Logic Level** Logic level 0: 1 V<sub>max</sub>  
Logic level 1: 3.5 ~ 30 V

### Protection

- **Isolation Voltage** 5000 V<sub>RMS</sub>

## Ordering Information

- **ADAM-5052** 8-ch Isolated Digital Input Module w/LED



ADAM-5055S



## Specifications

### General

- **Certifications** CE
- **Connectors** 1 x Plug-in screw terminal (# 14-28 AWG)
- **LED Indicators** On: Active  
Off: Inactive
- **Power Consumption** 0.68 W (max.)

### Digital I/O

- **Channels** 16
- **Channel I/O Type** 8 DO, 8 DI
- **Logic Level (DI)** Dry contact:  
Logic level 0: open  
Logic level 1: close to GND  
Wet contact:  
Logic level 0: 3 V max.  
Logic level 1: 10 ~ 50 V
- **Digital Output** Open collector to 40 V  
200 mA max. load
- **Power Dissipation** Channel : 1 W max.  
Total : 2.2 W  
(8 channels)

### Protection

- **Isolation Voltage** 2500 V<sub>DC</sub>
- **Overvoltage Protection** 70 V<sub>DC</sub> (DI only)

## Ordering Information

- **ADAM-5055S** 16-ch Isolated Digital I/O Module w/LED