


SFP BIDI, Single LC Connector, 1310nm DFB LD for Single Mode Fiber, RoHS Compliant



## **Applications**

- Gigabit Ethernet Links
- Fiber Channel Links at 1.06 Gbps
- High Speed Backplane Interconnects
- Switched Backbones

#### Features



- 1310nm DFB LD
- Multi Data Rate: from 125M to 1.25Gbps, NRZ
- Single +3.3V Power Supply
- RoHS Compliant and Lead-free
- AC/AC Differential Electrical Interface
- Compliant with Multi-Source Agreement (MSA) Small Form Factor Pluggable (SFP)
- Single LC Connector
- Compliance with specifications for IEEE-802.3z Gigabit Ethernet at 1.25 Gbps
- Compliance with ANSI specifications for Fiber Channel applications at 1.06 Gbps
- Eye Safety
   Designed to meet Laser Class 1, complies with EN60825-1

## Description

The SFP-WA40 from AAXEON is the high performance and cost-effective module for serial optical data communication applications specified for single mode of multi-rate from 125M to 1.25 Gb/s. It operates on +3.3V power. The module is intended for single mode fiber, operates at a nominal wavelength of Tx: 1310nm / Rx: 1550nm, and complies with Multi-Source Agreement (MSA) Small Form Factor Pluggable (SFP). Each module consists of a bi-directional optical subassembly that combines a transmitter with a receiver and an electrical subassembly. All are housed in a metal package and the combination produces a reliable component.

The module is a single fiber connector transceiver designed for use in Gigabit Ethernet applications and to provide IEEE-802.3z compliant link for 1.25Gb/s long reach applications. The characteristics are performed in accordance with Telcordia Specification GR-468-CORE.

#### **EMC**

Most equipment utilizing high-speed transceivers will be required to meet the following requirements:

- 1) FCC in the United States
- 2) CENELEC EN55022 (CISPR 22) in Europe

To assist the customer in managing the overall equipment EMC performance, the transceivers have been designed to satisfy FCC class B limits and provide good immunity to radio-frequency electromagnetic fields.

## Eye Safety

The transceivers have been designed to meet Class 1 eye safety and comply with EN 60825-1.





## **Product Information**

Model Number	Operating Voltage & SD Output	Distance	Wavelength	Output Power	Sensitivity
SFP-WA40	3.3V TTL AC/AC	40 km	1310 nm DFB / 1550 nm	-3 ~ +2 dBm	≤-23 dBm

#### **ABSOLUTE MAX RATINGS**

PARAMETER	SYMBOL	MIN	MAX	UNIT	NOTE
Storage Temperature	T <sub>S</sub>	-40	85	°C	
Supply Voltage	V <sub>CC</sub>	0	6	V	
Data Input Voltage		0	Vcc	V	
Supply Current	l <sub>s</sub>		300	mA	

#### **OPERATING CONDITIONS**

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	NOTE
Case Operating Temperature	T <sub>A</sub>	0		70	°C	
Supply Voltage	V <sub>CC</sub>	3.1		3.5	V	
Data Input Voltage Swing	$V_{ID}$	300		1860	mV	

#### **ELECTRICAL CHARACTERISTICS**

PARAMETER	SYMBOL	MIN	MAX	UNIT	NOTE
Transmitter					
Transmitter Supply Current	I <sub>CCT</sub>		200	mA	
Tx_ Disable Input Voltage - Low	$V_{IL}$	0	0.8	V	
Tx_ Disable Input Voltage - High	V <sub>IH</sub>	2.0	Vcc	V	
Tx_ Fault Output Voltage - Low	$V_{OL}$	0	0.8	V	
Tx_ Fault Output Voltage - High	$V_{OH}$	2.0	Vcc	V	
Receiver					
Receiver Supply Current	I <sub>CCR</sub>		100	mA	
Receiver Data Output Differential Voltage	$V_{OD}$	0.4	1.3	V	
Rx_LOS Output Voltage - Low	$V_{OL}$	0	0.8	V	
Rx_LOS Output Voltage - High	$V_{OH}$	2.0	Vcc	V	
MOD_DEF (1), MOD_DEF (2) - Low	$V_{IL}$	-0.6	Vcc × 0.3	V	
MOD_DEF (1), MOD_DEF (2) - High	$V_{IH}$	Vcc × 0.7	Vcc + 0.5	V	

### TRANSMITTER ELECTRO-OPTICAL CHARACTERISTICS

PARAMETER	SYMBOL	MIN	TYP.	MAX	UNIT	NOTE
Optical Output Power	Po	-3		2	dBm	1
Extinction Ratio	ER	9			dB	
Center Wavelength	$\lambda_{\mathrm{c}}$	1290	1310	1325	nm	
Spectral Width (-20dB)	Δλ			1	nm	
Side Mode Suppression Ratio	SMSR	30			dB	
RIN	RIN			-120	dB/Hz	
Optical Rise time (20%-80%)	t <sub>r</sub>			260	ps	2
Optical Fall time (20%-80%)	t <sub>f</sub>			260	ps	2
Output Eye		Comp	oliant with IEE	E802.3z/D5	.0	



### RECEIVER ELECTRO-OPTICAL CHARACTERISTICS

PARAMETER		SYMBOL	MIN	TYP.	MAX	UNIT	NOTE
Maximum Input Optical F	Power	$P_{max}$	-3			dBm	3
	1.25Gb/s				-23		3
	1.06Gb/s	_			-23		3
Minimum Input Optical Power	622Mb/s	$P_{min}$			-23	dBm	4
1 OWO!	155Mb/s				-23		4
	125Mb/s				-23		3
Operating Wavelength		λ	1480		1580	nm	
Optical Return Loss		ORL	14			dB	
Receiver Electrical 3dB Upper Cutoff Frequency					1500	MHz	
LOS of Signal - Asserted		P <sub>A</sub>	-35			dBm	
LOS of Signal - Deasserted		$P_{D}$			-22	dBm	
Loss of Signal -Hysterisis		$P_D - P_A$	0.5			dB	

#### Notes:


- 1. Measured average power coupled into 9/125µm single mode fiber.
- 2. These are 20-80% values.
- 3.Measured with 2<sup>7</sup>-1 PRBS at BER<10<sup>-12</sup>
- 4. Measured with 2<sup>23</sup>-1 PRBS at BER<10<sup>-10</sup>

#### **TIMING CHARACTERISTICS**

PARAMETER	SYMBOL	MIN	TYP.	MAX	UNIT	NOTE
TX_DISABLE Assert Time	t_off			10	μs	
TX_DISABLE Negate Time	t_on			1	ms	
Time to initialize, include reset of TX_FAULT	t_init			300	ms	
TX_FAULT from fault to assertion	t_fault			100	μs	
TX_DISABLE time to start reset	t_reset	10			μs	
Receiver Loss of Signal Assert Time (off to on)	t <sub>A,RX_LOS</sub>			100	μs	
Receiver Loss of Signal Assert Time (on to off)	t <sub>D,RX_LOS</sub>			100	μs	





## **BLOCK DIAGRAM OF TRANSCEIVER**

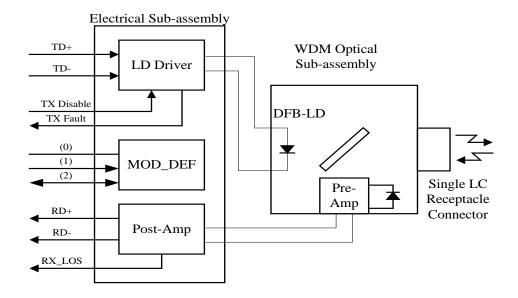



#### PIN OUT DIAGRAM OF TRANSCEIVER

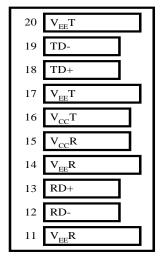

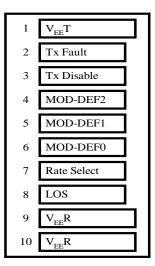

Top of Board


Buttom of Board (As Viewed through Top of Board

### PIN OUT TABLE

1 VeeT Transmitter Ground 2 TX Fault Transmitter Fault Indication 3 TX Disable Transmitter Disable – Module disables on high or open 4 MOD-DEF(2) Module Definition 2 – Two wire serial ID interface 5 MOD-DEF(1) Module Definition 1 – Two wire serial ID interface 6 MOD-DEF(0) Module Definition 0 – Grounded in module 7 Rate Select Not Connected 8 LOS Loss of Signal 9 VeeR Receiver Ground 10 VeeR Receiver Ground 11 VeeR Receiver Ground 12 RD- Inverse Received Data Out 13 RD+ Received Data Out 14 VeeR Receiver Ground 15 VccR Receiver Power 16 VccT Transmitter Power 17 VeeT Transmitter Power 18 TD+ Transmitter Data In 19 TD- Inverse Transmitter Data In	Pin	Symbol	Functional Description
TX Disable Transmitter Disable – Module disables on high or open  MOD-DEF(2) Module Definition 2 – Two wire serial ID interface  MOD-DEF(1) Module Definition 1 – Two wire serial ID interface  MOD-DEF(0) Module Definition 0 – Grounded in module  Rate Select Not Connected  LOS Loss of Signal  VeeR Receiver Ground  VeeR Receiver Ground  RD- Inverse Received Data Out  RD- Receiver Ground  VeeR Receiver Ground  VeeR Receiver Ground  RD- Receiver Ground  VeeR Receiver Data Out  VeeR Receiver Ground  Tock  Transmitter Power  Transmitter Power  Transmitter Data In  Inverse Transmitter Data In	1	VeeT	Transmitter Ground
4 MOD-DEF(2) Module Definition 2 – Two wire serial ID interface 5 MOD-DEF(1) Module Definition 1 – Two wire serial ID interface 6 MOD-DEF(0) Module Definition 0 – Grounded in module 7 Rate Select Not Connected 8 LOS Loss of Signal 9 VeeR Receiver Ground 10 VeeR Receiver Ground 11 VeeR Receiver Ground 12 RD- Inverse Received Data Out 13 RD+ Received Data Out 14 VeeR Receiver Ground 15 VccR Receiver Ground 16 VccT Transmitter Power 17 VeeT Transmitter Ground 18 TD+ Transmitter Data In 19 TD- Inverse Transmitter Data In	 2	TX Fault	Transmitter Fault Indication
5 MOD-DEF(1) Module Definition 1 – Two wire serial ID interface 6 MOD-DEF(0) Module Definition 0 – Grounded in module 7 Rate Select Not Connected 8 LOS Loss of Signal 9 VeeR Receiver Ground 10 VeeR Receiver Ground 11 VeeR Receiver Ground 12 RD- Inverse Received Data Out 13 RD+ Receiver Ground 14 VeeR Receiver Ground 15 VccR Receiver Ground 16 VccT Transmitter Power 17 VeeT Transmitter Ground 18 TD+ Transmitter Data In 19 TD- Inverse Transmitter Data In	3	TX Disable	Transmitter Disable – Module disables on high or open
6 MOD-DEF(0) Module Definition 0 – Grounded in module 7 Rate Select Not Connected 8 LOS Loss of Signal 9 VeeR Receiver Ground 10 VeeR Receiver Ground 11 VeeR Receiver Ground 12 RD- Inverse Received Data Out 13 RD+ Received Data Out 14 VeeR Receiver Ground 15 VccR Receiver Power 16 VccT Transmitter Power 17 VeeT Transmitter Ground 18 TD+ Transmitter Data In 19 TD- Inverse Transmitter Data In	 4	MOD-DEF(2)	Module Definition 2 – Two wire serial ID interface
7 Rate Select Not Connected 8 LOS Loss of Signal 9 VeeR Receiver Ground 10 VeeR Receiver Ground 11 VeeR Receiver Ground 12 RD- Inverse Received Data Out 13 RD+ Receiver Ground 14 VeeR Receiver Ground 15 VccR Receiver Ground 16 VccT Transmitter Power 17 VeeT Transmitter Ground 18 TD+ Transmitter Data In 19 TD- Inverse Transmitter Data In	5	MOD-DEF(1)	Module Definition 1 – Two wire serial ID interface
8 LOS Loss of Signal 9 VeeR Receiver Ground 10 VeeR Receiver Ground 11 VeeR Receiver Ground 12 RD- Inverse Received Data Out 13 RD+ Received Data Out 14 VeeR Receiver Ground 15 VccR Receiver Ground 16 VccT Transmitter Power 17 VeeT Transmitter Ground 18 TD+ Transmitter Data In 19 TD- Inverse Transmitter Data In	 6	MOD-DEF(0)	Module Definition 0 – Grounded in module
9         VeeR         Receiver Ground           10         VeeR         Receiver Ground           11         VeeR         Receiver Ground           12         RD-         Inverse Received Data Out           13         RD+         Received Data Out           14         VeeR         Receiver Ground           15         VccR         Receiver Power           16         VccT         Transmitter Power           17         VeeT         Transmitter Ground           18         TD+         Transmitter Data In           19         TD-         Inverse Transmitter Data In	7	Rate Select	Not Connected
10         VeeR         Receiver Ground           11         VeeR         Receiver Ground           12         RD-         Inverse Received Data Out           13         RD+         Received Data Out           14         VeeR         Receiver Ground           15         VccR         Receiver Power           16         VccT         Transmitter Power           17         VeeT         Transmitter Ground           18         TD+         Transmitter Data In           19         TD-         Inverse Transmitter Data In	 8	LOS	Loss of Signal
11         VeeR         Receiver Ground           12         RD-         Inverse Received Data Out           13         RD+         Received Data Out           14         VeeR         Receiver Ground           15         VccR         Receiver Power           16         VccT         Transmitter Power           17         VeeT         Transmitter Ground           18         TD+         Transmitter Data In           19         TD-         Inverse Transmitter Data In	9	VeeR	Receiver Ground
12         RD-         Inverse Received Data Out           13         RD+         Received Data Out           14         VeeR         Receiver Ground           15         VccR         Receiver Power           16         VccT         Transmitter Power           17         VeeT         Transmitter Ground           18         TD+         Transmitter Data In           19         TD-         Inverse Transmitter Data In	 10	VeeR	Receiver Ground
13         RD+         Received Data Out           14         VeeR         Receiver Ground           15         VccR         Receiver Power           16         VccT         Transmitter Power           17         VeeT         Transmitter Ground           18         TD+         Transmitter Data In           19         TD-         Inverse Transmitter Data In	11	VeeR	Receiver Ground
14         VeeR         Receiver Ground           15         VccR         Receiver Power           16         VccT         Transmitter Power           17         VeeT         Transmitter Ground           18         TD+         Transmitter Data In           19         TD-         Inverse Transmitter Data In	12	RD-	Inverse Received Data Out
15 VccR Receiver Power  16 VccT Transmitter Power  17 VeeT Transmitter Ground  18 TD+ Transmitter Data In  19 TD- Inverse Transmitter Data In	13	RD+	Received Data Out
16 VccT Transmitter Power 17 VeeT Transmitter Ground 18 TD+ Transmitter Data In 19 TD- Inverse Transmitter Data In	14	VeeR	Receiver Ground
17 VeeT Transmitter Ground 18 TD+ Transmitter Data In 19 TD- Inverse Transmitter Data In	15	VccR	Receiver Power
18 TD+ Transmitter Data In 19 TD- Inverse Transmitter Data In	16	VccT	Transmitter Power
19 TD- Inverse Transmitter Data In	 17	VeeT	Transmitter Ground
	18	TD+	Transmitter Data In
20 VeeT Transmitter Ground	 19	TD-	Inverse Transmitter Data In
	20	VeeT	Transmitter Ground




### RECOMMENDED CIRCUIT SCHEMATIC

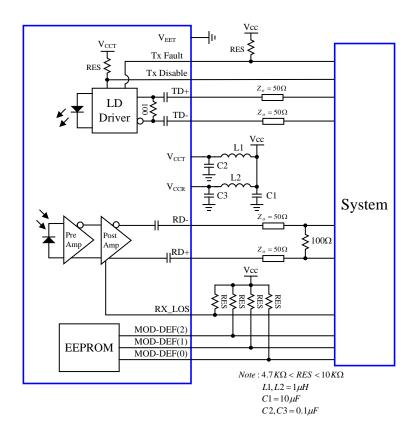

### **MECHANICAL DIMENSIONS**

Units in mm

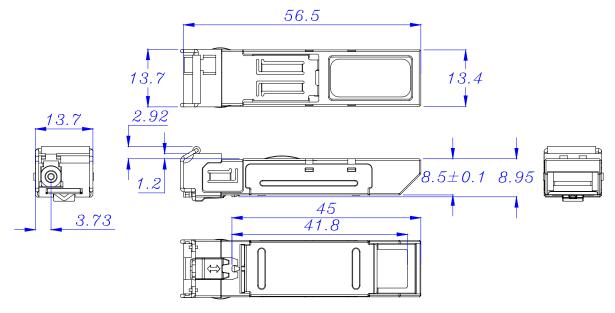

All dimensions are ±0.2mm unless otherwise specified.

