


# EasyDrive II

## PC Card Drive with IDE interface

- ◆ PC Card Drive (internal) in standard 3.5" case; 40-pin IDE connector with 2.54 mm pin spacing
- ◆ Double slot at the front for PC Card memory media with True IDE Mode such as ATA Flash PC Cards (2 x Type I or II or 1 x Type III); I/O PC Cards not supported
- ◆ Each slot appears under Windows as a separate removable media drive
- ◆ By using the appropriate PC Card adapter compatible with CompactFlash, Microdrive miniature hard disks, SD Cards, MultiMediaCards, Memory Sticks or xD-Cards
- ◆ Without drivers compatible with MS Windows 95b/98, ME, 2000 and XP; Linux Kernel 2.4 or later; Mac OS X 10.3 or later
- ◆ Support hotline and rapid service directly from the manufacturer

**24 Months Warranty**

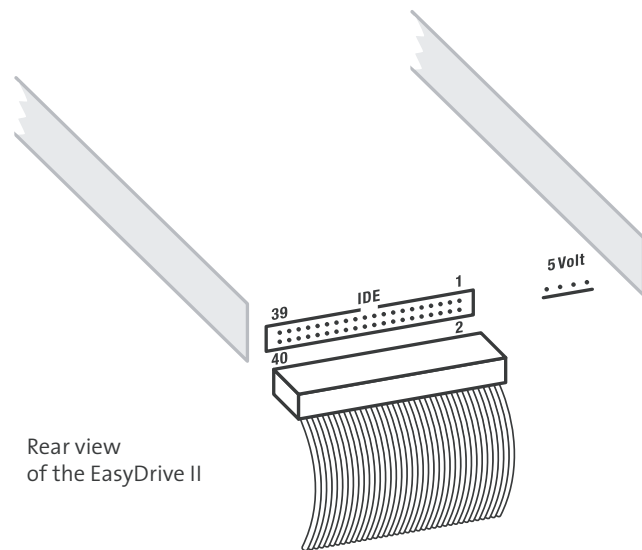

## Technical Specifications

**RoHS** COMPLIANT 2002/95/EC

Item no. B22AL125

### Hardware

- Interface IDE, 40-pin, 2.54 mm pin spacing
- Memory card slots 2 x Type I or II, or 1 x Type III PC Card memory media w. True IDE Mode
- Dimensions LxWxH: 149 x 101.6 x 25.4 mm; standard 3.5" drive dimensions

### Electrical

- DC input voltage 5 Volt  $\pm$ 5%
- Power consumption approx. 50-60 mA (w/o memory)

### Environmental Specifications

- Temperature 0° to +70°C (operating)  
–20° to +70°C (non-operating)
- Humidity 0% to 90%, non-condensing

### Software

- Supported OS Windows 95b/98, ME, 2000, XP; Linux Kernel 2.4 or later; Mac OS X 10.3 or later

altec ComputerSysteme GmbH  
 Bayernstr. 10 · 30855 Langenhagen · Germany  
 Phone +49-511-9 83 81-0 · Fax +49-511-9 83 81-49  
 eMail: info@altec-cs.com  
 Web: www.altec-cs.com

ISO 9001:2000 certified



**altec**  
card copy machines