


PER-C30F

Mini PCI 3-port IEEE 1394a Module

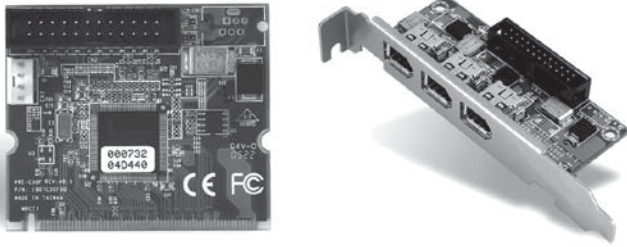

Features

- Three IEEE 1394a Ports up to 400Mbps
- TI Single Chip for IEEE 1394a Solution

Packing List

- Flat Cable
- PER-T010 daughter board
- Quick Installation Guide
- Utility CD
- PER-C30F

Ordering Information


- **TF-PER-C30F-A10**
Mini PCI, 3-port IEEE 1394a Module, Rev. A1.0

Specifications

Form Factor	Mini PCI Type III A 2" x 2.35" (50.8mm x 59.6mm)
IEEE1394a Chipset	TI TSB43AB23
Power Requirement	+3.3V, +5V, +12V
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)

PER-V01B

Mini PCI DVI to TTL Module



Features

- DVI to TTL LCD Signal Conversion
- Resolution up to 1024 x 768

Packing List

- Quick Installation Guide
- PER-V01B

Ordering Information

- **TF-PER-V01B-A10**
Mini PCI, DVI to TTL LCD, Signal Conversion Module, for 640x480 Panel, Rev. A1.0
- **TF-PER-V01B-A10-01**
Mini PCI, DVI to TTL LCD, Signal Conversion Module, for 800x600 Panel, Rev. A1.0
- **TF-PER-V01B-A10-02**
Mini PCI, DVI to TTL LCD, Signal Conversion Module, for 1024x768 Panel, Rev. A1.0

Optional Accessories

- **1703200151**
20P-20P Terminal Cable

Specifications

Form Factor	Mini PCI Type III A 2" x 2.35" (50.8mm x 59.6mm)
Signal Conversion Chipset	Silicon Image™ Sil1160CTU
Power Requirement	+3.3V
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)