


PER-C40C

Mini PCI 2/4 RS-232 COM Ports Module

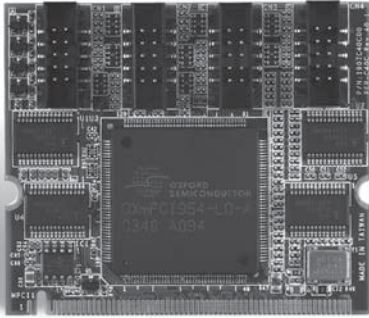

Specifications

Form Factor	Mini PCI Type III A 2" x 2.35" (50.8 mm x 59.6 mm)
UART Chipset	OXFORD OXmPCI952 or OXmPCI954
Power Requirement	+3.3V
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)

Features

- Mini PCI Type III Interface
- Two or Four RS-232 Ports Onboard
- Full Duplex Serial Communication

Packing List


- RS-232 Cable
- Quick Installation Guide
- Utility CD
- PER-C40C

Ordering Information

- **TF-PER-C40C-A10**
Mini PCI 2-port RS-232 Module, Rev. A1.0
- **TF-PER-C40C-A10-01**
Mini PCI 4-port RS-232 Module, Rev. A1.0

PER-C20S

Mini PCI 2 Ports SATA I Module

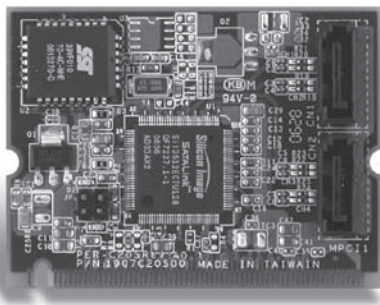

Specifications

Form Factor	Mini PCI Type III B 1.8" x 2.35" (44.5mm x 59.6mm)
Controller	Silicon Image™ Sil 3512
Function	Provide two SATA I Ports, support RAID 0,1 function
Speed	1.5Gbps
Power Requirement	+3.3V
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)

Features

- Mini PCI Type III Interface
- Silicon Image™ Sil 3512 2-Port Serial ATA Host Controller
- RAID 0,1
- +3.3V Only Operation

Packing List

- SATA Cable
- Quick Installation Guide
- Utility CD
- PER-C20S

Ordering Information

- **TF-PER-C20S-A10**
Mini PCI, 2-Port SATA I Module, Rev. A1.0