




S6000K Spillseal® Washable Antimicrobial Protected Keyboard

SpillSeal® protected water and dustproof keyboard to NEMA4X and IP66, meaning you can wash and disinfect the keyboard in Hospital grade cleaning solutions, helping reduce the spread of germs and cross infection. The keyboard can be used with confidence in many different environments such as Health-care, Education, Military, Commercial and safely wash it under the tap.

Antimicrobial Product Protection is incorporated into the plastic providing a powerful broad-spectrum inorganic, silver-based biocide for product protection.

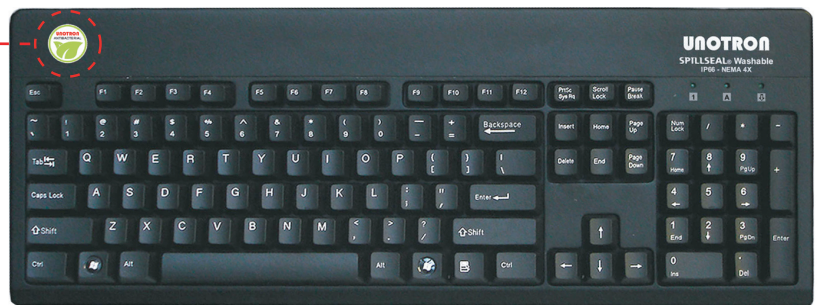

Features and benefits

- SpillSeal® protected water and dustproof keyboard to NEMA4X and IP66.
- Easy to disinfect, immerse in antibacterial solutions to reduce the spread of germs.
- Washable and waterproof, sealed keys lets you wash and fully clean the keyboard.
- Responsive touch typing keystroke without the stiffness of traditional rubber keyboards.
- Detachable ergonomic wrist support, adds comfort for extended use and is easily removed when not required.
- Easy Installation – Plug and Play with Windows® 98/ME/2000/XP/Vista and Mac with no extra software or complicated set-up.
- Order Information: Black (S6000K-B) or Gray (S6000K-G).
- Package Content: SpillSeal® Washable Antimicrobial Protected Keyboard, Ergonomic Wrist Support, Installation / User Guide.

Technical specifications

Key layout:	104 (US) layout, 105(EU) layout - depending on country	Operating temp.:	50° to 122° F (10° to 50° C)
Size(l)x(w)x(h):	449 x 168 x 35 (mm)	Non-Operating temp.:	--4° to 149° F (-20° to 65° C)
Weight:	770 (gm)	Operating Humidity:	10% to 95% (non-condensing)
Operating voltage:	+ 5VDC +/- 5%	Non-Operating Humidity:	0% to 95% (non-condensing)
Power Consumption:	50mA (with 3 LED's ON)	Wrist support:	Removable
System Interface:	USB Type A plug connector	Keyboard feet:	Adjustable
Key type:	Full travel - ergonomic form	Cable Length:	2.2M
Key Switch Type:	Contamination-resistant switch membrane	Agency approval/standards:	UL, cUL, FCC, CE, VCCI, BSMI, C-Tick, IP66/NEMA4X, KCC, USB-IF, WHQL, EN/IEC 60601-1, RoHS, WEEE
Key travel:	3.8+/-0.3 (mm)	Water/dust resistant:	Water & Dust Proof, IP66 & NEMA4X
Contact bounce:	15 (ms) maximum	Antibacterial Product Protection:	Silver-based Antibacterial Additive
Key operating force:	55+/-10 gf	OS compatibility:	Windows 98/ME/2000/XP/Vista/Mac
Actuation life:	20 million (cycles)	Connection Type:	USB, PS2 with Adapter
Legend type:	Laser Etched	Language:	UK, US, European (ask for details)
Acoustics:	43-dBA maximum sound pressure level		