


OEM Bluetooth-Serial Module, Parani™ ESD110V2

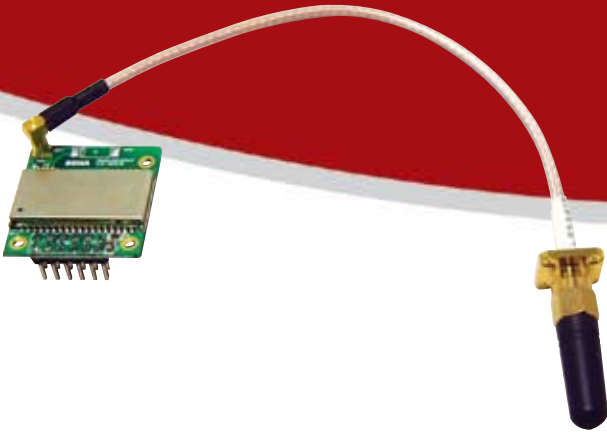

Features


- Output Interface UART, Bluetooth Specification v2.0+EDR
- Transmit Power - Max. 18dBm
- Receiving Sensitivity : 90dBm(0.1%BER)
- Compact size - 27.5 x 30.0 x 14.0 (mm)
1.08 x 1.18 x 0.55 (in)
- Provides transparent RS232 serial cable replacement.
- Profile : Bluetooth Serial Port Profile.
- Interoperability with PDA, laptops etc.
- Firmware upgrade via windows-based software (ParaniUpdater)
- Working distance (In an open field):
Nom. 100 meters, up to 1000m using patch antenna
- Easy to use Windows configuration tool available.
- No external drivers required.

The **Parani-ESD110V2** is a Bluetooth v2.0+EDR Class1 type Embedded Bluetooth serial module for RS232 cable replacement. The Parani-ESD110V2 is a compact size Bluetooth serial module. By default, it supports 100 meters of wireless transmit distance. The Parani-ESD110V2 has an extension option so that users can extend the transmit distance up to 1,000 meters using optional antennas.

Typical application areas of the Parani-ESD110V2 include:

- RS232 cable replacement
- Wireless Factory monitoring
- Truck/Bus monitoring system
- PLC programming
- Car Diagnostics
- Wireless Printing
- Wireless POS system
- Wireless logistics
- Wireless machine(healthcare/industrial) monitoring

Pin Assignment

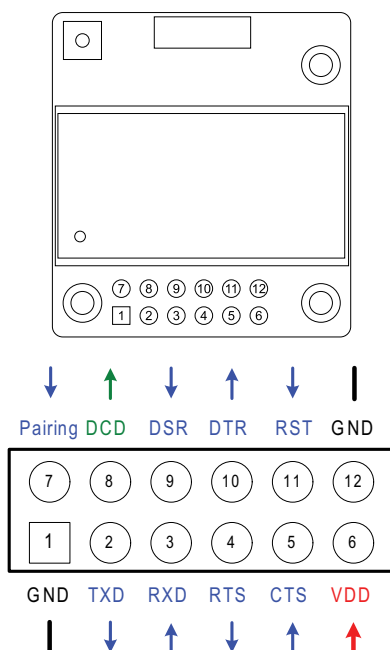

Pin #	Signal	Direction	Description	Signal Level
1	GND	-	Power Ground	Ground
2	TxD	Output	UART Data Output	TTL
3	RxD	Input	UART Data Input	TTL
4	RTS	Output	UART Ready to Send	TTL
5	CTS	Input	UART Clear to Send	TTL
6	VDD	Input	DC Input (3.0~3.3V)	Power
7	Pairing	Input	Pairing Input (Active Low)	TTL
8	DCD	Output	Bluetooth Connect Detect (Active Low)	TTL
9	DSR	Input	Data Set Ready	TTL
10	DTR	Output	Data Terminal Ready	TTL
11	RST	Input	Reset (Active Low)	TTL
12	GND	-	Power Ground	Ground

Specifications

Serial Interface

- UART interface, 2.54mm Pin Header 2X6 (12pin)
- Serial UART speed up to 921.6kbps
- CTS/RTS flow control, DTR/DSR for loop-back & full transfer

Bluetooth

- Bluetooth v2.0 + EDR Class1
- Level - 18 dBm
- Profile: Serial Port Profile
- Working distance :

Stub Antenna (+1dBi)	- Stub Antenna (+1dBi)	- 100 meters
Stub Antenna (+1dBi)	- Dipole Antenna (+3dBi)	- 150 meters
Dipole Antenna (+3dBi)	- Dipole Antenna (+3dBi)	- 200 meters
Dipole Antenna (+3dBi)	- Dipole Antenna (+5dBi)	- 300 meters
Dipole Antenna (+3dBi)	- Patch Antenna (+9dBi)	- 500 meters
Dipole Antenna (+5dBi)	- Dipole Antenna (+5dBi)	- 400 meters
Dipole Antenna (+5dBi)	- Patch Antenna (+9dBi)	- 600 meters
Patch Antenna (+9dBi)	- Patch Antenna (+9dBi)	- 1000 meters

Max. Tx power: 18 dBm

Receive Sensitivity: 90 dBm

Configuration: ParaniWIN, ParaniWizard, Modem AT command set

Firmware upgrade: by ParaniUpdater

Power

- Supply voltage: 3.3V DC
- Supply current: 10mA - 60mA

Environmental

- Operating temperature: -30°C to 80°C
- Storage temperature: -40°C to 85°C
- Humidity: 90% Non-condensing

Physical properties

- Dimension:
 - 27.5 mm L (1.08 in)
 - 30.0 mm W (1.18 in)
 - 14.0 mm H (0.55 in)
- Weight: 6g


Regulatory Approvals: FCC, CE, TELEC, KCC, SIG

SIG QDID: B015896

Warranty: 1-year Limited Warranty

Parani-ESD110V2 Starter Kit

Parani-ESD110V2 Starter Kit includes the development board with the sample circuitry for Parani-ESD110V2 interface, power, RS232 Interface, Reset, LEDs, Pairing, H/W flow control for user device development.

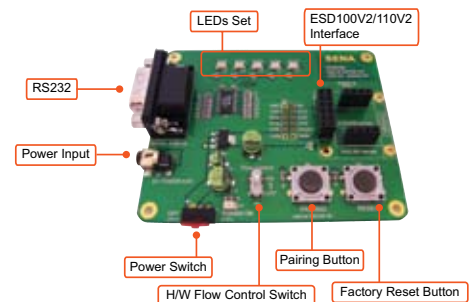

Ordering Information

Part number	Description/Package Contents
ESD110V2-00	Parani-ESD110V2 OEM Bluetooth-Serial Module-Class 1 Bluetooth v2.0+EDR with antenna extension option (module only - antenna and cable NOT included) Package contents: - Parani-ESD110V2 Module Only (antenna and cable NOT included)
ESD110V2-01	Parani-ESD110V2 OEM Bluetooth-Serial Module-Class 1 Bluetooth v2.0+EDR with antenna extension option (antenna and cable included) Package contents: - Parani-ESD110V2 Module - Stub Antenna - Antenna extension cable
ESD110V2SK-01	Starter Kit for Parani-ESD110V2, ESD110V2 included. Package contents: - Parani-ESD110V2 Module - Development board - Serial data cable - DC Power Adapter - A hardcopy of Quick Start Guide - CD-ROM including the Configuration S/W and User Guide

Optional Accessories

Part number	Description
SAT-G01	1 dBi Stub Antenna - SMA Male-Left-Hand Thread
SAT-G01R	1 dBi Stub Antenna - RP-SMA Plug Right-hand Thread
DAT-G01	3 dBi Dipole Antenna - SMA Male-Left-Hand Thread
DAT-G01R	3 dBi Dipole Antenna - RP-SMA Plug Right-hand Thread
DAT5-G01R	5 dBi Dipole Antenna - RP-SMA Plug Right-hand Thread
PAT-G01	9 dBi Patch Antenna with SMA Male-Left-Hand Thread Default Cable
PAT-G01R	9 dBi Patch Antenna with RP-SMA Plug Right hand Thread Default Cable
RFC-G01	1m Antenna Extension Cable for Patch Antenna PAT-G01
RFC-G01R	1m Antenna Extension Cable for Patch Antenna PAT-G01R
EEC-G01	15cm SMA Left-Hand Thread Antenna Extension Cable for ESD110V2/210
EEC-G01R	15cm RP-SMA Right-Hand Thread Antenna Extension Cable for ESD110V2/210

For more information,
please visit us at <http://www.sena.com>

U.S. / Canada / South America
Tel : +1 (408) 573-7425 Fax : +1 (408) 907-3738
Toll Free (US/Canada): 1-8668-US-SENA (1-866-887-7362)

EU / Africa
Tel : +33 (0) 1 53 53 16 29 Fax : +33 (0) 1 70 24 70 90

Asia / Pacific
Tel : +82-2-571-8283 Fax : +82-2-573-7710

Contact us via E-mail
General Information : info@sena.com
Sales & Distribution : sales@sena.com
Technical Support : support@sena.com