



## Main Features

- Built-in Intel® Atom™ D510 Dual Core 1.66GHz processor
- Internal wireless communication (3.5G, GSM/ GPRS, WLAN, BT)
- Smarter ignition power on/off, delay-time and low voltage protection
- PCI-104 and mini card expansion interface
- 8~60V wide range DC power input
- Dual VGA output (clone mode)
- Rugged fanless design to meet MIL standard

## Product Overview

NEXCOM's popular VTC Series range has been extended with the launch of VTC 6200-NI, a dedicated computing solution for in-vehicle surveillance applications. The VTC 6200-NI utilizes the powerful video processing capability of the of Intel® Atom™ D510 processor which can support Dual Core technology. With additional Video Capture Module, VTC 6200-NI is the ideal solution for in-vehicle surveillance applications.

## Specifications

### CPU

- Intel® Atom™ D510 Dual Core 1.6GHz

### Main Chipset

- ICH8M

### Memory

- One 200-pin DDR2 667/800MHz SO-DIMM slot (up to 2GB)

### Expansion

- 1 x Mini-PCIe socket (PCIe + USB) for WLAN option
- 1 x Mini-PCIe socket (USB) x 1 for WWAN option
- 1 x Bluetooth module for option
- 1 x Bundle GPS module or optional GPS with dead reckoning
- 1 x PCI-104

### I/O Interface-Front

- 1 x Line-out, 1 x Mic-in
- 1 x SIM card socket
- 1 x System reset button
- 2 x USB 2.0 host type A connector
- 4 x LED's for power, storage, WLAN/ HSDPA and GPIO
- 1 x Power button
- 4 x Antenna hole reserved for SMA-type antenna connector (WWAN/WLAN/BT)

### I/O Interface-Rear

- 1 x 8~60VDC input with Ignition and 23W typical power consumption
- 1 x 5V/1A and 12V/1A DC output, SMBus
- Fuse
- 1 x DB9 female connector for isolated 4GPI and 4GPO
- 2 x DB15 VGA (clone mode)
- 1 x DB26 LVDS interface with 12V and USB2.0
- 2 x DB9 RS-232 (COM1, COM2)
- 1 x DB9 RS-485 (COM3)
- 1 x Line-out, 1 x Mic-in
- 2 x USB 2.0 host type A connector
- 1 x RJ45 with LEDs for 10/100/1000Mbps Ethernet
- 1 x SMA-type GPS antenna connector

### Expandable Storage

- 1 x 2.5" SATA II HDD bay
- 1 x SATA DOM


### Power Management

- Selectable boot-up & shut-down voltage for low power protection by software
- Setting 8-level on/off delay time by software
- Status of ignition and low voltage status can be detected by software
- Support S3/S4 suspend mode

### Operating System

- Windows XP/ WES2009
- WES 7E

## Dimension Drawing

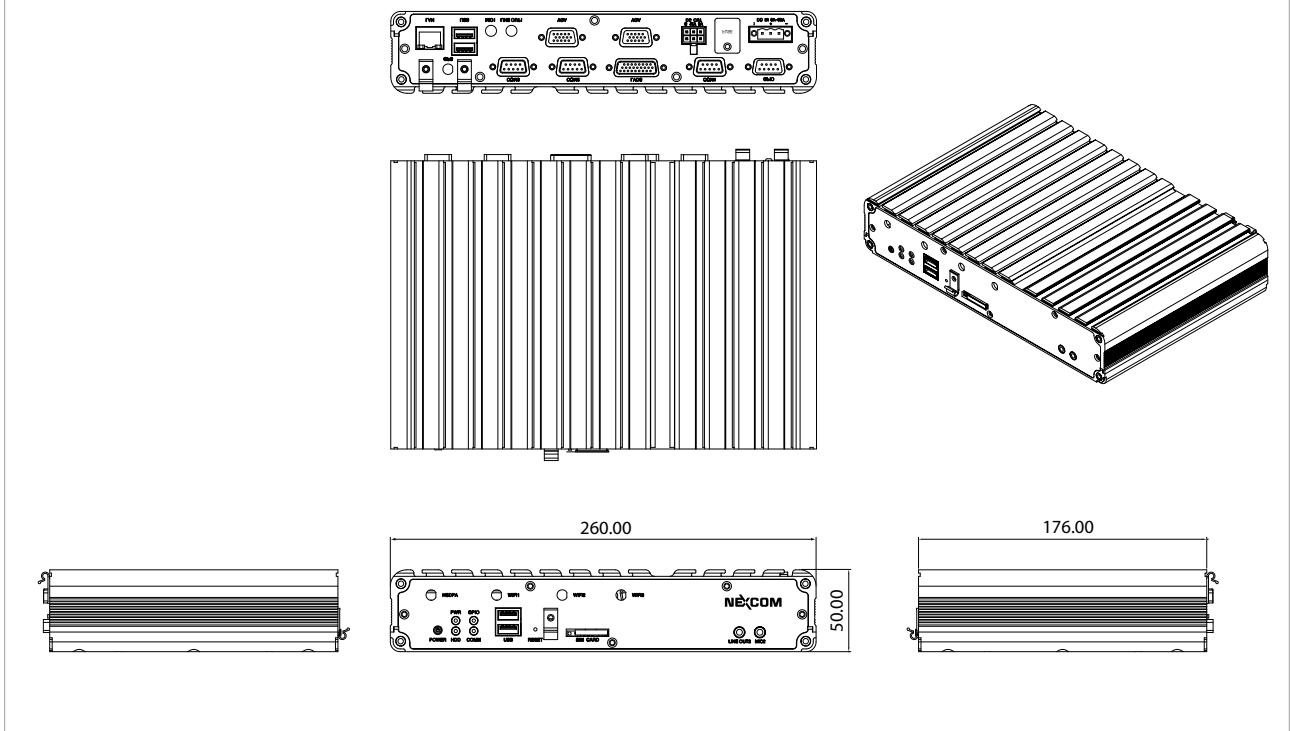

### Dimensions

- 260mm (W) x 176mm (D) x 50mm (H) (10.24" x 6.93" x 1.97")
- 2.19 Kg (4.82 Lb)

### Construction

- Aluminum enclosure with fanless design

### Environment

- Operating temperatures :
  - Ambient with air -30°C to 60°C (SSD)/-30°C to 50°C (HDD)
- Storage temperatures : -40°C to 80°C
- Relative humidity : 10% to 90% (Non-condensing)
- Vibration (random) :
  - 2g@5~500 Hz with SSD; 1g@5~500 Hz with HDD (in operation)
- Vibration (with SSD) :
  - Operating : MIL-STD-810F, Method 514.5, Category 20, Ground Vehicle – Highway Truck
  - Storage : MIL-STD-810F, Method 514.5, Category 24, Integrity Test
- Shock (with SSD) :
  - Operating : MIL-STD-810F, Method 516.5, Procedure I, Trucks and semi-trailers=20g
  - Crash hazard : MIL-STD-810F, Method 516.5, Procedure V, Ground equipment=75g

### Standards/Certifications

- CE approval
- FCC Class B
- e13 Mark

## Ordering Information

- **VTC 6200-NI (P/N : 10V00620002X0)**  
Intel® Atom™ D510 1.66GHz processor, 1GB DDR2, GPS module and GPS antenna
- **VTC 6200-NI-DK (P/N : 10V00620006X0)**  
Intel® Atom™ D510 1.66GHz processor, 1GB DDR2, dead reckoning GPS module and GPS antenna

### • VTC 6200-VR4 (P/N : 10V00620009X0)

Intel® Atom™ D510 1.66GHz processor, 1GB DDR2, GPS module, GPS antenna and 4CH Capture card

### • Optional Accessories

Part No.	Description
10VD010000X0	VMD 1000-B 7" monitor w/touch screen
10VD0100101X0	VMD 1001-B 7" Monitor w/touch screen, VGA interface
10VD020000X0	VMD 2000-B 8" Monitor w/touch screen
10VD0200200X0	VMD 2002-B 8" Monitor w/touch screen, cable integration
10VK0033V00X0	VTK 33V, anti-vibration/fan Kit
10VK0061B00X0	VTK 61B, back-up battery kit for 4 hours in system full loading
10VK0060P00X0	VTK 60P, IP65 protection kit for VTC 6000
10VK0061P00X0	VTK 61P, IP65 protection kit for VTC 61XX series & VTC 6200-NI
10VK0006013X0	Wireless mini card kit, Ralink 802.11b/g/n 2T2R, QCOM : Q802XKN5F, w/antenna & cable (without assembly in NEXCOM)
10VK00WWAN01X0	Cinterion PHS8-P kit, Five bands, UMTS/HSPA (850/800, 900, 1900 and 2100 MHz), Quad-Band GSM w/ internal cable, antenna & packing (without assembly in NEXCOM)
10VK00GPS00X0	SKYTRAQ GPS + GLONASS, w/antenna & cable
10VK0006007X0	Bluetooth kit, QCOM QBTM400-01(V7), w/antenna & cable (without assembly in NEXCOM)
7400120002X00	Power adapter FSP : 120-AAB (N09001), 120W 19V/6.3A
60233SAM03X00	Internal cable for GSM/WLAN/GPS antenna connection MOQ : 20 pcs
60233SAM05X00	GPS antenna/5m/SMA180P
60233SAM07X00	GSM/GPRS antenna, SMA, support 850, 900, 1800, 1900
60233SMA30X00	GPS+GSM combo antenna 5M/SMA180P
60233SAM17X00	GPRS/UMTS/HSDPA antenna, SMA, support 850, 900, 1800, 1900 and 2100 MHz