



## Main Features

- ♦ Build-in Intel® Core™ i7 2610UE 1.5G Hz processor
- ♦ Support two Ethernet LAN ports
- ♦ Removable 2.5" SSD tray and CFast slot
- ♦ OBDII support of SAE J1939 or J1708
- ♦ Support two SIM card slots
- ♦ PCI-104 socket
- ♦ 9~36V wide range DC power input
- ♦ Smarter power management and low voltage protection
- ♦ Support isolation digital input/output and analog input
- ♦ Rugged fanless design to meet MIL standard
- ♦ Support Isolation RS-232 and RS-422/485
- ♦ Wake on RTC/SMS via WWAN module

## Product Overview

VTC 7110-D1K, adopting the high performance processor, Intel® Core™ i7, is a new generation of VTC series. In addition to keep the advantage of existing VTC series, it offers dual LAN ports for redundancy, two high speed interface for storage, 2.5" SATA and CFast. The storage is easily accessible from the front side for maintenance concern. Furthermore, it offers the OBDII for heavy duty truck such as SAE J1939/J1708 and isolation digital input, output, RS-232 and RS-422/485. With the rich features, VTC7110-D1K can satisfy your demand in vehicle applications.

## Specifications

### CPU

- ♦ Intel® Core™ i7 2610UE 1.5GHz

### Main Chipset

- ♦ QM67

### Memory

- ♦ One 204-pin DDR3 1333MHz SO-DIMM slot (up to 8GB)

### Expansion

- ♦ 1 x Mini-PCIe socket (PCIe + USB) for WLAN option
- ♦ 1 x Mini-PCIe socket (USB) for WWAN option
- ♦ 1 x Bluetooth module for option
- ♦ 1 x on board uBlox NEO-6Q GPS module or optional GPS with dead reckoning

### I/O Interface-Front

- ♦ 1 x Line-out, 1 x Mic-in (For WWAN CM8000 voice communication)
- ♦ 2 x SIM card socket (selectable)
- ♦ 1 x System reset button
- ♦ 1 x USB 2.0 host type A connector
- ♦ 1 x Power button
- ♦ 1 x CFast with protection cover
- ♦ 1 x Accessible 2.5" SATA II SSD tray (optional lockable storage available)
- ♦ 2 x DB9 isolation RS-422/485, Isolation: 5K Vrms
- ♦ 3 x DB9 isolation RS-232, Isolation: 5K Vrms
- ♦ 4 x LED's for power, storage, WLAN/WWAN and GPIO
- ♦ G sensor


### I/O Interface-Rear

- ♦ 1 x 9~36VDC input with ignition and 38W typical power consumption

- ♦ 1 x 12V/4A DC output, SMBus
- ♦ 1 x DB26 LVDS interface with 12V and USB2.0
- ♦ 1 x DB-15 VGA
- ♦ 1 x DB9 RS-232 (default) or OBDII (option)
- ♦ 1 x DB9 RS-422/485
- ♦ 1 x DB9 female connector for 4 x DI and 4 x DO (Digital Input)
  - Input Voltage (Internal Type) : 5VDC TTL (default)
  - Input Voltage (Source Type) : 3~12 VDC
- ♦ 10-Pin terminal block for 8 x DI and 8 x DO (Digital Output)
  - Digital Output (Sink Type) : 5VDC TTL (default), max current : 20mA
  - Digital Output (Source Type) : 3~24VDC, max current: 250mA
- ♦ Isolation : 5K Vrms (Isolated Digital Input)
  - Input Voltage (Internal Type) : 5VDC TTL (default)
  - Input Voltage (Source Type) : 3~12 VDC
- ♦ Isolation : 2K Vrms (Isolated Digital Output)
  - Digital Output (Sink Type) : 5VDC TTL (default), max current : 20mA
  - Digital Output (Source Type) : 3~24 VDC, max current : 250mA
- ♦ 5-Pin terminal block for 3 x analog input
  - Isolation : 2K Vrms
  - 2 x isolated analog voltage input 12VDC (Max.)
  - 1 x isolated analog current input 10A (Max.)
- ♦ 2 x USB 2.0 host type A connector
- ♦ 2 x RJ45 with LEDs for 10/100/1000Mbps Ethernet
- ♦ 1 x Line-out, 1 x Mic-in
- ♦ 1 x DB9 male connector for 1 x OBDII (default) or 2 x OBDII (option)
- ♦ 1 x SMA-type GPS antenna connector
- ♦ 4 x Antenna hole reserved for SMA-type antenna connector (WWAN/WLAN/BT)



## Dimension Drawing

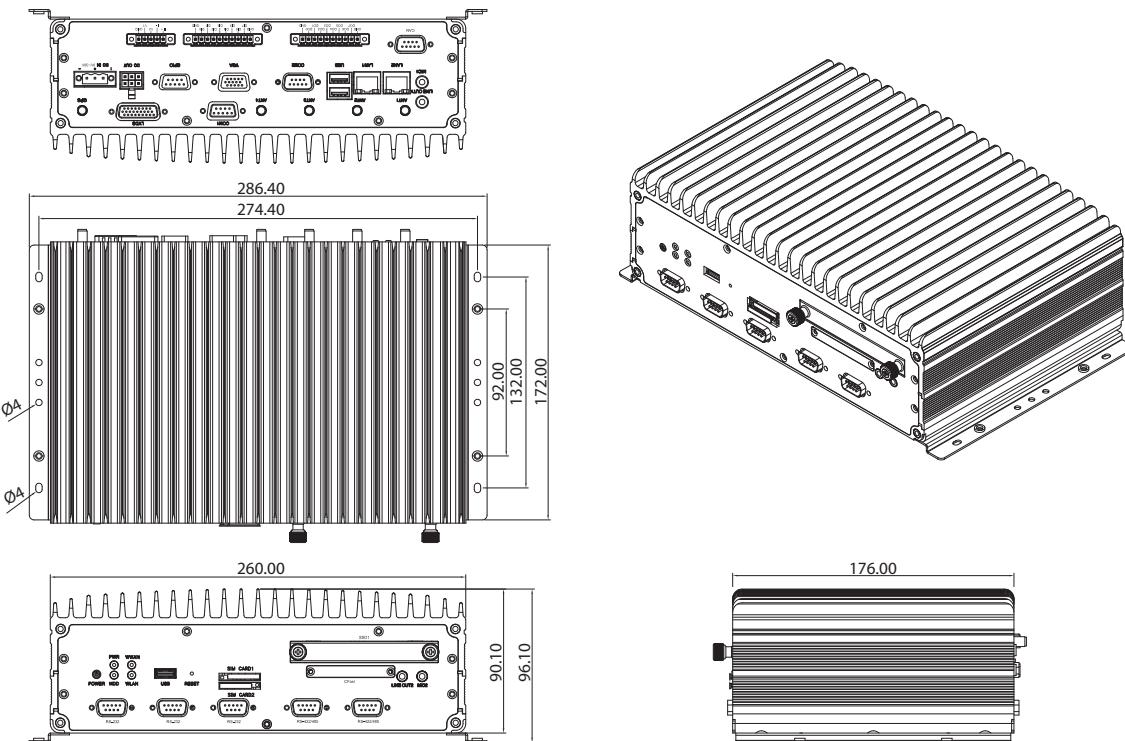

### Power Management

- Selectable boot-up & shut-down voltage for low power protection by software
- Setting 8-level on/off delay time by software
- Status of ignition and low voltage status can be detected by software
- Support S3/S4 suspend mode

### Operating System

- Windows XP/WES2009
- WES 7E
- Win7 Pro for Embedded
- Linux 2.6

### Dimensions

- 260mm (W) x 176mm (D) x 90.1mm (H) (10.24"x 6.93"x 3.51")
- 3.89 Kg (8.57 Lb)

### Construction

- Aluminum enclosure with fanless design

### Environment

- Operating temperatures: -30°C to 50°C (w/ industrial SSD) with air flow  
-20°C to 45°C (w/ commercial HDD) with air flow
- Storage temperatures : -35°C to 85°C
- Relative humidity : 10% to 90% (non-condensing)
- Vibration (random) : 1g@5~500 Hz (in operation, SSD)
- Vibration (SSD) :
  - Operating : MIL-STD-810G, Method 514.6, Category 4, common carrier US highway truck vibration exposure
  - Storage : MIL-STD-810G, Method 514.6, Category 24, minimum integrity test
- Shock (SSD) :
  - Operating : MIL-STD-810G, Method 516.6, Procedure I, Functional shock=20g
  - Non-Operating : MIL-STD-810G, Method 516.6, Procedure V, crash hazard shock test=75g

### Standards/Certifications

- CE approval
- FCC Class A
- e13 Mark

## Ordering Information

### ♦ VTC 7110-D1K (P/N : 10V00711007X0)

Intel® Core™ i7 1.5GHz, Industrial Grade 2GB DDR3 SODIMM, LVDS/VGA Output, 1x RS-232, 1x RS-485/422 with isolation DI/DO, COM and 1x OBDII (SAEJ1939 or J1708)

### ♦ Optional Accessories

| Part No.      | Description   |
|---------------|---|
| 10VD0100000X0 | VMD 1000-B 7" monitor w/touch screen  |
| 10VD0100101X0 | VMD 1001-B 7" Monitor w/touch screen, VGA interface   |
| 10VD0200000X0 | VMD 2000-B 8" Monitor w/touch screen  |
| 10VD0200200X0 | VMD 2002-B 8" Monitor w/touch screen, cable integration   |
| 10VK0071F00X0 | VTK 71F, fan Kit  |
| 10VK0006013X0 | Wireless mini card kit, Ralink 802.11b/g/n 2T2R, QCOM : Q802XKN5F, w/antenna & cable (without assembly in NEXCOM)   |
| 10VK0WWAN01X0 | Cinterion PHS8-P kit, Five bands, UMTS/HSPA (850/800, 900, 1900 and 2100 MHz), Quad-Band GSM w/internal cable, antenna & packing (without assembly in NEXCOM) |
| 10VK00GPS00X0 | SKYTRAQ GPS + GLONASS, w/antenna & cable  |
| 10VK0006007X0 | Bluetooth kit, QCOM: QBTM400-01(V7), w/antenna & cable (without assembly in NEXCOM)   |
| 7400120002X00 | Power adapter FSP: 120-AAB (N09001), 120W 19V/6.3A  |
| 60233SAM03X00 | Internal cable for GSM/WLAN/GPS antenna connection MOQ: 20 pcs  |
| 60233SAM05X00 | GPS antenna/5m/SMA180P  |
| 60233SAM07X00 | GSM/ GPRS antenna, SMA, support 850, 900, 1800, 1900  |
| 60233SMA30X00 | GPS+GSM combo antenna 5M/SMA180P  |
| 60233SAM17X00 | GPRS/UMTS/HSDPA antenna, SMA, support 850, 900, 1800, 1900 and 2100 MHz   |
| 60233SAM07X00 | GSM/GPRS antenna, SMA, support 850, 900, 1800, 1900   |
| 60233SMA30X00 | GPS+GSM combo antenna 5M/SMA180P  |
| 60233SAM17X00 | GPRS/UMTS/HSDPA antenna, SMA, support 850, 900, 1800, 1900 and 2100 MHz   |