

## NVIDIA® QUADRO® PASCAL™ P3000, 3.9 TFLOPS WITH 4 VIDEO OUTPUTS

### KEY FEATURES

- NVIDIA P3000, 3.9 TFLOPS, GPGPU Engine
- 4 independent DisplayPort 1.4 outputs
- 6 GB GDDR5 memory
- PCIe x16 Gen3
- Operating power configurable hard cap: 40 – 75W

### ADDITIONAL FEATURES

- 4 DisplayPort 1.4 digital video outputs:
  - support for High Dynamic Range (HDR) video
  - 4K at 120Hz or 5K at 60Hz with 10-bit color depth
- Pascal GPGPU parallel processing:
  - 1280 CUDA® cores
  - CUDA Toolkit 9, CUDA Compute version 6.1
  - OpenCL™ 1.2, DirectX® 12, OpenGL 4.5
  - Vulkan 1.0
- Memory width: 192-bit width
- Maximum memory bandwidth: 168 GB/s
- NVENC/NVDEC accelerator for HEVC (H.265) and AVC (H.264) hardware encode/decode


### SPECIFICATIONS

- High level of ruggedization:
  - Rugged air-cooled or conduction-cooled
  - Operating temperature: -40° to +71°C
  - Vibration (sine wave): 5G peak, 5 - 2000Hz
  - Shock: 20G peak
- Front I/O and Rear I/O configurations
- Windows and Linux drivers
- Supported VPX configurations:
  - VPX-REDI (ANSI/VITA 48.x)
  - OpenVPX (ANSI/VITA 65)

### OVERVIEW

The VPX3U-P3000-VO board uses NVIDIA's advanced Quadro Pascal 16nm GPU technology. This rugged Pascal-based board includes four DisplayPort 1.4 outputs, which provides support for High Dynamic Range (HDR) video, and resolutions of 4K at 120Hz or 5K at 60Hz with 10-bit color depth.

The rugged VPX3U-P3000-VO board includes air-cooled and conduction cooled options. For additional options contact WOLF to discuss MCOTS and custom design services.

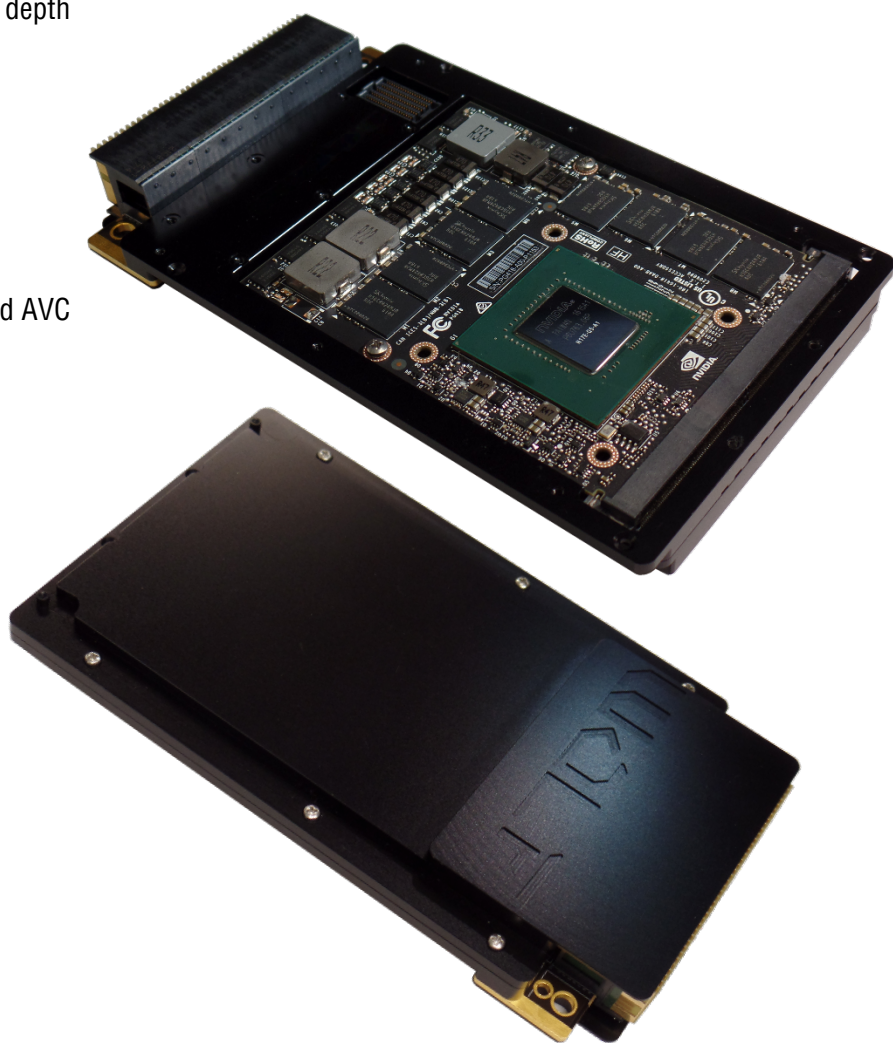


**WOLF- 1116 VPX Module**

## NVIDIA QUADRO PASCAL P3000

Quadro Pascal P3000 is an enormous leap in processing capability compared to the previous generation Maxwell M3000SE. It can provide up to 3.9 TFLOPS of CUDA processing at a very modest operating power, providing a huge improvement to 52 GFLOPS/Watt, making it an excellent choice for aerospace and defense applications.

Quadro Pascal architecture provides a more powerful Unified Memory feature. Pascal's larger virtual memory address space enable GPUs to access the entire system memory plus the memory of all GPUs in the system, while the on-demand page migration engine allows the system to migrate pages from anywhere in the system to the GPU's memory for processing. This improved memory handling results in significantly improved algorithm efficiency.

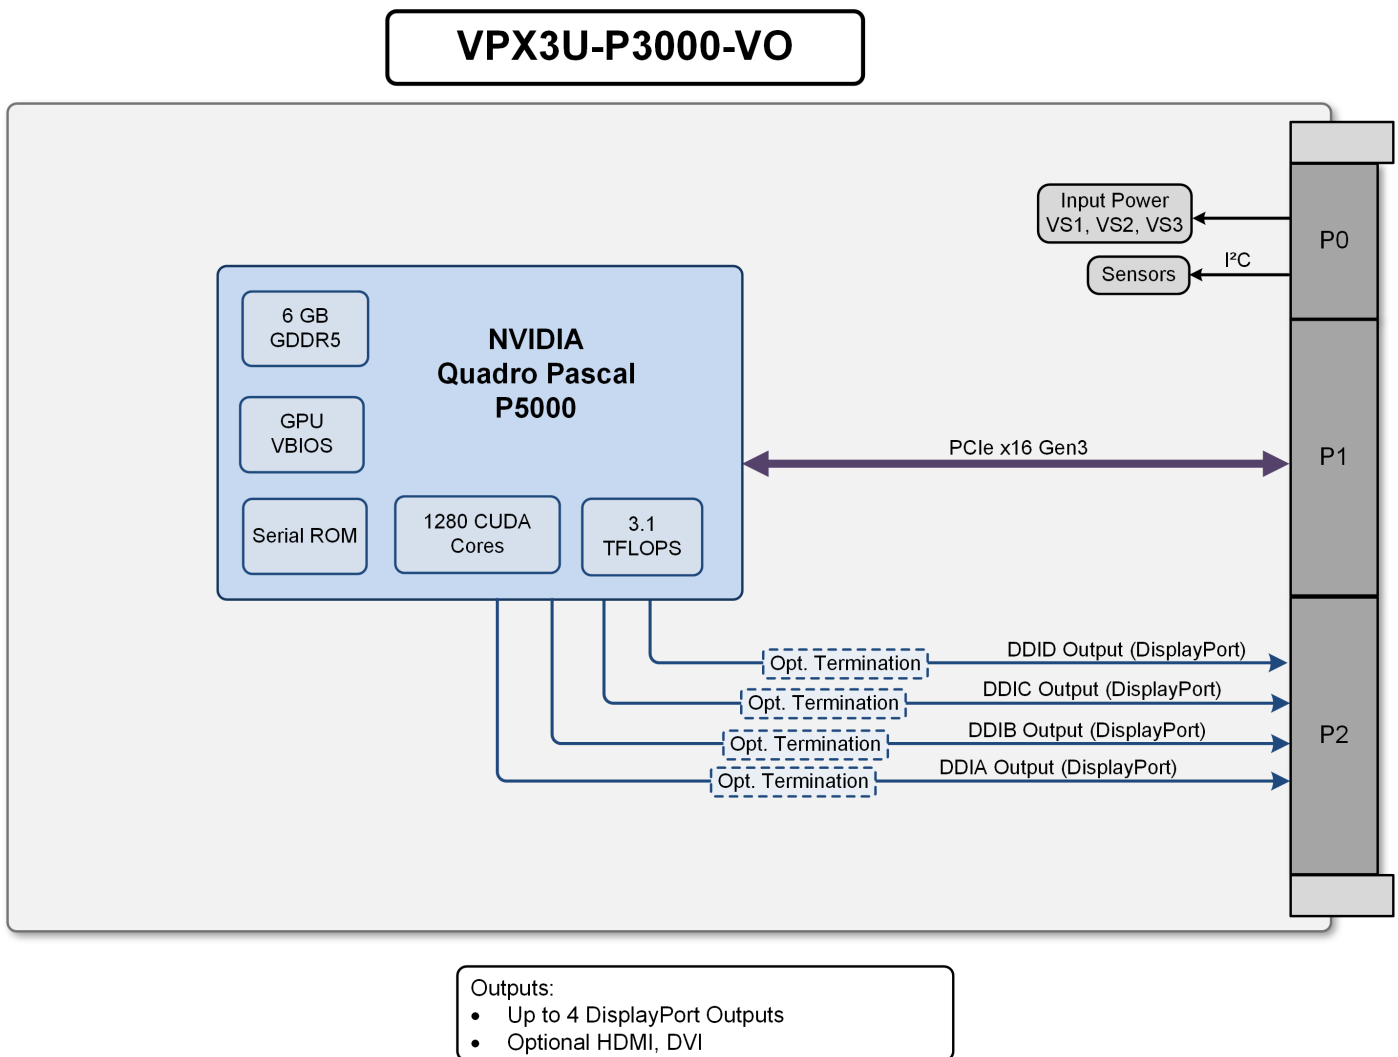

## ORDERING CODES FOR VPX3U-P3000-VO

Part Number	Description
111623-F30*VPX3v10	Air Cooled
111633-F30*VPX3v10	Conduction Cooled

\* Contact Sales for code definition. Code can specify:  
Conformal Coating, Modified Power Cap, other

## MANUFACTURING AND QUALITY ASSURANCE


WOLF stress tests to MIL-STD-810 (United States Military Standard for Environmental Engineering Considerations and Laboratory Tests) and MIL-HDBK-217 (Reliability Prediction of Electronic Equipment); Alternately will stress test to RTCA DO-160 (Environmental Conditions and Test Procedures for Airborne Equipment) on request.

WOLF products meet the following quality standards:

- ISO 9001:2015 (Quality management systems)
- IPC-A-610 CLASS 3 (Acceptability of Electronic Assemblies)
- IPC 6012 CLASS 3 (Qualification and Performance Specification for Rigid Printed Boards, Class 3 for High Reliability Electronic Products)
- IPC J-STD-001 Certified (Requirements for Soldered Electrical and Electronic Assemblies)

Boards are manufactured to meet the following standards:

- SAE AS9100D (Quality Management System - Requirements for Aviation, Space and Defense Organizations)
- SAE AS5553 (Counterfeit Electronic Parts; Avoidance, Detection, Mitigation, and Disposition)

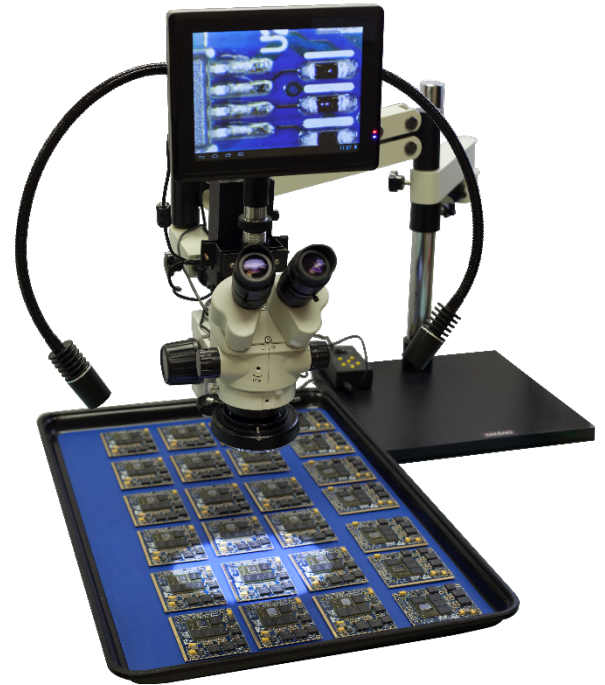

WOLF- 1116 VPX Module