


# COM EXPRESS TYPE 6 CARRIER BOARD ON MINI-ITX FORM FACTOR

## conga-IT6

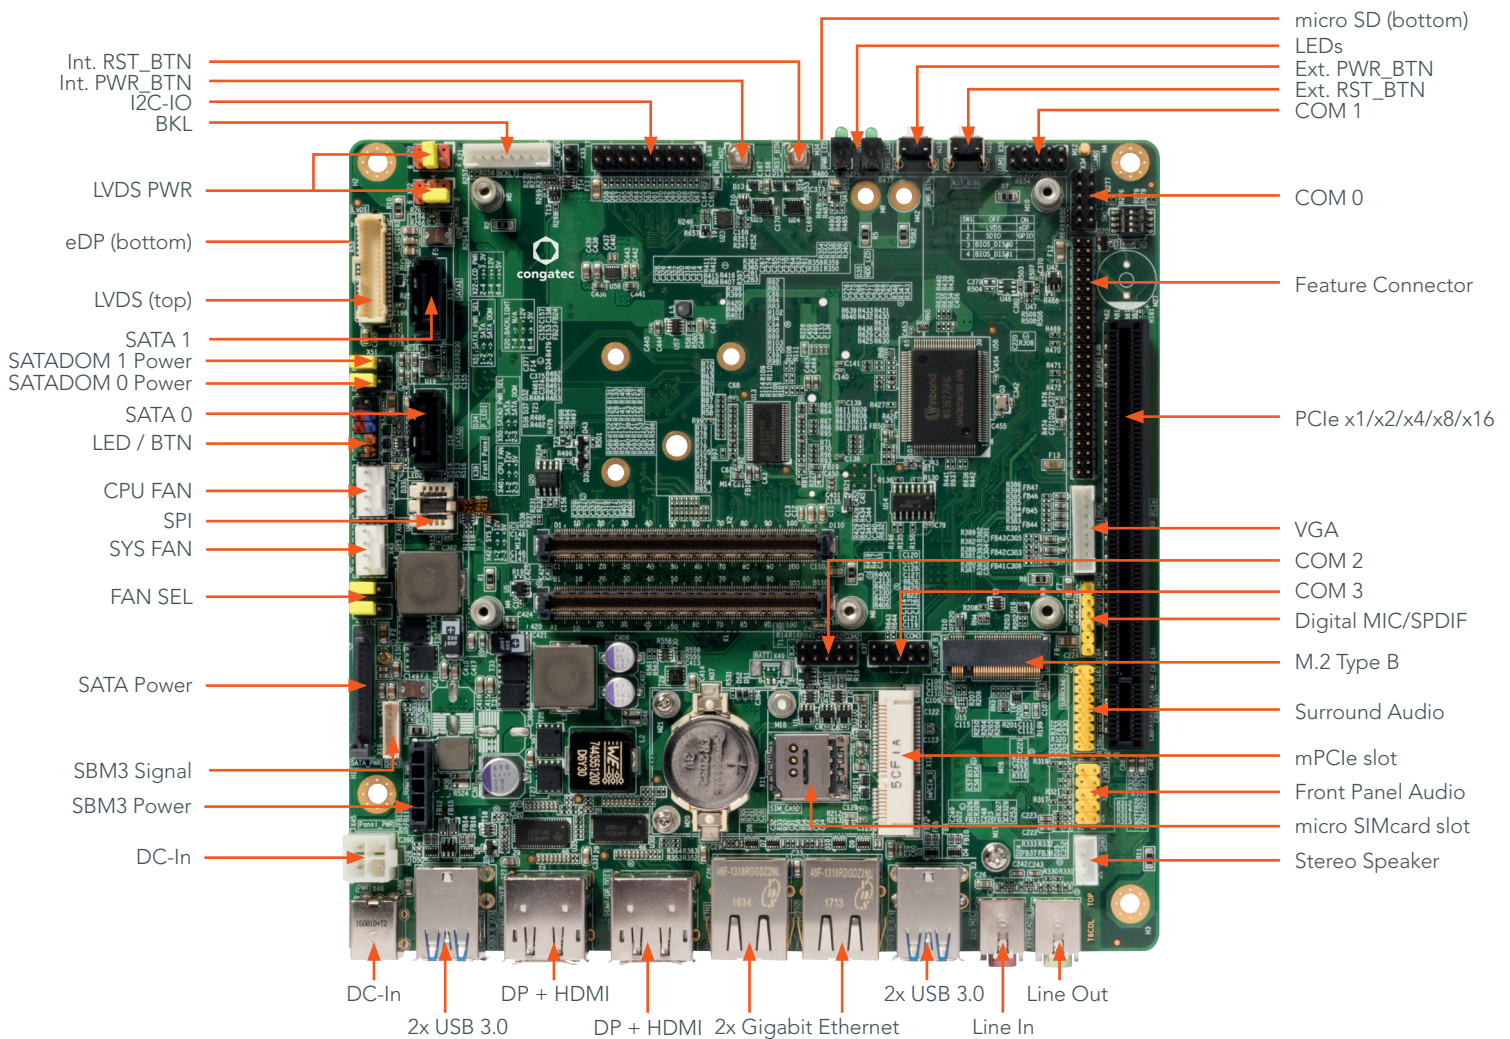

COMe Type 6 Carrier Board on Mini-ITX form factor.

Ethernet	2x GbE RJ45 (1x from COMe Type 6 module   1x Intel GbE Controller i211)
Internal connectors	1x Mini PCIe socket x1   1x M.2 socket   1x PCIe x1/x2/x4/x8/x16 slot   2x SATA Gen3   4X COM (232/422/485)   1x LPC header 1x I <sup>2</sup> C Bus   1x SM Bus   1x GPIO   2x FAN control   1x VGA   1x LVDS   eDP   1x microSD   1x micro SIM slot
External connectors	4x USB 3.0/2.0   2x DP + 2x HDMI   2x GbE   Line In / Line Out   DC-IN
Buttons	Power button   Reset button
Power Input	12V~24V DC input   ATX Power Supply
Temperature	Commercial: Operating: 0 .. +60°C   Storage: -40 .. +85°C
Humidity	Operating: 10 - 90% r. H. non cond.   Storage: 5 - 95% r. H. non cond.
Size	170 x 170 mm (6.7" x 6.7")

---

# conga-IT6 | Order Information

Article	PN	Description
conga-IT6	065830	Standard Mini-ITX carrier board for COM EXPRESS Type 6 Modules with basic and compact form factor.
conga-IT6 Carrier/IO Shield Standard	065840	IO Shield Standard Size for conga-IT6 Mini-ITX COM Express Carrier Board (height 40mm)   for Standart Mini-ITX Chassis