

Features

- 17" Industrial Compact Size Panel PC
- Intel 4th Gen. Core i3 CPU built-in/ i5(option)
- Onboard 4GB DDR3L 1600MHz/ 8GB(option)
- Flat Front Panel Touch Screen and Fanless Design
- DC 9~36V Wide Range Power Input
- IP66 Compliant Front Panel
- Optional Projected Capacitive Touch Screen Support 7H Anti-Scratch Surface

Specifications

System	
CPU	Onboard Intel 4th Gen. Core i3 CPU Processors / i5(option)
System Chipset	SoC
Memory	Onboard 4GB DDR3L 1600MHz/ 8GB(option)

I/O Port	
USB	2 x USB 3.0 type A
Serial / Parallel	1 x DB-9 RS-232/422/485, COM1 (Default RS-232) 1 x RS-232 DB-9, COM2
Audio	1 x Audio Line Out
LAN	2 x GbE LAN RJ-45
Power	1 x 3-pin DC power input terminal 1 x 2-pin connector for power on/off

Option	
	VESA Stand
	4G LTE/Wi-Fi/BT
	4 x USB 2.0 type A (TB-528U4)
	4 x USB 2.0 type A/ 1 x Mini PCIe/ 1 x SIM slot (TB-528U4ME1)
	1 x COM/ 2 x USB 2.0 (TB-528C1U2)
	1 x COM (RS-232) + 2 x USB 2.0 + 1 x Power Button (TB-528C1U2P1)
	2 x COM (TB-528C2)
	2 x COM/ 1 x Mini-Pcie slot/ 1 x SIM slot (TB-528C2ME1)
	2 x COM (RS-232/485, isolated) (TB-528C2I)
	2 x CAN (TB-528CAN2)
	1 x LAN/ 2 x USB 2.0 (TB-528E1U2)
	UPS Battery 21W/10.8Wh/1.95Ah(3S1P)


Storage Space	
HDD	1 x 2.5" SATA HDD bay for SATA HDD (Easy Accessible)

Expansion	
Expansion Slot	1 x Internal Mini-PCIe slot full size 1 x SIM card holder / Micro SD card reader

Display	
Display Type	17" TFT-LCD
Max. Resolution	1280 x 1024
Max. Color	16.2M
Luminance (cd/m ²)	350
View Angle	170(H) / 160(V)
Contrast	1000:1
Backlight Lifetime	30,000 hrs

Touch Screen	
Type	Resistive Touch (for R Model) Projected Capacitive Touch (for P Model)
Interface	USB
Light Transmission(%)	Resistive Touch Window: over 80% Projected Capacitive Touch: over 90%

Dimensions

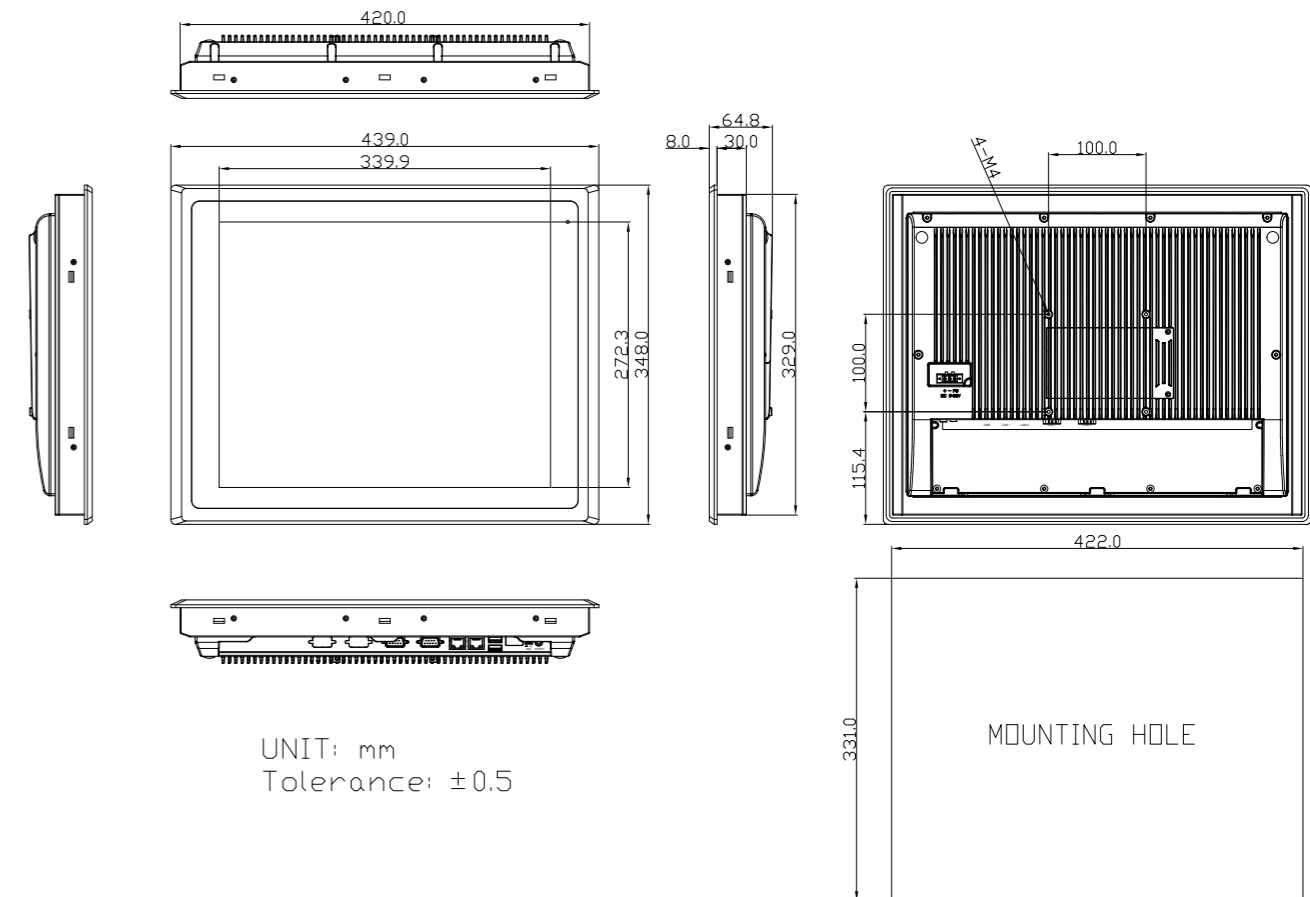

UNIT: mm
Tolerance: ±0.5

Power	
Power Input	DC 9~36V
Power Consumption	ARCHMI-917P: 30W (MAX)

Mechanical	
Color	RAL 9007
Construction	Aluminum die-casting chassis
Mounting	Panel Mount, VESA 100 x 100
Dimensions (WxHxD)	439mm x 348mm x 64.8mm
IP Rating	IP66 Compliant Front Bezel
Net Weight	6.1 kg

Environmental	
Operating Temperature	0~50°C
Storage Temperature	-30~70°C
Humidity	10 to 95%@ 40°C, non-condensing
Certificate	CE/FCC Class A/CB/UL

Operating System Support	
Windows 10 IoT	

Ordering Information	
ARCHMI-917	17" SXGA Fanless HMI barebone with Intel Core i3-4010 CPU, 4GB DDR3 RAM, Resistive touch screen, 9~36V DC input with adapter, Aluminum chassis
ARCHMI-917P	17" SXGA Fanless HMI barebone with Intel Core i3-4010 CPU, 4GB DDR3 RAM, Projected Capacitive touch, 9~36V DC input with adapter, Aluminum chassis