



# TPS-3162GT-M12-BP1-24V

EN50155 18-port managed PoE Ethernet switch with 16x10/100Base-T(X) P.S.E. and 2x10/100/1000Base-T(X), A-coded M12 connector and 1xbypass included, 24VDC power

inputs



## Features

- Leading EN50155-compliant Ethernet switch for rolling stock application
- 16 ports P.S.E. fully compliant with IEEE802.3af standard, provide up to 15.4 Watts per port
- World's fastest Redundant Ethernet Ring: **O-Ring** (recovery time < 10ms over 250 units of connection)
- **O-Chain** support applications with multiple redundant rings topology
- Support standard IEC 62439-2 **MRP**<sup>\*NOTE</sup> (Media Redundancy Protocol) function
- STP/RSTP/MSTP supported
- Support **PTP Client** (Precision Time Protocol) clock synchronization
- Support Modbus TCP protocol
- IGMP v2/v3 (IGMP snooping support) for filtering multicast traffic
- SNMP v1/v2c/v3 support for secured network management
- RMON for traffic monitoring
- Support VLAN and LLDP protocol
- DHCP assign each Equipment IP by each Port
- Provided Relay bypass function with two gigabit ports
- Event notification through Syslog, Email, SNMP trap, and Relay Output
- Windows utility (**Open-Vision**) support centralized management and configurable by Web-based, Telnet, and Console (CLI)
- M12 connectors to guarantee reliable operation against environmental disturbances
- Wall mounting enabled



## Introduction

ORing's Transporter™ series managed Ethernet switches are designed for industrial applications, such as rolling stock, vehicle, and railway applications. The TPS-3162GT-M12-BP1-24V is a managed PoE Redundant Ring Ethernet switch with 16x10/100Base-T(X) P.S.E. and 2x10/100/1000Base-T(X) ports which is specifically designed for the toughest and fully compliant with EN50155 requirement. With completely support of Ethernet Redundancy protocol, O-Ring (recovery time < 10ms over 250 units of connection), O-Chain and MSTP/RSTP/STP (IEEE 802.1s/w/D) can protect your mission-critical applications from network interruptions or temporary malfunctions with its fast recovery technology. And O-Chain technology is supported which can applied for multiple redundant Ethernet rings. TPS-3162GT-M12-BP1-24V also supports Power over Ethernet, a system to transmit electrical power, along with data, to remote devices over standard twisted-pair cable in an Ethernet network. Each TPS-3162GT-M12-BP1-24V switch has 16X10/100Base-T(X) P.S.E. (Power Sourcing Equipment) ports. P.S.E. is a device (switch or hub for instance) that will provide power in a PoE setup. TPS-3162GT-M12-BP1-24V EN50155 Ethernet switch use M12 connectors to ensure tight, robust connections, and


**\*NOTE: This function is available by request only.**

guarantee reliable operation against environmental disturbances, such as vibration and shock.


TPS-3162GT-M12-BP1-24V can be managed centralized and convenient by a powerful windows utility ~ Open-Vision. In addition, the wide operating temperature range from -40°C to 70°C can satisfy most of operating environment. Therefore, the switch is one of the most reliable choices for rolling stock and highly-managed PoE Ethernet application.

## Open-Vision


ORing's switches are intelligent switches. Different from other traditional redundant switches, ORing provides a set of Windows utility (Open-Vision) for user to manage and monitor all of industrial Ethernet switches on the industrial network.

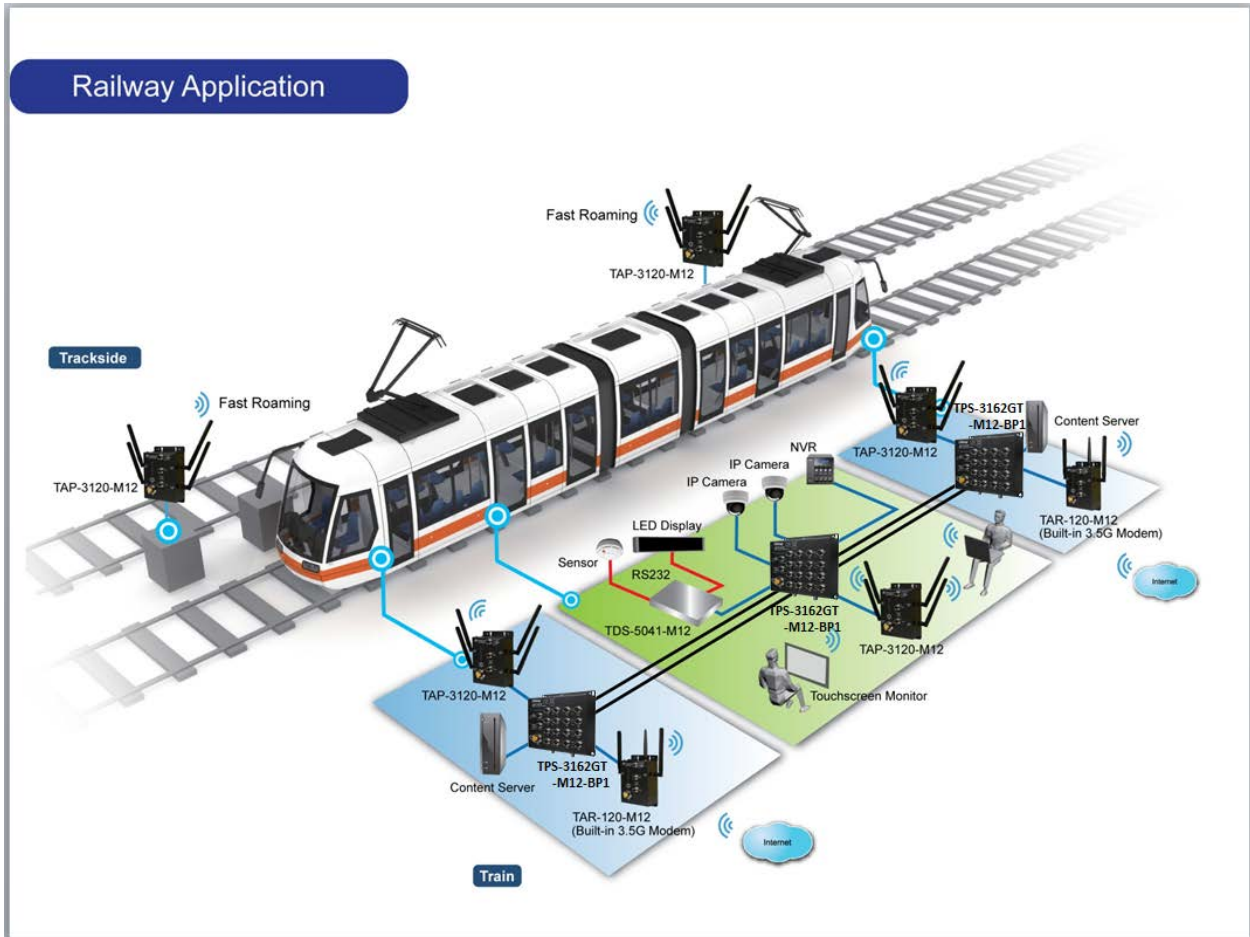

Network connection

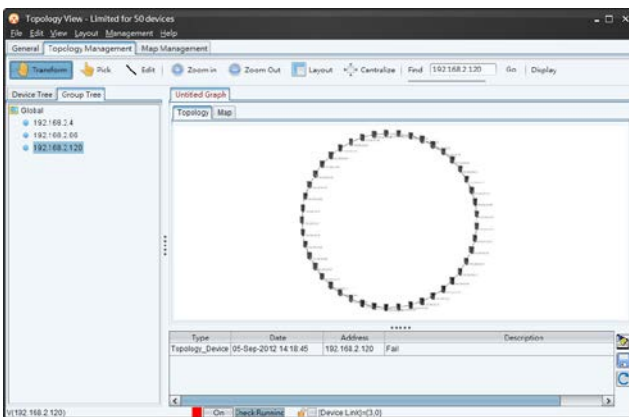


Topology View


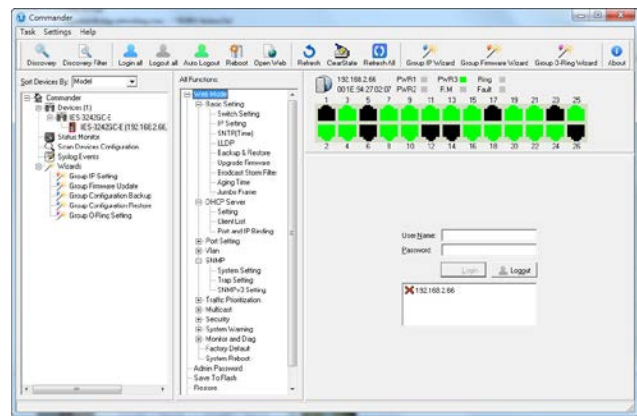


Monitoring and Configuration interface

## Dimension

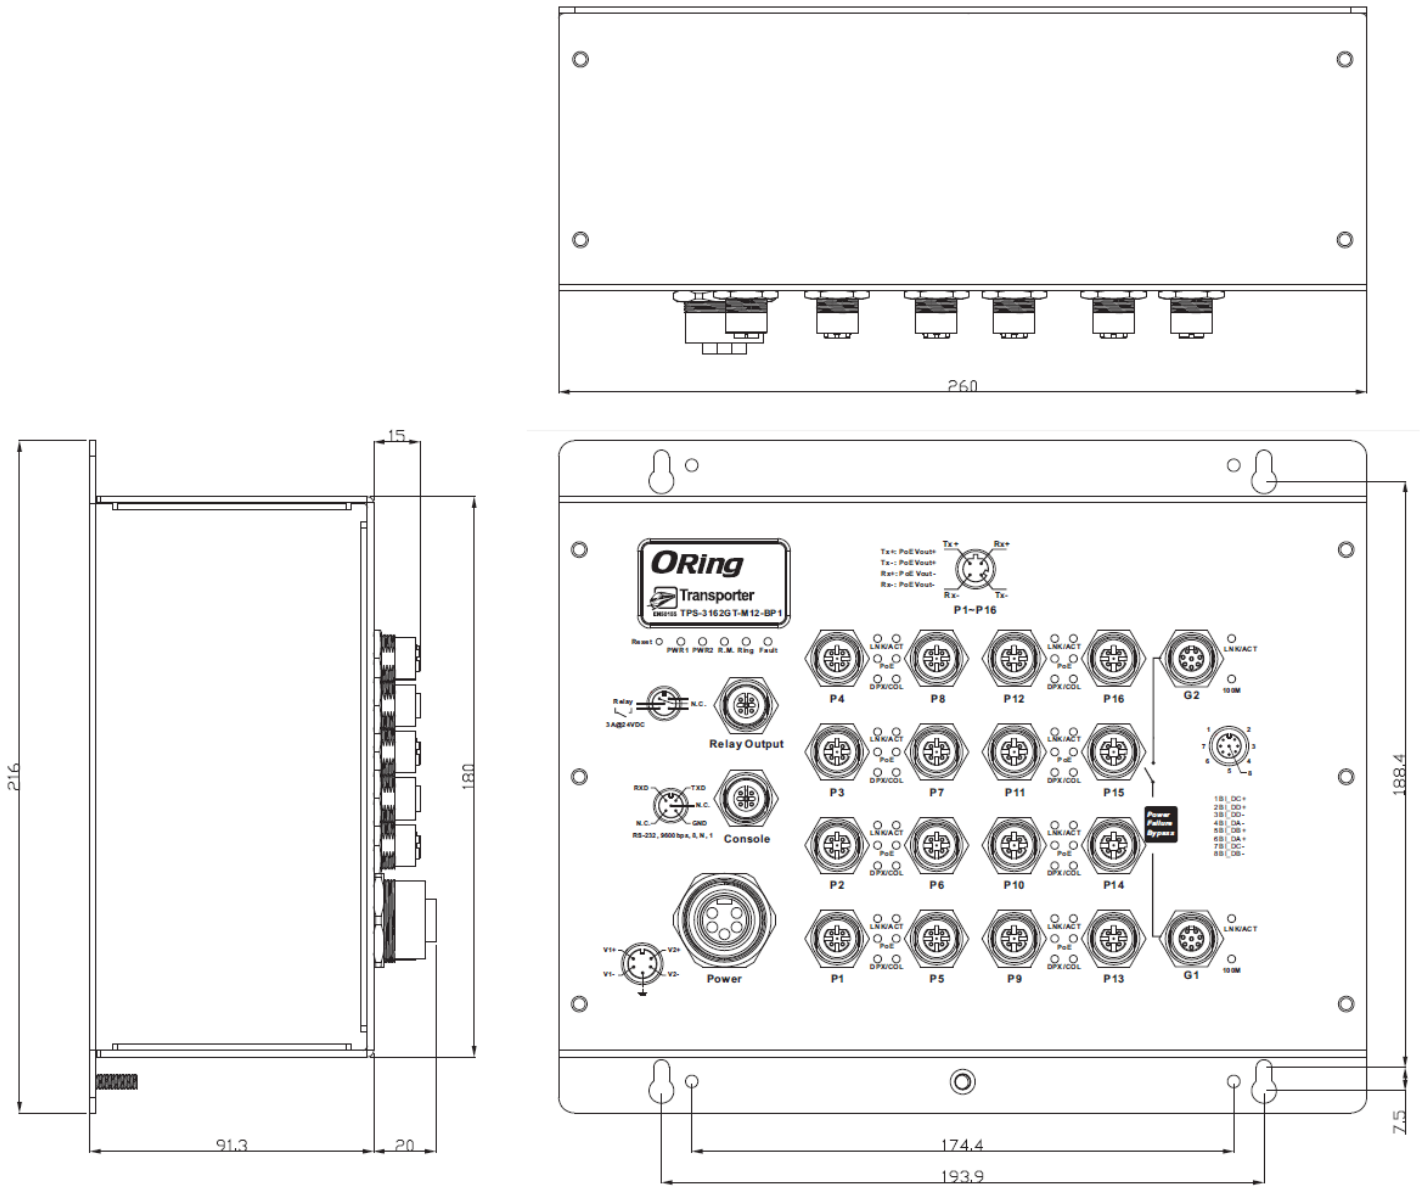


## Pin Definition


 D-Coding M12	10/100Base-T(X) P.S.E. M12 port		 A-Coding M12	10/100/1000Base-T(X) M12 port	
	Pin No.	Description		Pin No.	Description
	#1	Tx+ with PoE Vout+		#1	BI_DC+
	#2	Rx+ with PoE Vout-		#2	BI_DD+
	#3	Tx- with PoE Vout+		#3	BI_DD-
	#4	Rx- with PoE Vout-		#4	BI_DA-
	#5	N.C.		#5	BI_DB+

	#6	N.C.		#6	BI_DA+
	#7	N.C.		#7	BI_DC-
	#8	N.C.		#8	BI_DB-

## PoE Power Distribution

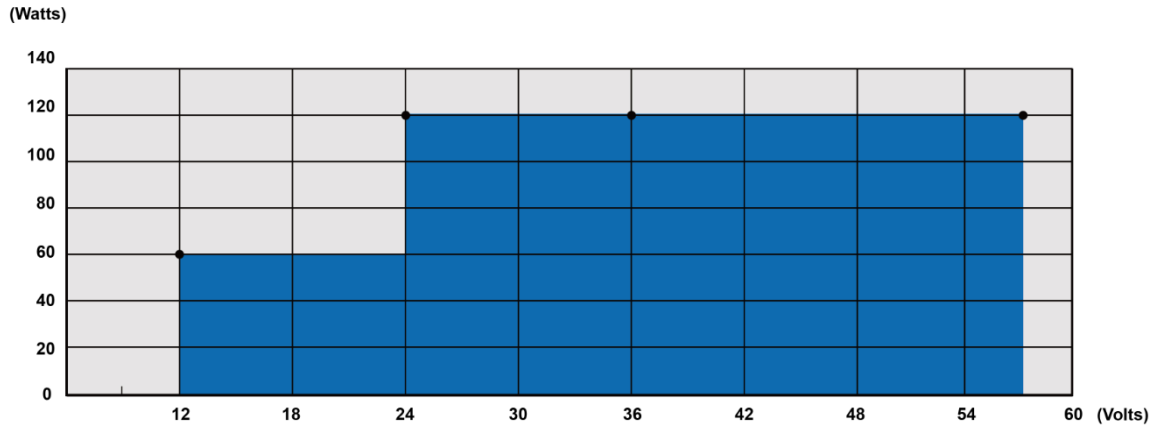

P1~P8 / P9~P16 PoE Power Distribution (respectively)

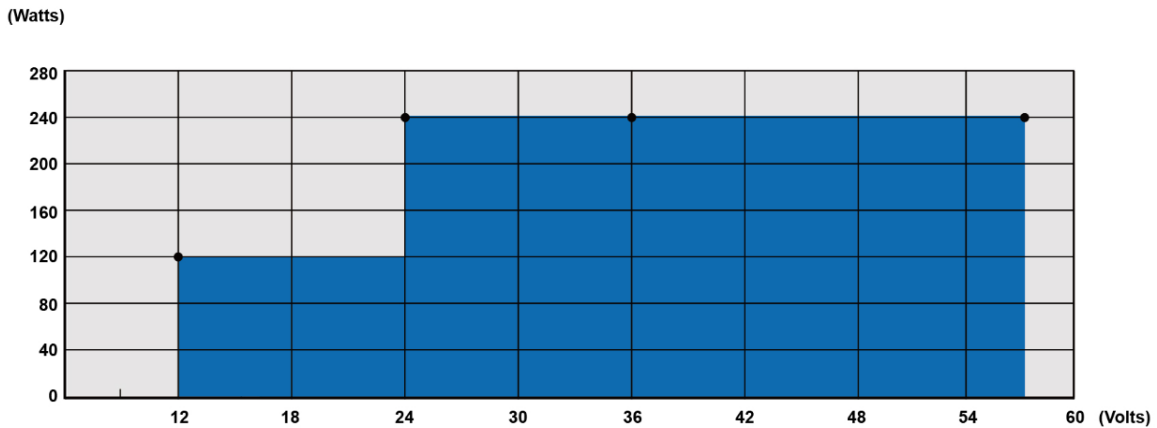

Total PoE Power Distribution

## Specifications

<b>ORing Switch Model</b>	TPS-3162GT-M12-BP1-24V
<b>Physical Ports</b>	
10/100Base-T(X) Ports in M12 Auto MDI/MDIX with P.S.E.	16 x M12 female connector (4-pin D-coding)
10/100/1000Base-T(X) ports in M12	2 x M12 female connector (8-pin A-coding)
RS-232 Serial Console Port	RS-232 in M12 female connector (A-coding). Baud rate setting: 9600bps, 8, N, 1
<b>Technology</b>	
Ethernet Standards	IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX IEEE 802.3ab for 1000Base-T


	<p>IEEE 802.3x for Flow control</p> <p>IEEE 802.3ad for LACP (Link Aggregation Control Protocol)</p> <p>IEEE 802.1D for STP (Spanning Tree Protocol)</p> <p>IEEE 802.1p for COS (Class of Service)</p> <p>IEEE 802.1Q for VLAN Tagging</p> <p>IEEE 802.1w for RSTP (Rapid Spanning Tree Protocol)</p> <p>IEEE 802.1s for MSTP (Multiple Spanning Tree Protocol)</p> <p>IEEE 802.1x for Authentication</p> <p>IEEE 802.1AB for LLDP (Link Layer Discovery Protocol)</p> <p>IEEE 802.3af PoE specification (up to 15.4 Watts per port for P.S.E.)</p>
MAC Table	8192 MAC addresses
Priority Queues	4
Processing	Store-and-Forward
Switch Properties	<p>Switching latency: 7 us</p> <p>Switching bandwidth: 7.2Gbps</p> <p>Max. Number of Available VLANs: 4096</p> <p>IGMP multicast groups: 1024</p> <p>Port rate limiting: User Define</p>
Security Features	<p>Enable/disable ports, MAC based port security</p> <p>Port based network access control (802.1x)</p> <p>VLAN (802.1Q) to segregate and secure network traffic</p> <p>Supports Q-in-Q VLAN for performance &amp; security to expand the VLAN space</p> <p>Radius centralized password management</p> <p>SNMP v1/v2c/v3 encrypted authentication and access security</p>
Software Features	<p>STP/RSTP/MSTP (IEEE 802.1D/w/s)</p> <p>Redundant Ring (O-Ring) with recovery time less than 10ms over 250 units</p> <p>TOS/Diffserv supported</p> <p>Quality of Service (802.1p) for real-time traffic</p> <p>VLAN (802.1Q) with VLAN tagging and GVRP supported</p> <p>IGMP Snooping for multicast filtering</p> <p>Port configuration, status, statistics, monitoring, security</p> <p>SNTP for synchronizing of clocks over network</p> <p>Support <b>PTP Client</b> (Precision Time Protocol) clock synchronization</p> <p>DHCP Server / Client support</p> <p>Port Trunk support</p> <p>MVR (Multicast VLAN Registration) support</p> <p>Modbus TCP</p>
Network Redundancy	<p>O-Ring</p> <p>O-Chain</p> <p>MRP*<b>NOTE</b></p> <p>STP</p> <p>RSTP</p> <p>MSTP</p>
Warning / Monitoring System	<p>Relay output for fault event alarming</p> <p>Syslog server / client to record and view events</p> <p>Include SMTP for event warning notification via email</p> <p>Event selection support</p>
<b>LED Indicators</b>	
Power Indicator	Green: Power LED x 2
R.M. Indicator	Green: Indicate system operated in O-Ring Master mode
O-Ring Indicator	Green: Indicate system operated in O-Ring mode
Fault Indicator	Amber: Indicate unexpected event occurred
10/100Base-T(X) M12 PoE Port Indicator	Top Green for port Link/Act. Middle Green for PoE indicator. Bottom Amber for Collision/Duplex indicator.
10/100/1000Base-T(X) M12 Port Indicator	Green for Link/Act. Amber for 100Mbps indicator
<b>Fault contact</b>	
Relay	Relay output to carry capacity of 3A at 24VDC on M12 female connector (5-pin A-coding)
<b>Power</b>	
Redundant Input Power	Dual DC inputs. 24 (12-57VDC) VDC on 5-pin M23 female connector
Power Consumption (Typ.)	14.88 Watts (power consumption of P.S.E. is not included)
PoE Output Power	120 Watts (12-24VDC) / 240 Watts (24-57VDC)

Overload Current Protection	Present
Reverse Polarity Protection	Not Present
<b>Physical Characteristic</b>	
Enclosure	IP-30
Dimension (W x D x H)	260 (W) x 91.3 (D) x216 (H) mm
Weight (g)	2220 g
<b>Environmental</b>	
Storage Temperature	-40 to 85°C (-40 to 185°F)
Operating Temperature	-40 to 70°C (-40 to 158°F)
Operating Humidity	5% to 95% Non-condensing
<b>Regulatory approvals</b>	
EMC	CE EMC (EN 55024, EN 55032), FCC Part 15 B, EN 50155(pending)
EMI	EN 55032, CISPR32, EN 61000-3-2, EN 61000-3-3, FCC Part 15 B class A
EMS	EN 55024 (IEC/EN 61000-4-2 (ESD), IEC/EN 61000-4-3 (RS), IEC/EN 61000-4-4 (EFT), IEC/EN 61000-4-5 (Surge), IEC/EN 61000-4-6 (CS), IEC/EN 61000-4-8(PFMF), IEC/EN 61000-4-11 (DIP))
Shock	IEC60068-2-27
Free Fall	IEC60068-2-31
Vibration	IEC60068-2-6
Safety	EN60950-1
Other	EN 50155(IEC 61373) (pending)
MTBF	267612 hrs.
Warranty	5 years

**\*NOTE: This function is available by request only.**

## Ordering Information

TPS-3**AA****BCC**-M12-**DDD**-24V

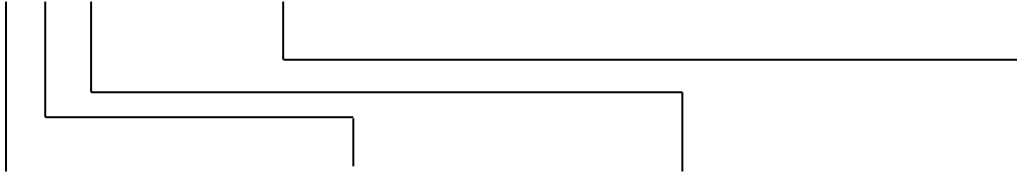

Code Definition	10/100Base-T(X) Port Number	P.S.E.	Additional Port Number	Additional Port Type	Bypass Function
<b>Option</b>	- 16: 16 ports		- 2: 2 ports	- <b>GT</b> : 10/100/1000Base-T(X) port	- <b>BP1</b> : 1xbypass function included

Available Model	Model Name	Description
	<b>TPS-3162GT-M12-BP1-24V</b>	EN50155 18-port managed PoE Ethernet switch with 16x10/100Base-T(X) P.S.E. and 2x10/100/1000Base-T(X), A-coded M12 connector and 1xbypass included, 24VDC power inputs

## Packing List

- TPS-3162GT-M12-BP1-24V x
- ORing Tool CD x 1
- Quick Installation Guide x 1

## **Optional Accessories**

---

- **Open-Vision M500: Powerful Network Management Windows utility Suit, 500 IP devices**
- **M12C: M12 cable accessories**