




# IMB-1215

## Mini-ITX Motherboard

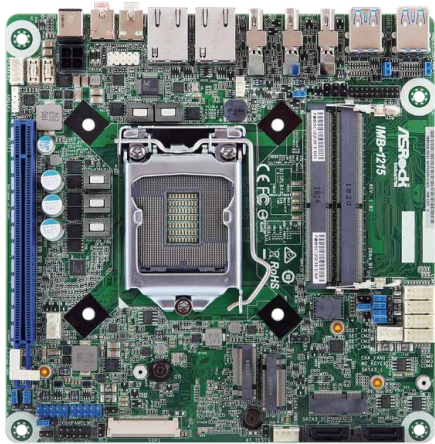

### KEY FEATURES

- Intel® 9<sup>th</sup>/ 8<sup>th</sup> Gen (Coffee Lake-S) Core™ Processors with Q370 chipset
- 2 x 260-pin SO-DIMM up to 64GB\* DDR4 2666MHz
- 1 x PCIe x16 (Gen3), 4 x USB 3.1 Gen1, 4 x USB 2.0, 1 x M.2 Key E, 2 x M.2 Key M, 4 x COM, 2 x SATA3
- 1 x Intel 1 Gigabit LAN, 1 x Realtek 1 Gigabit LAN
- Supports triple display, 3 x DP 1.2, 1 x eDP
- TPM 2.0 onboard IC
- Supports Intel® vPro, AMT, RAID 0/1
- 19V DC-In

### SPECIFICATIONS

#### Form Factor

Dimensions	Mini-ITX (6.7-in x 6.7-in)
------------	----------------------------

#### Processor System

CPU	Intel® 9 <sup>th</sup> / 8 <sup>th</sup> Gen (Coffee Lake-S) Core™ Processors, up to 65W *The Performance of CPUs over 65W will be limited due to power design.
Chipset	Intel® Q370
Socket	LGA1151
BIOS	AMI SPI 128 Mbit

#### Memory

Technology	Dual Channel DDR4 2666 MHz
Capacity	64GB* * Intel Core i9/i7/i5 CPUs support up to 64GB (32GB per DIMM) Intel Core i3/Pentium/Celeron CPUs support up to 32GB (16GB per DIMM)
Socket	2 x 260-pin SO-DIMM

#### Graphics

Controller	Coffee Lake integrated graphics
HDMI	N/A
DisplayPort	DisplayPort 1.2, DP++ Max resolution up to 4096x2304@60Hz
VGA	N/A
LVDS	N/A
eDP	eDP 1.4 Max resolution up to 4096x2304@60Hz
DVI	N/A
MultiDisplay	Triple Display

#### Expansion Slot

PCIe	1 x PCIe x16 (Gen3, Support riser card x8/x8, x8/x4/x4)
PCI	N/A
mini-PCIe	N/A
M.2	1 x M.2 (Key E, 2230) with PCIe x1, USB 2.0 and CNVi for Wireless
SIM Socket	N/A

#### Audio

Interface	Realtek ALC887/897, High Definition Audio. Line-out, Mic-in
-----------	---

#### Ethernet

Controller/ Speed	LAN1: 1 x Intel® I219LM with 10/100/1000 Mbps, supports AMT/vPro LAN2: 1 x Realtek RTL8111G/RTL8111H-CG with 10/100/1000 Mbps
Connector	2 x RJ-45

#### Rear I/O

HDMI	N/A
DisplayPort	3 x DP 1.2
VGA	N/A
DVI	N/A
Ethernet	2 x 1 Gigabit LAN
USB	4 x USB 3.1 (Gen1)
Audio	2 (Mic-in, Line-out)
COM	N/A
PS2	N/A

#### Internal Connector

USB	4 x USB 2.0 (2 x 2.54 pitch header)
COM	COM3(RS232/422/485) COM1, 2, 4(RS232)
Parallel	N/A
GPIO	N/A
TPM	TPM 2.0 onboard IC
LVDS	N/A
eDP	1
VGA	N/A
SATA PWR Output	1
Speaker Header	1

#### Storage

M.2	1 x M.2 (Key M, 2242/2260) with PCIe x1 for SSD 1 x M.2 (Key M, 2242/2280) with PCIe x4 and SATA3 for SSD
mSATA	N/A
SATA	2 x SATA3 (6Gb/s)
RAID	Intel® SATA RAID 0/1
eMMC	N/A

#### Watchdog Timer

Output	From Super I/O to drag RESETCON#
Interval	256 Segments, 0, 1, 2, ...255sec

#### Power Requirements

Input PWR	19V DC-In with 4-pin plug PWR cable or DC Jack
Power On	AT/ATX Supported - AT : Directly PWR on as power input ready - ATX : Press button to PWR on after power input ready

#### Environment

Operating Temp	0°C ~ 60°C
Storage Temp	-40°C ~ 85°C
Operating Humidity	5% ~ 90%
Storage Humidity	5% ~ 90%