





# IMB-150D-PCI

## Mini-ITX Motherboard

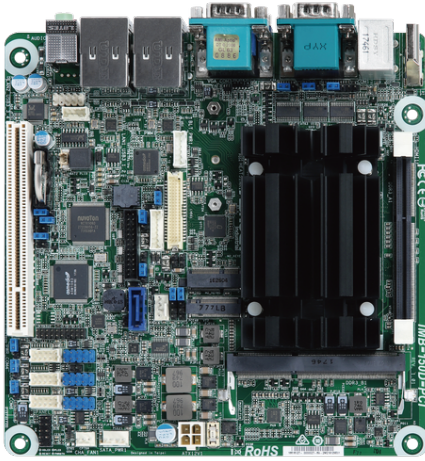

### KEY FEATURES

- Intel® Baytrail® Processor J1900
- Supports Dual Channel DDR3L SO-DIMM 1333MHz, up to 8GB
- 1 x HDMI, 1 x VGA, 1 x LVDS
- 4 x USB 3.0, 6 x USB 2.0, 2 x SATA2
- 1 x PCI, 1 x M.2 Key E, 1 x M.2 Key M
- 2 x Realtek LAN
- 1 x TPM Header
- 9-19V DC-In

### SPECIFICATIONS

#### Form Factor

Dimensions	Mini-ITX (6.7-in x 6.7-in)
------------	----------------------------

#### Processor System

CPU	Intel® Baytrail® Processor J1900
Chipset	SOC

#### Memory

Technology	Dual Channel DDR3L 1333 MHz
Max	8GB
Socket	2 x SO-DIMM

#### Graphics

Controller	Intel® Gen7 Intel Graphics DX 11*, OGL3.2
VGA	Supports max resolution up to 1920 x 1200@60Hz
LVDS	Supports max resolution up to 1920 x 1200@60Hz
eDP	N/A
HDMI	Supports max resolution up to 1920 x 1200@60Hz
DVI	N/A
DisplayPort	N/A
Multi Display	Dual Display

#### Expansion Slot

PCI	1
Mini-PCIe	N/A
M.2	1xM.2(KeyE,2230)with PCIe1 and shared USB for wireless
mSATA	N/A

#### Ethernet

Interface	10/100/1000 Mbps
Controller	2 x Realtek RTL8111G-CG/RTL8111H-CG

#### Rear I/O

VGA	1
DVI	N/A
HDMI	1
DisplayPort	N/A
Ethernet	2
USB	4 x USB 3.0
Audio Jack	2 (Mic-in, Line-out)
Serial	3 x RS-232/422/485
PS/2	2

#### Internal Connector

USB	6 x USB 2.0
LVDS	1
eDP	N/A
VGA	N/A
Serial	3 x RS-232
SATA	1 x SATA2
Parallel	1
GPIO	4 x GPI + 4 x GPO
SATA PWR Output Con	1
Speaker Header	1
TPM	1 x Header

#### Storage

M.2	1xM.2(keyM,2242 /2260/2280)with SATA2 for SSD
SATA	1 x SATA2

#### Watchdog Timer

Output	From Super I/O to drag RESETCON#
Interval	256 segments, 0,1,2...255sec

#### Power Requirements

Input PWR	9-19V DC-In
Power On	AT/ATX Supported AT : Directly PWR on as Power input ready ATX: Press Button to PWR on after Power input ready

#### Environment

Operating Temperature	0°C – 60°C
Storage Temperature	-40°C – 85°C