

# Varistar CP LHX+ Cabinet with 5 and 10 kW Air/Water Heat Exchanger

FOR HIGH-PRECISION TESTING AND MEASUREMENT

## NVENT SCHROFF VARISTAR CP LHX+ WITH 5 OR 10 KW AIR/WATER HEAT EXCHANGER

The Varistar CP LHX+ electronic cabinet including air/water heat exchanger with 5 kW or 10 kW cooling capacity is well-suited for applications where a fully sealed cabinet is required.



Cooling capacity from 5 kW up to 10 kW



Remote monitoring and control



Temperature regulation of +/- 0.1 K



Static load of 1,000 kg



EMC protection



Protection class IP 55

## ADVANTAGES AND FEATURES

- Scalable:**  
 By exchanging the 5 kW heat exchanger for a 10 kW heat exchanger, the cooling capacity can be adapted. The infrastructure in the cabinet remains unchanged.
- Future-oriented:**  
 When the number of complex electronics in the cabinet increases and the power density along with it, only the heat exchanger must be replaced to achieve higher cooling performance.
- Hot-swap applicable:**  
 The fan cassettes can be replaced without tools during operation.
- Space-saving:**  
 Available starting at 600 mm x 800 mm (W x D) base area per cabinet.
- Precision control:**  
 Controller with precise temperature regulation accuracy of +/- 0.1 K.
- Greater productivity, higher safety:**  
 Configuration and monitoring of the cooling unit via display on the front door. Remote control via Ethernet interface also possible.



## ORDER INFORMATION

### Complete Cabinet incl. LHX

	DESCRIPTION	MODEL NUMBER
Complete solution • IP55, EMC enclosure • 5-10 KW Heat exchanger • Intelligent remote controller	Varistar CP LHX+ cabinet, 5 kW, IP 55, 2000 H (2100 H with plinth) 600 W 800 D	10630-051
	Varistar CP LHX+ cabinet, 5 kW, IP55, EMC, 2000 H (2100 H with plinth) 600 W 1000 D	10630-052
	Varistar CP LHX+ cabinet, 10 kW, IP55, EMC, 2000 H (2100 H with plinth) 600 W 1000 D	10630-053

### Heat Exchangers

	DESCRIPTION	ITEM NUMBER		
		230 V VARIABLE SPEED FANS	115 V VARIABLE SPEED FANS	115 V FIXED SPEED FANS
5KW / 10KW Heat Exchangers	10 kW heat exchanger with two fans	29714-016	29714-022	29714-033
	5 kW heat exchanger with one fan	29714-017	29714-027	29714-036

### Spare Parts

	DESCRIPTION	ITEM NUMBER
Measurement – Control components	Controller	23130-668
	Display and accessories for LHX+	23130-666
	Door contact switch kit	26630-162

### Accessories

	DESCRIPTION	ITEM NUMBER
Flow Rate and Water Accessories	Flow rate and water T° sensor kit	23130-663
	LHX+ water hoses connection kit 1.5 m	23130-660
	LHX+ water hoses connection kit 4 m	23130-661
	Water hoses duct for rear panel	23130-662
	Venting kit for heat exchanger if a heat exchanger was ordered as a spare part	26630-178

	DESCRIPTION	ITEM NUMBER
Parts to be ordered to retrofit solution in any non SCHROFF 19" enclosure.	Heat exchanger (based on project requirement)	29714-016   29714-022   29714-033 29714-017   29714-027   29714-036
	Controller	23130-664
	Flow rate and water T° sensor kit	23130-663
	Hose and fittings for water	23130-665
	LHX+ water hoses connection kit 1.5 m / 4m	23130-660 or 23130-661

PS: Separating panels to separate hot zone (from door to 19" slide mount) and cold zone (from 19" slide mount rear panel) need to be created by the customer. Not delivered by SCHROFF

	DESCRIPTION	ITEM NUMBER
Additional replacement parts available for purchase	Actuator and Ball Valve	23130-669
	Fan Tray LHX+ 5 kW	29714-026
	Fan Tray LHX+ 10 kW	29714-025

# NVENT SCHROFF VARISTAR CP LHX+ CABINET WITH 5 AND 10 KW AIR/WATER HEAT EXCHANGER

## MONITORING

### Controller:

- Separate compact 19" control unit (2 U, with 1 U space usage) in the upper cabinet area
- Clearly marked plug & play sensor connections

### Sensors:

- Temperature regulation accuracy of +/- 0.1 K
- Differential pressure sensor for fan speed control as standard
- Optional coolant flow and temperature monitoring

### Access:


- Terminal with display and keyboard on front door for control without opening the door
- Ethernet interface for access to the cooling unit via web interface, SNMP, Modbus TCP
- Serial interface (RS485) for Modbus RTU
- Communication with guardian gateway management solution possible



## CABINET SPECIFICATION

- Cabinet dimensions 600 W x 800 D or 1000 D
- Lever handle, locks with 333 profile half-cylinder
- Effective cable ducting without negative effect on high IP or EMC functions

### Extensive range of components

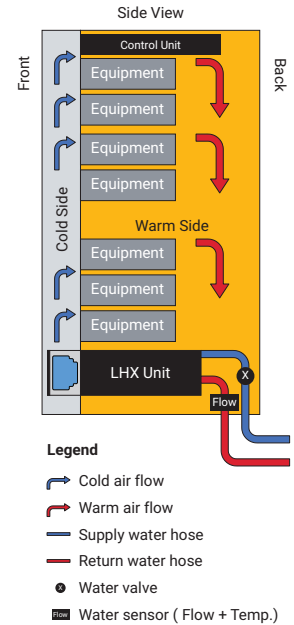

## COOLING

### Concept:

- 19-inch heat exchanger (6 U) installed in lower cabinet section
- Scalable cooling performance
  - Double fan unit for 10 kW cooling performance
  - Single fan unit for 5 kW cooling performance
- The fan units can be exchanged without having to replace the heat exchanger
- Air flow volume of ~ 100/1800 m³/h
- Water flow temperature from 6°C to 25°C
- Ambient temperature from 5°C to 50°C

### NORTH AMERICA

#### All locations

Tel.: +1.800.525.4682

### EUROPE

#### Germany

Tel.: +49.7082.794.0

#### France

Tel.: +33.3.88.90.64.90

### Sweden, Norway, Finland

Tel.: +46.8.683.61.00

#### UK, Ireland

Tel.: +44.144.2218.768

#### Poland

Tel.: +48.22.209.98.35

#### Italy

Tel.: +39.02.932.714.1

### ASIA/PACIFIC

#### VR China

Tel.: +86.21.2412.6943

#### Singapore

Tel.: +65.6768.5800

#### Japan

Tel.: +81.45.476.0271

### MIDDLE EAST & INDIA

#### United Arab Emirates

Tel.: +971.4.823.8666

#### India

Tel.: +91.80.6715.2001

#### Turkey

Tel.: +90.541.3680941



Our powerful portfolio of brands:

CADDY ERICO HOFFMAN ILSCO RAYCHEM SCHROFF