


NXP i.MX 8M Plus for Industry 4.0 & AI

conga-QMX8-Plus




- NXP i.MX 8M Plus 14nm processor series with ARM 4-Core Cortex-A53 / M7 + NPU
- Enhanced AI, Machine Learning and Vision capabilities featuring NPU and integrated camera ISP's
- Ultra low power architecture with 2-5W
- Extended longevity up to 15 years
- Temperature range up to -40°C .. +85°C

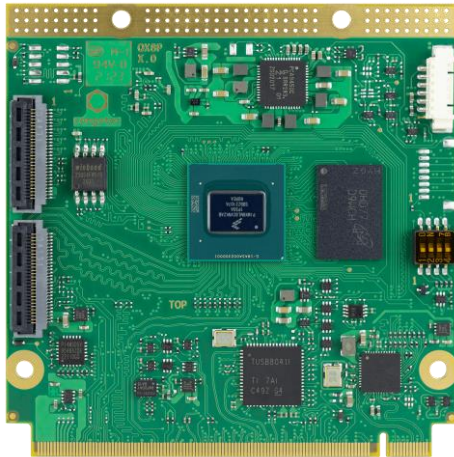

Form factor	Qseven Specification 2.1				
CPU SoC	NXP i.MX 8M Plus Processor Cores				
		ARM Cortex-A53	ARM Cortex-M7	NPU	GPU
	i.MX 8M Plus Quad (consumer) i.MX 8M Plus Quad (industrial)	4x @ 1.8 GHz 64bit 4x @ 1.6 GHz 64bit	1x @ 800MHz 1x @ 800MHz	1x up to 2.3 TOPS 1x up to 2.3 TOPS	GC7000UL/GC520L GC7000UL/GC520L
DRAM	Up to 6 GByte onboard LPDDR4 memory 4000 MT/s inline ECC				
AI & Machine Learning	Neural Processing Unit (NPU) with up to 2.3 TOPS NXP eIQ ML SW tools and libraries				
Ethernet	1x Gbit Ethernet with IEEE 1588 and TSN Support				
I/O Interfaces	1x dual-role USB 3.0 3x USB 2.0 1x USB 3.0 1x SDIO 3.0 1x onboard µSD card socket 1x PCIe 3.0 2x I ² C 1x SPI 1x UART with Handshake 1x CAN FD 12x GPIOs				
Mass Storage	eMMC 5.1 up to 128 GByte SPI NOR Flash up to 64MByte				
Sound	1x I ² S HiFi 4 DSP				
Graphics	Integrated in SoC GC7000UL 3D graphics with 2 high performance vec4 shaders GC520L 2D graphics VPU up to 1080p60 H.265/H.264 decoding and encoding OpenGL ES 3.1 Vulkan OpenCL 1.2 FP OpenVG 1.1 2 independent displays				
Video Interfaces	1x dual channel 24-bit LVDS 1x HDMI 2.0a 1x MIPI-DSI 4-lane shared with second LVDS channel 2x MIPI-CSI 4-lane onboard connectors 2x integrated Image Signal Processor (ISP) for cameras with up to 12 MP resolution				
Features	Watchdog Timer Cortex-A53 Console optional JTAG debug interface High Precision Real Time Clock				
Security	Cryptographic Acceleration and Assurance Module (CAAM) Resource Domain Controller ARM®TrustZone® High Assurance Boot support SHE, Encryption Engine AES-128, AES-256, 3DES, RC4, RSA4096, TRNG SHA-1, SHA-2, SHA-256, MD-5 RSA-1024, 2048, 3072, 4096 and secure key storage side channel attack resistance				
Boot Loader	U-Boot boot loader				
Operating Systems	Linux, Yocto Project Android				
Power Consumption	Typical application 2-5W @ 5V				
Temperature Range	Operating Temperature Range:		0 to +60°C commercial grade -40 to +85°C industrial grade		
	Storage Temperature Range:		-40 to +85°C		
Humidity	Operating: 10 - 90% r. H. non cond.		Storage: 5 - 95% r. H. non cond.		
Size	70mm x 70 mm				

conga-QMX8-Plus | Block Diagram

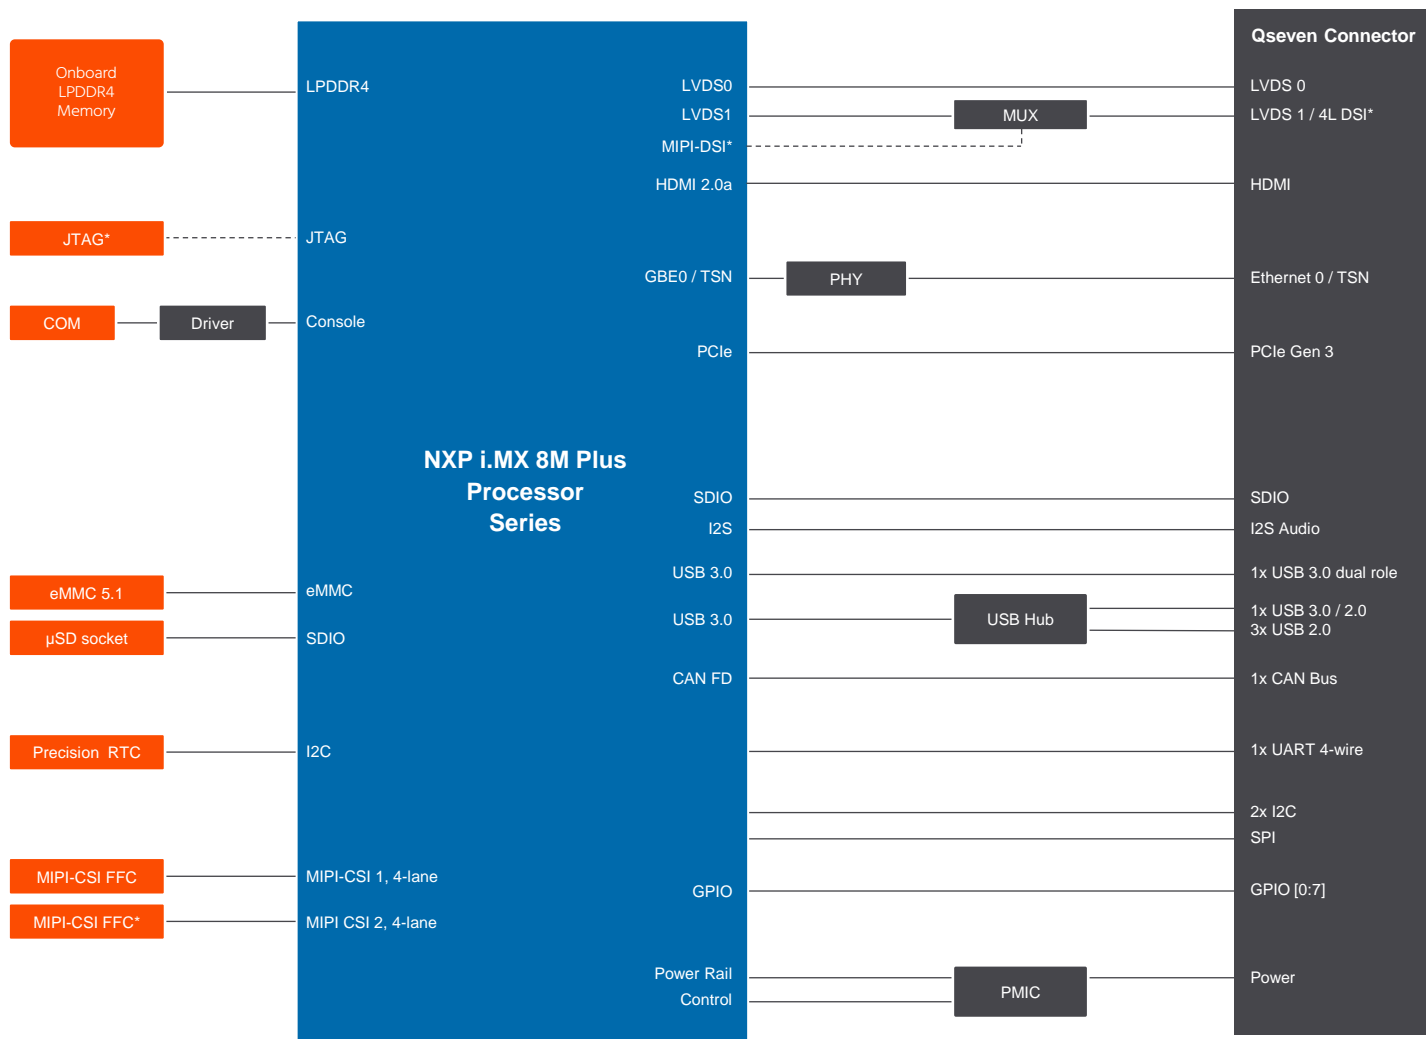

* Assembly Option
 ** Shared with Console

conga-QMX8-Plus | Order Information

Article	PN	Description
conga-QMX8-Plus/i-QC-NPU-4G eMMC16	061620	Qseven module with low-power 14nm NXP i.MX 8M Plus Quad processor. Features 4x ARM® Cortex®-A53 @ 1.6GHz +1x ARM® Cortex®-M7 + NPU, 4GB onboard LPDDR4 memory and 16GB onboard eMMC. Industrial grade temperature range from -40°C to 85°C.
conga-QMX8-Plus/i-QC-NPU-2G eMMC16	061621	Qseven module with low-power 14nm NXP i.MX 8M Plus Quad processor. Features 4x ARM® Cortex®-A53 @ 1.6GHz +1x ARM® Cortex®-M7 + NPU, 2GB onboard LPDDR4 memory and 16GB onboard eMMC. Industrial grade temperature range from -40°C to 85°C.
QMX8-Plus/HSP-T	061650	Standard heatspreader for Qseven module conga-QMX8-Plus with NXP i.MX 8M Plus ARM processor. All standoffs are 2.5mm thread.
QMX8-Plus/HSP-B	061650	Standard heatspreader for Qseven module conga-QMX8-Plus with NXP i.MX 8M Plus ARM processor. All standoffs are with 2.7mm bore hole.
QMX8-Plus/CSP-T	061650	Passive cooling for Qseven module conga-QMX8-Plus with NXP i.MX 8M Plus ARM processor. All standoffs are 2.5mm thread.
QMX8-Plus/CSP-B	061650	Passive cooling for Qseven module conga-QMX8-Plus with NXP i.MX 8M Plus ARM processor. All standoffs are with 2.7mm bore hole.
conga-QEVAL/Qseven 2.0 ARM	007005	Evaluation carrier board for Qseven ARM modules.
conga-DP/HDMI adapter 4k	500030	conga-DP/HDMI adapter 4k is used for evaluation of the DP/HDMI graphics interface of x86 Qseven and COM Express modules in combination with the congatec evaluation carrier boards conga-QEVAL and conga-TEVAL. It supports full 4k display resolution.
RS232 adapter cable for conga-ARM modules	48000023	RS232 adapter cable for congatec ARM modules console debug application.
Basler dart camera daA3840-30mc	44500041	Basler dart BCON for MIPI camera module daA3840-30mc, 8Mpx, 30fps, 4 CSI2-Lanes, S-Mount.
FFC Basler dart BCON for MIPI, 200mm	10000399	FFC 28 pin cable for Basler BCON dart cameras, 0,5mm pitch. compatible with 28 pin Hirose ZIF connector (PN: FH41-28S-0.5SH(05))
Evetar Lens M118B0418IR F1.8 f4mm 1/1.8" - Lens	10000429	Evetar Lens M118B0418IR F1.8 f4mm 1/1.8" - Lens for Basler dart camera module daA3840-30mc

© 2021 congatec AG. All rights reserved.

All data is for information purposes only. Although all the information contained within this document is carefully checked, no guarantee of correctness is implied or expressed. Product names, logos, brands, and other trademarks featured or referred are the property of their respective trademark holders. These trademark holders are not affiliated with congatec AG.
Draft Rev. 0.3, September 2, 2021