


# GENE-APL5

3.5" SubCompact Board with Intel® Pentium® N4200/ Celeron® N3350 Processor SoC

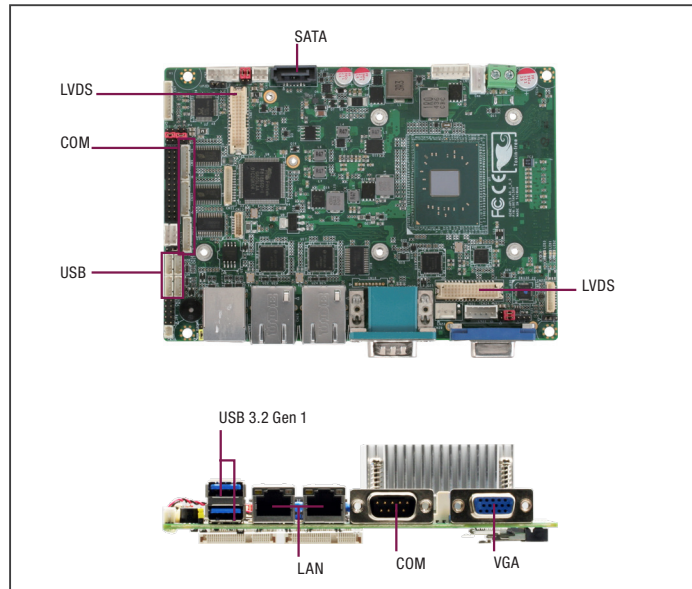

## Specifications

SYSTEM	
FORM FACTOR	3.5" SubCompact Board
CPU	Intel® Atom™/Celeron®/Pentium® Processor Pentium N4200 (4C/4T,1.10GHz, up to 2.50GHz) Celeron N3350 (2C/2T,1.10GHz, up to 2.40GHz) Atom E3950 (4C/4T,1.66GHz, up to 2.00GHz) Atom E3940 (4C/4T,1.60GHz, up to 1.80GHz) Atom E3930 (2C/2T,1.30GHz, up to 1.80GHz)
CPU TDP	6W: N4200, N3350 12W: Atom® E3950 9.5W: Atom® E3940 6.5W: Atom® E3930
CHIPSET	Integrated with Intel® SoC
MEMORY TYPE	DDR3L up to 1866MHz, SODIMM x 1, up to 8GB, Non-ECC
BIOS	UEFI
WAKE ON LAN	Yes
WATCHDOG TIMER	255 Levels
SECURITY	TPM 2.0 (Optional)
RTC Battery	Lithium Battery 3V/240mAh
DIMENSION (L X W)	5.75" x 4" (146mm x 101.7mm)
POWER	
POWER REQUIREMENT	+12V (Optional: +9-19V)
POWER SUPPLY TYPE	AT/ATX
CONNECTOR	Phoenix 2-pin Connector
POWER CONSUMPTION	Intel® E3950, DDR3L 1866MHz 8GB, 2.03A @+12V(TYPICAL) Intel® E3950, DDR3L 1866MHz 8GB, 2.45A @+12V(MAX)
DISPLAY	
CONTROLLER	Intel® HD Graphics 500/505
LVDS/eDP	LVDS1 Dual Channel 18/24bit x 1 LVDS2 Dual Channel 18/24bit x 1 (Optional: HDMI1.4b)
Display Interface	VGA x 1
Multiple Display	Up to 3 Simultaneous Displays
AUDIO	
CODEC	Realtek ALC897/892
AUDIO INTERFACE	Line-in/Line-out/MIC
Speaker	—
EXTERNAL I/O	
ETHERNET	Intel® i210/i211, 10/100/1000Base, RJ-45 x 2
USB	USB3.2 Gen 1 x 2
SERIAL PORT	COM1 (RS232, supports RI)
VIDEO	VGA x 1
INTERNAL I/O	
USB	USB2.0 x 4

## Features

- Intel® Pentium® N4200/ Celeron® N3350 Processor SoC
- DDR3L 1866 MHz SODIMM x 1, up to 8 GB
- VGA/LVDS/LVDS2 (HDMI Co-layout with LVDS2 Optional)
- 2 CH Audio, SATA 6.0 Gb/s x 1
- Supports 8-bit Digital I/O , USB 2.0 x 4 , USB 3.2 Gen 1 x 2 , COM x 4
- Mini Card x 1 (Half-size), mSATA x 1 (Full size)
- DC 12V Only or +9~19V (Optional), AT/ATX Mode
- Supports TPM (Optional)
- 4/5/8-wire Resistive Touch Screen Controller (Optional)



SERIAL PORT	COM2, COM3 (RS232/422/485, supports 5V/12V/RI), COM4 (RS232, supports RI)
VIDEO	LVDS1 x 1, LVDS2/HDMI x 1 (Default: LVDS2)
SATA	SATA III x 1, +5V SATA Power Connector x 1
AUDIO	Audio Header x 1
DIO/GPIO	8-bit
SMBus/I2C	I2C x1, SMBus x 1
Touch	4/5/8-wire Touch Controller x 1 (optional)
FAN	DC Fan x 1 (optional: Smart Fan)
SIM	Micro SIM x 1 (Optional)
Front Panel	HDD LED, PWR LED, Power Button, Buzzer, Reset
Others	Parallel Port(SPP/EPP/ECP) x 1 (optional, select by BIOS)
EXPANSION	
Mini PCI-E/mSATA	mSATA x 1 (Full-Size), Mini Card x 1 (Half-Size)
M.2	—
Others	—
ENVIRONMENT & CERTIFICATION	
OPERATING TEMP	32°F ~ 140°F (0°C ~ 60°C)
STORAGE TEMP	-40°F ~ 176°F (-40°C ~ 80°C)
OPERATING HUMIDITY	0% ~ 90% relative humidity, non-condensing
MTBF (HOURS)	365,976
EMC	CE/FCC Class A


## Optional Accessories

Part Number	Description	QTY per Board
1700050207	USB Cable, 20cm	2
1701090150	COM Cable, 15cm	3
1709100254	Audio Jack Cable, 25cm	1
1709070500	SATA CABLE, 50cm	1
170204010R	Power Cable, 10cm	1
1702150155	SATA Power Cable, 15cm	1
170220020B	ATX Power Cable, 20cm	1

## Packing List


Part Number	Description	QTY
GENE-APL5	GENE-APL5 MB	1
M16BT07020	Heatsink	1

## Block Diagram

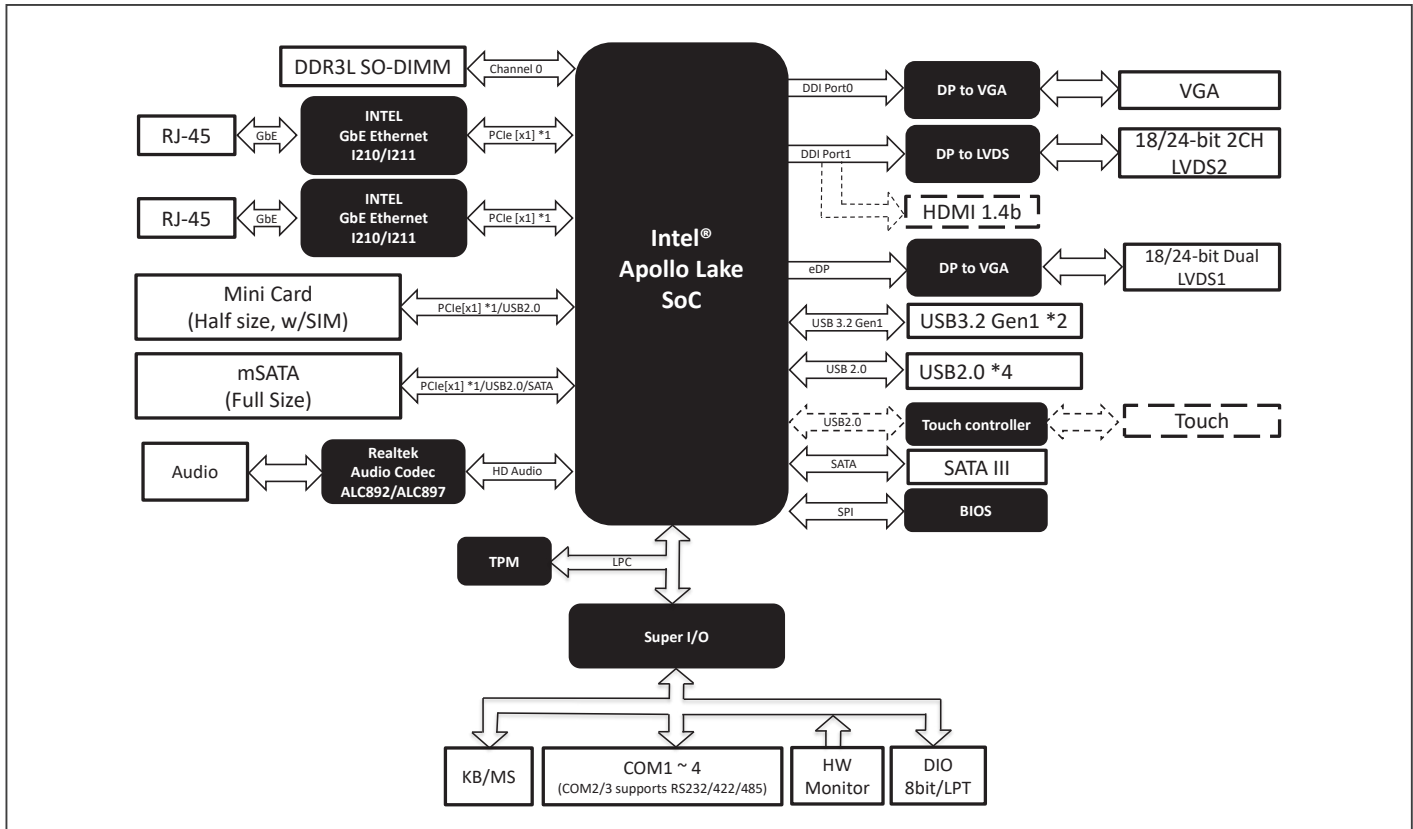

## Dimension

Unit: mm

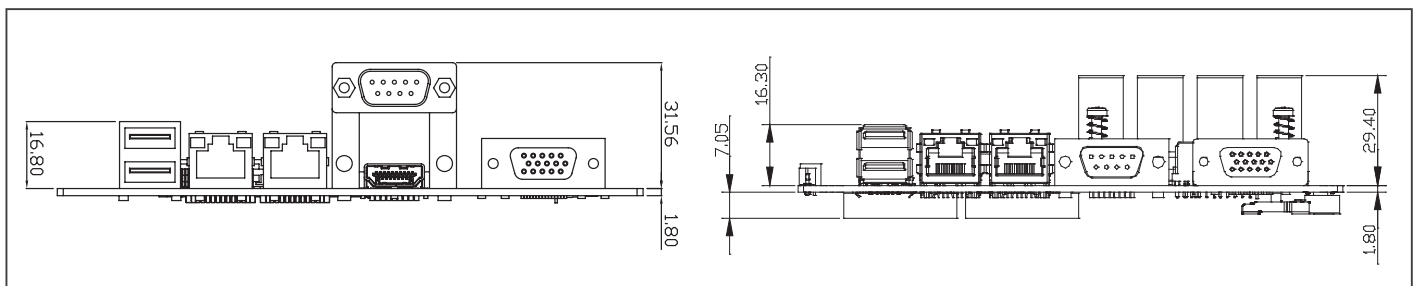

## Ordering Information

Part Number	CPU	Display	LAN	USB	RS-232	RS-232/422/485	Storage	Expansion Slot	TPM	Power	Operating Temp	Others
GENE-APL5-A12-F001	N3350	VGA/LVDS	GbE x 2	USB 3.2 Gen 1 x 2, USB 2.0 x 4	2	2	SATA x 1, mSATA x 1 (Full-size)	MiniCard x 1 (Half-size)	—	12V	0°C – 60°C	DIO x 8
GENE-APL5-A12-F002	N3350	VGA/LVDS/LVDS2	GbE x 2	USB 3.2 Gen 1 x 2, USB 2.0 x 4	2	2	SATA x 1, mSATA x 1 (Full-size)	MiniCard x 1 (Half-size)	2.0	9–19V	0°C – 60°C	Touch Controller, SIM, DIO x 8
GENE-APL5-A12-F003	N4200	VGA/LVDS/LVDS2	GbE x 2	USB 3.2 Gen 1 x 2, USB 2.0 x 4	2	2	SATA x 1, mSATA x 1 (Full-size)	MiniCard x 1 (Half-size)	2.0	9–19V	0°C – 60°C	Touch Controller, SIM, DIO x 8