


## PLUGS/CONNECTING CABLES PLS-C for PLS/PLS SL

PRODUCT	LENGTH	ARTICLE NUMBER (1 piece)	ARTICLE NUMBER (5 pieces)
Mains connection cable with safety plug and GST18/3 socket	1 m	17399091090	17399591090
	3 m	17399095090	17399595090
Mains connection cable with GST18/3 plug	1 m	17399091092	17399591092
	3 m	17399095092	17399595092
Mains connection cable with GST18/3 socket	1 m	17399091091	17399591091
	3 m	17399095091	17399595091
Connecting cable with GST18/3 plug and socket	0.5 m	17398089093	17398589093
	1 m	17398091093	17398591093
	2 m	17398093093	17398593093



## SOCKETS

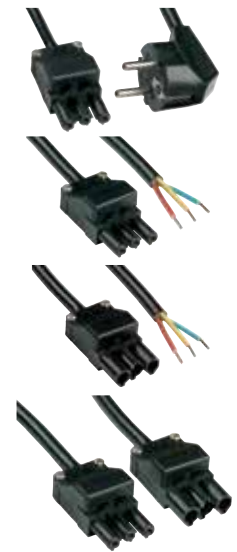

PRODUCT	PPS D	PPS F	PPS USA	
ARTICLE NO.	17401000000	17402000000	17403000000	Unit
<b>DATA</b>				
Rated voltage ±10 %	AC 250		AC 125	V
Nominal current	10 A DC / 16 A AC		15 A AC	
Contact material	CuZn37			
Insulation material	PA			
Colour	grey			
Operating temperature	-20 ... +60			°C
Type of mounting	snap fastening for 35 mm profile bars according to EN 60715			
Cable cross-section	single wire: 0.2-4 mm <sup>2</sup> / fine-stranded: 0.2-2.5 mm <sup>2</sup> / AWG 24-AWG 12			
Insulation stripping length	8			mm
Standards/approvals	IEC 83, DIN 49440-1		UL I NEMA 5-15	

## PRESSURE COMPENSATION DEVICE



## MOUNTING SUPPORT



PRODUCT	PPC	
ARTICLE NO.	5 PIECES	17410050000
		Unit
<b>DATA</b>		
Thread	M12 x 1.5-10 mm	
Material	polyamide 6 O ring: perbunan	
Operating temperature	-40 ... +120	°C
Colour	RAL 7035	
System of protection	IP 66   IP 68   IP 69K	

PRODUCT	PDR	
ARTICLE NO.		17411000000
		Unit
<b>DATA</b>		
Fastening	self-adhesive	
Material	sheet steel, galvanised	
Operating temperature	-30 ... +70	°C
Dimensions (HxWxD)	35 x 70 x 7	mm
Load capacity after 24 h waiting period	500	g