JETBOX-FLOYD NVIDIA Jetson Nano / NX AI-at-the-edge computing platform









FEATURES

Complete system with Jetson Nano or NX module and Linux OS installed

1 or 2 gigabit Ethernet ports

Optional PoE+ support (with external power source)

2 HDMI 2.0a/b ports

1 USB 3.0 port with type A connector

2 USB 2.0 ports with type A connector;

1 port can serve as OTG

8 GPIO with 3.3V logic levels

2 serial ports with RS-232/422/485 (depending on model)

3 dual/quad lane MIPI/CSI camera ports

1 CAN port (NX module only)

1 Mini PCIe socket with PCIe and USB support

1 M.2 2280 PCIe x1 or x4 NVME socket Input voltage 7-28VDC; 12VDC universal AC adapter included Operating temperature -25 to +80oC

Dimensions: 175mmW x 91mmD x 53mmH / 6.9"W x 3.6"D x 2.1"H

JETBOX-FLOYD is a compact Nvidia Jetson AI computing platform ready to deploy. It includes the Jetson Nano or NX module installed on our **FLOYD** carrier board with a Linux OS installed and preconfigured to support all the I/O on Floyd.

The system is available multiple standard configurations to meet a range of customer needs. The 01 full-feature models feature dual Ethernet ports with PoE support using an external power injector, two multiprotocol serial ports, dual HDMI displays, and a PCIe / USB minicard socket. The 02 low-cost models have fewer baseline I/O features but offer a faster-performance PCIe x4 NVME M.2 socket. Both models will support one channel of CAN 2.0B with the Xavier NX module installed.

Jetbox-Floyd features multiple expansion sockets for additional I/O and storage capacity to meet a wide range of application needs. Dual SMA antenna cutouts support the installation of wifi and cellular modem modules for network connectivity. The enclosure is DIN rail mountable or can be used in a "table top" scenario.

The system is compatible with both 12V and 24V DC power supplies. A 12VDC universal AC adapter is included with the system.


System Kit

Customers who want to build JetBox systems and supply their own Jetson modules can purchase our kits. You install and program the Jetson module, then assemble the system yourself. JB-FLD-BASE-01 includes the full-featured Floyd BB01 carrier, while JB-FLD-BASE-02 includes the Floyd BB02 low-cost carrier.

Jetbox-Floyd is available in four standard baseline configurations of Jetson module and baseboard features:

| Feature | JB-FLD-NAO-01 | JB-FLD-NAO-02 | JB-FLD-XNX-01 | JB-FLD-XNX-02 | |
|-------------------|----------------------|-------------------------|----------------------|-------------------------|--|
| Jetson module | Nano | Nano | Xavier NX | Xavier NX | |
| Gigabit Ethernet | 2 | 1 | 2 | 1 | |
| PoE | Both ports | No | Both ports | No | |
| HDMI | 2 | 1 | 2 | 1 | |
| Camera CSI 4-lane | 3 | 3 | 3 | 3 | |
| USB 3.0 | 1 | 1 | 1 | 1 | |
| USB 2.0 | 2 | 2 | 2 | 2 | |
| M.2 2280 socket | PCIe x1 | PCIe x4 | PCIe x1 | PCIe x4 | |
| Minicard socket | Full size PCIe + USB | No | Full size PCIe + USB | No | |
| SD card | Yes | Yes | Yes | Yes | |
| GPIO 3.3V | 8 | 8 | 8 | 8 | |
| Serial | 2x RS-232/422/485 | 1x RS-232 1x RS-232/485 | 2x RS-232/422/485 | 1x RS-232 1x RS-232/485 | |
| CAN 2.0 | No | No | 1 | 1 | |



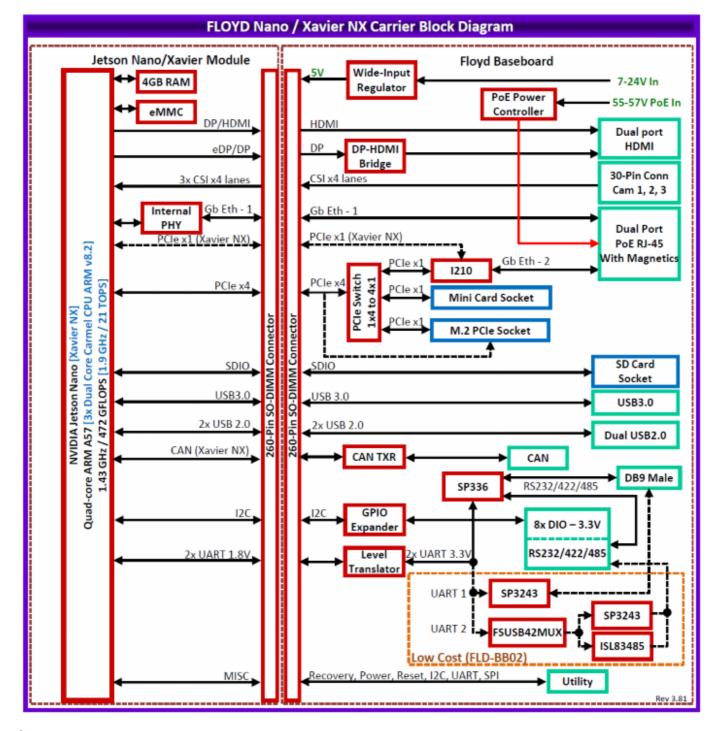


♦ I/O Expansion

Jetbox-Floyd includes several options for I/o and memory expansion:

- The M.2 2280 socket may be used for additional flash storage using Diamond's flashdisks up to 2TB in capacity, or for I/O modules in M.2 2280 format. On 01 models the socket has a PCIe x1 interface, while on 02 models the interface is PCIe x4.
- The PCIe minicard socket accepts any full-size PCIe- or USB-based minicard. Check to be sure that drivers compatible with Nvidia Linux are available.
- A micro-SD card socket is also available for adding flash storage.

Note that all Jetson modules include built-in flash memory. Check the Jetson datasheets for specifics. This built-in flash contains Diamond's customized Linux based on Nvidia Jetpack for the installed Jetson module.

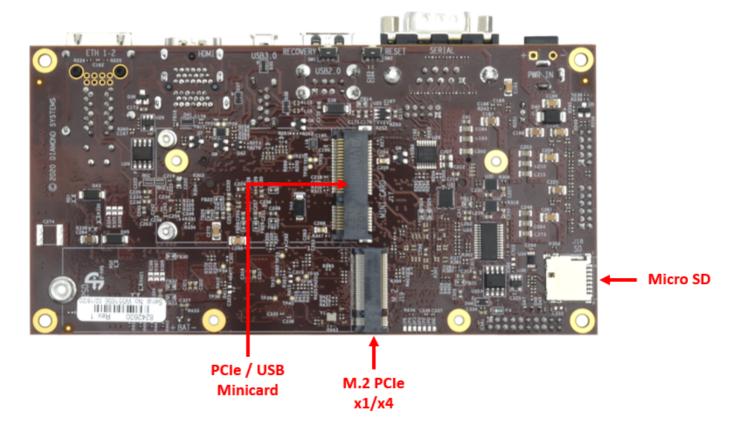

Customization

Jetbox-Floyd can be customized to fit your application needs. Typical customizations include:

- Change of case size / shape to accommodate additional I/O or electronics
- Installation of flash memory or minicard I/O modules
- Branding with your color and logo
- Change in I/O connector assortment based on your I/O needs
- Conformal coating of internal electronics
- Customization of the Linux OS or loading of your custom software

Please contact Diamond Systems Sales for further information.

Models and Accessories

JETBOX-FLOYD

available models:

| JB-FLOYD-NAO-01 | Jetbox-Floyd complete Nano system based on Floyd BB01 full-feature carrier board; includes module, OS, and enclosure | Available |
|-----------------|--|-----------|
| JB-FLOYD-NAO-02 | Jetbox-Floyd complete Nano system based on Floyd BB02 low-cost carrier board; includes module, OS, and enclosure | Available |
| JB-FLOYD-XNX-01 | Jetbox-Floyd complete NX system based on Floyd BB01 full-feature carrier board; includes module, OS, and enclosure | Available |
| JB-FLOYD-XNX-02 | Jetbox-Floyd complete NX system based on Floyd BB02 low-cost carrier board; includes module, OS, and enclosure | Available |
| JB-FLD-BASE-01 | JetBox Floyd-SC Kit, BB01 Baseboard, Without Jetson Module | Available |
| JB-FLD-BASE-02 | JetBox Floyd-SC Kit, BB02 Baseboard, Without Jetson Module | Available |

Please login or signup for an online quote request.

www.diamondsystems.com | Sunnyvale, California USA | +1-650-810-2500 | sales@diamondsystems.com