


RP6850 RACKPOWER IPDU, RP6850, 230/400 VAC, 3-PHASE

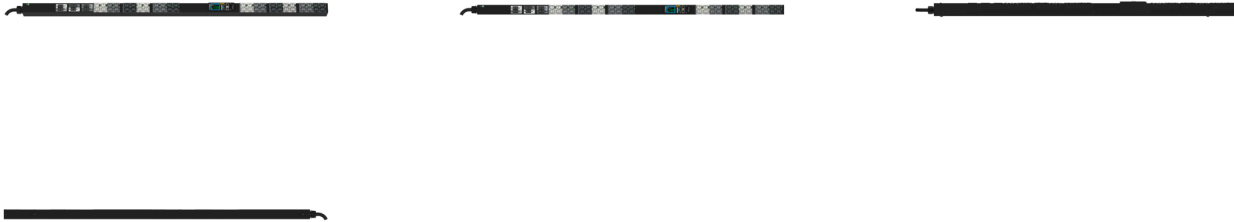

KEY FEATURES

RackPower RP6xxx Intelligent Power Distribution Units monitors input and outlet power of the entire PDU and offers remote switching of individual outlets, provides billing grade unit level monitoring

High Visibility Data Display and Interactive Graphic Display

Measure circuit breaker loads across redundant feeds to avoid accidental downtime

Enables smart load balancing for power efficiency and maximized capacity utilization

Gigabit Ethernet Interface and redundant Ethernet (10/100)

iPDU DC power redundancy solution for up to 64 PDU's

Toolless Hot-Swap Controller

Input Voltage Range 200-240/346-415VAC, 3-phase WYE

Connecting cable 6", with IEC 60309 3P+N+E connector

C13 and C13/C19 Combo outlets

User-defined power-on time delay or automatic power-on sequencing

PRODUCT ATTRIBUTES

Product Type: Socket Strip

Socket Type: IEC C13; IEC C13/C19

Number of Sockets: 48

Color: Black

With Switch: Yes

Length: 1780 mm

Voltage AC: 230 V

Function: Input Monitored; Outlet Monitored; Switched Outlets

Depth: 75 mm

Width: 56 mm

ADDITIONAL PRODUCT DETAILS

Modular, compact intelligent PDU with inlet metering and remote outlet switching. Ultra-Low Profile Design with only 50 mm height.

Please order bracket for vertical mounting separately.

North America

All locations
+1.763.422.2661
Chat with us:
schroff.nvent.com

Europe

Straubenhardt, Germany
+49.7082.794.0
Betschdorf, France
+33.3.88.90.64.90
Warsaw, Poland
+48.22.209.98.35
Assago, Italy
+39.02.932.7141
Chat with us:
schroff.nvent.com

Asia

Shanghai, China
+86.21.2412.6943
Qingdao, China
+86.532.8771.6101
Singapore
+65.6768.5800
Shin-Yokohama, Japan
+81.45.476.0271
Chat with us:
schroff.nvent.com

Middle East & India

Dubai, United Arab Emirates
+971.4.378.1700
Bangalore, India
+91.80.6715.2001
Istanbul, Turkey
+90.216.250.7374
Chat with us:
schroff.nvent.com



Our powerful portfolio of brands:
nVent.com **CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER**

© 2023 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners.

nVent reserves the right to change specifications without notice.