


EMP2-X801


mPCIe to eight RS-232/422/485 Module

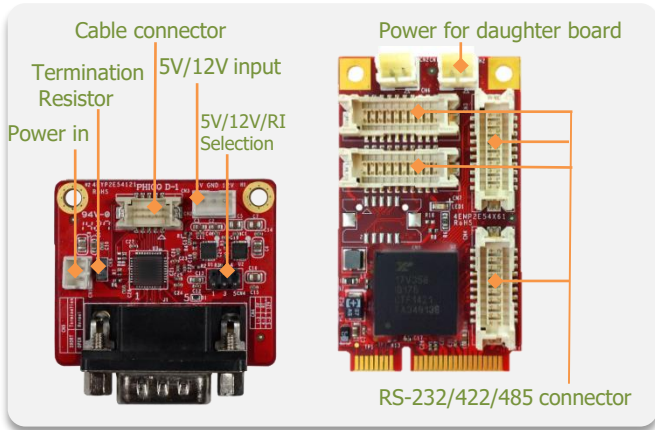


Features

- PCIe 2.0 compliant. RS-232/422/485 mode configurable by software.
- 4800 to 3Mbps serial data rate (RS-232 921.6Kbps) serial data rate. 16C550 compatible. 256-byte FIFOs
- Industrial temperature(-40 °C to 85 °C) operation.
- Flexible design with cable and daughter board x 8 (DB-9 connectors).
- Termination Resistor and 5V/12V output by jumper setting on daughterboard.
- ESD(Electrostatic Discharge) protection circuit to prevent system damage.
- 30μ" golden finger, 3-year warranty.
- Industrial design, manufactured in innodisk Taiwan

Mechanical Drawing

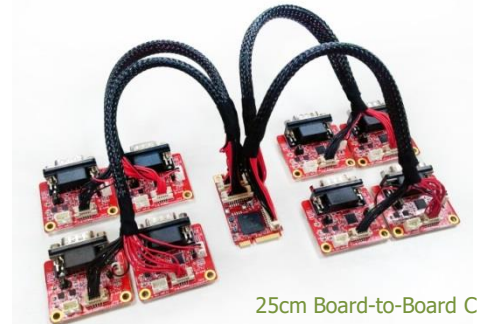

25cm Board-to-Board Cable

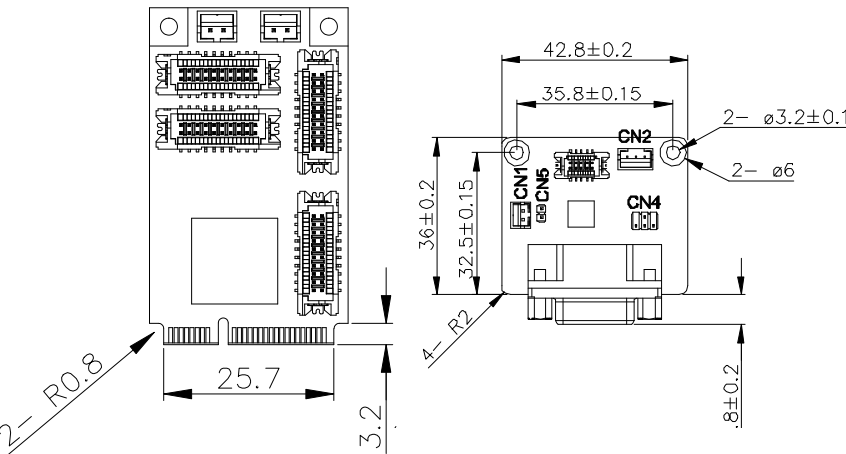

DB9 Pin define			
Pin	RS-232	RS-485/RS-422 full duplex	RS-485 half duplex
1	DCD	TX-	D-
2	RX	TX+	D+
3	TX	RX+	
4	DTR	RX-	
5	GND	GND	GND
6	DSR		
7	RTS		
8	CTS		
9	RI/5V/12V	5V/12V	5V/12V

Specifications

Headquarters (Taiwan)
 5F., No. 237, Sec. 1, Datong Rd.,
 Xizhi Dist., New Taipei City 221,
 Taiwan
 Tel: +886-2-77033000
 Email: sales@innodisk.com

Branch Offices:
USA
usasales@innodisk.com
 +1-510-770-9421

Europe
eusales@innodisk.com
 +31-40-3045-400

Japan
jpsales@innodisk.com
 +81-3-6667-0161

China
sales_cn@innodisk.com
 +86-755-2167-3689

www.innodisk.com

© 2018 Innodisk Corporation.
 All right reserved. Specifications
 are subject to change without
 prior notice.

November 24, 2022

Form-Factor	mPCIe
Input I/F	PCI Express 2.0 x 1
Output I/F	RS-232/422/485
Output Connector	DB-9 x 8
TDP	0.478W (3.3V x 145mA)
Dimension (WxLxH)	30 x 50.9 x 8.45 mm
Temperature	Operation: W/T: -40°C ~ +85°C Storage: -55°C ~ +95°C
Environment	Vibration: 5G @7~2000Hz, Shock: 50G @ 0.5ms
Notes	Please download driver from MyInnodisk website. Windows: XP(32 bit), 7(32/64 bit), 8/8.1(32/64 bit), 10, WES7, CE7.0 Linux: Kernel 2.6.x and above.(We can provide Linux source for modification.)

Order information

EMP2-X801-W1(Wide Temp.)
 mPCIe to 8 x RS-232/422/485 Module