


# MIO-5152

## Intel® Atom® x6000E series and Intel® Celeron® N and J series 3.5" SBC

NEW

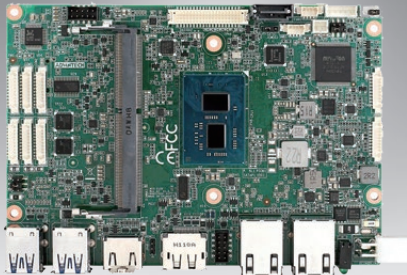

### Features

- Atom® x6000E series and Intel® Celeron® J and N series with Quad/Dual Cores, TDP 6W/ 10W/ 12W
- Single Channel DDR4-3200 up to 32GB
- 3 independent displays via LVDS, DP1.4, and HDMI2.0 up to 4K@60Hz
- Dual GbE, 6 USB, 6 UART, TPM2.0
- CE/FCC Class B, Coastline I/O ESD 8KV/15KV Criteria A
- Support Windows 10 LTSC & Ubuntu 20.04 LTS, embedded software APIs, WISE-DeviceOn

#### Software APIs:




ubuntu yocto Windows 10 iManager WISE-DeviceOn CE FCC

### Specifications

	Processor	Intel® Celeron® J6412	Intel® Celeron® N6210	Intel Atom® x6425E
Platform	Max Frequency	2.6GHz	2.6GHz	3.0GHz
	Base Frequency	2.0GHz	1.2GHz	2.0GHz
	Core/Thread	4/4	2/2	4/4
	LLC	L2	L2	L2
	CPU TDP	10W	6.5W	12W
	Chipset	Intel® Chipset (SoC Integrated)		
	BIOS	AMI EFI 256Mbit		
Memory	Technology	DDR4-3200 SDRAM		
	Max Capacity	32GB		
	Channel/Socket	Single Channel/ 1 Socket		
	ECC Support	N/A	N/A	In-Band ECC Supported by SoC
Graphic	Controller	Intel Gen11 Graphics Engines (SoC integrated)		
	Max Frequency	800MHz	750MHz	750MHz
	Base Frequency	400MHz	250MHz	500MHz
	Graphic Memory	TBU		
Display I/F	3D/HW Acceleration	DX12, OGL4.5, OCL1.2, Vulkan 1.1, MPEG2, H.264, JPEG/MJPEG, H.265 (HEVC)		
	LCD	1 x LVDS: Dual Channel 18/24-bit, up to 1920 x 1200		
	HDMI/DP	1 x HDMI2.0 up to 4096 x 2160 x 24bpp @ 60Hz 1 x DP1.4a, up to 4096 x 2160 x 36bpp@60Hz		
	Triple Display	3 simultaneous displays with LVDS, HDMI, DP		
External I/O	Ethernet	2 x RJ-45; LAN1: Realtek RTL8111H, LAN2: Realtek RTL8111H		
	HDMI/DP	1/1		
	USB3.2	4 x TypeA; 4 x USB3.2 Gen2 (10Gbps)		
	Power DC-Jack	Optional		
Internal I/O	SATA	1 x SATA GenIII 6.0 Gbps		
	USB	2 x USB2.0		
	Serial Bus	I2C		
	COM Ports	2 x RS-232/422/485 (Max baud rate: 1Mbps), 4 x RS-232		
	GPIO	8-bit general purpose input output I/O		
	Audio	Realtek ALC888S, Line-in/Line-out/MIC		
	Inverter	12V/5V		
	SPI Bus	eSPI		
	Fan	4-wire smart fan		
	Front Panel Control	Power-on, Reset, Buzzer, SATA LED, CaseOpen		
	Board Feature	Watchdog Timer	Programmable 1 ~ 255 sec/min	
TPM		TPM2.0		
Expansion	M.2 E-Key/B-Key	1 x E-Key 2230 (PCIex1, USB2.0) Optional B-key 3042 w/ NanoSIM		
	M.2 M-Key	1 x M-key 2242 (SATA)		
Power	Supply Voltage	Vin: DC 12V ± 10%; RTC Battery Lithium 3V/210mAh		
	Connector	ATX 2x2pin 90D, optional DC-Jack		
	Power Management	AT, ATX mode		
	Max Consumption	21.39W	12.74W	25.06W
Idle Consumption	7.31W	10.53W	11.30W	
Environment	Temperature	Operating: Standard: 0 ~ 60° C (32 ~ 140° F) Storage: -40 ~ 85° C (-40 ~ 185° F)		
	Humidity	Operating: 40° C @ 95% relative humidity, non-condensing Storage: 60° C @ 95% relative humidity, non-condensing		
	Vibration Resistance	3.5 Grms		
Certification	EMC	CE, FCC Class B		
Mechanical	Dimensions	146 x 102 mm (5.7" x 4")		
	Net weight			

## Block Diagram

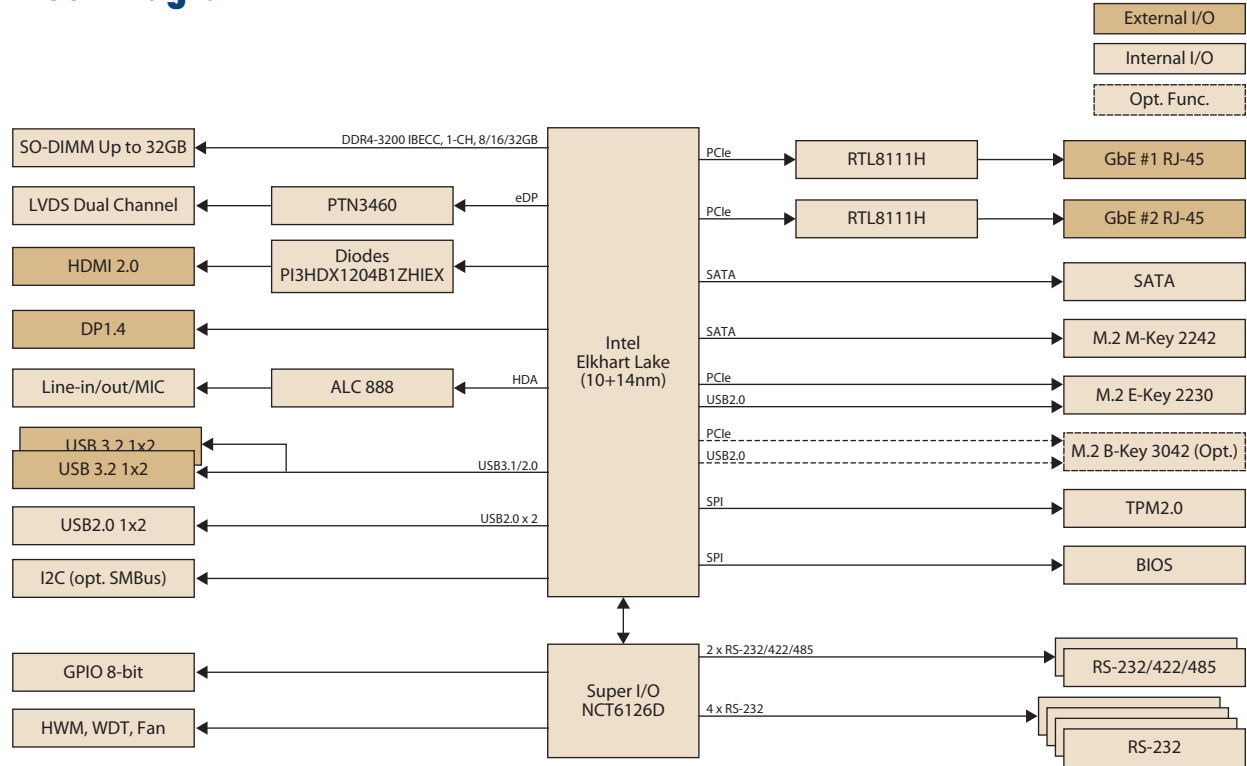

## Ordering Information

Part Number	CPU	TDP	Max. Frequency	Core	GbE	USB3.2	USB2.0	Cable Kit	Thermal solution	Operating Temp.
MIO-5152J-U6A1	Celeron® J6412	10W	2.6GHz	4	2	4	2	Y	Y; Passive	0 – 60° C
MIO-5152N-U6A1	Celeron® N6210	6.5W	2.6GHz	2	2	4	2	Y	Y; Passive	0 – 60° C
MIO-5152A-P0A1	Atom® x6425E	12W	3.0GHz	4	2	4	2	Y	Y; Passive	0 – 60° C
MIO-5152JL-U6A1	Celeron® J6412	10W	2.6GHz	4	2	4	2	N	N	0 – 60° C
MIO-5152NL-U6A1	Celeron® N6210	6.5W	2.6GHz	2	2	4	2	N	N	0 – 60° C

## Packing List

Part No.	Description	Quantity
	MIO-5152 SBC	
2046515201	Startup Manual	1
1970005053T011	MIO-5152 Passive Heatsink for Celeron series	1
1970005053T001	MIO-5152 Passive Heatsink for x6000E	1
1700006291	M Cable SATA 7P/SATA 7P 30cm C=R 180/90	1
1700031583-01	M CABLE SATA 15P/1*2P-2.0 35cm	1
1700030406-01	M Cable 2*5P-2.0/USB-A 4P(F)*2 20cm	1
1700030404-01	F Cable D-SUB 9P(M)/1*10P-1.25 20cm	2
1700019584-01	A Cable 2*5P-2.0/Audio JACK*3 20cm	1

## Rear I/O View



## Optional Accessories

Part No.	Description
1970005542T001	MIO-5152 Heatspreader


## Embedded OS/API

Embedded OS/API	Part No.	Description
Windows 10	20706WX9ES0157	64-bit (UEFI Mode Only)
Ubuntu 20.04	20706U20DS0034	Ubuntu Desktop 20.04 LTS 64-bit Image & License Sticker for MIO-5152
Yocto	Support by Request	Yocto BSP and Test Image
Software API	Website Download	SUSI v4.0

# Reliable Embedded BIOS Solutions

Custom BIOS services with long-term support

Advantech's high-quality embedded BIOS solutions deliver rapid execution and feature expert BIOS team support. These solutions feature multi-functional designs that ensure security and enable power/boot management. Advantech further provides 10+ years of BIOS version management, internal management, and longevity support for both hardware and BIOS — enhancing application efficiency, diversifying functionality, and optimizing performance.

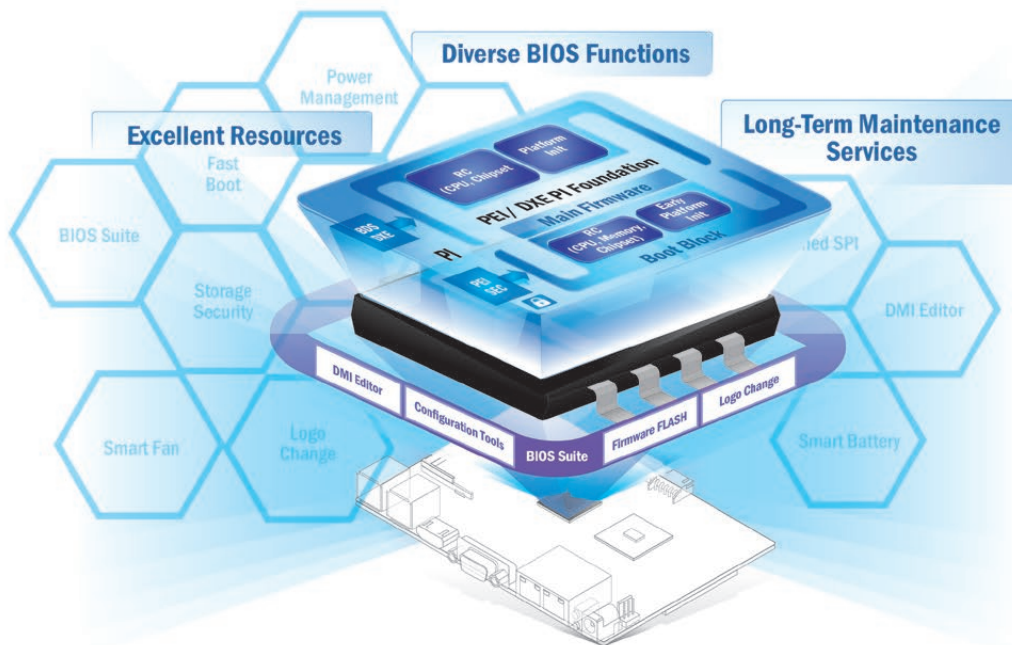

## Embedded BIOS Solution Advantages

### Sufficient Sources

- Strong partnership with BIOS vendors
- 50+ engineers with extensive industrial BIOS experience


### Diverse BIOS Functions

- Multi-layer security
- 3 second fast boot
- Power management
- BIOS suite utility

### Long-Term Maintenance Services

- Platform longevity support
- 10-year BIOS version control
- BIOS remote backup

## Value-Added Customization Process

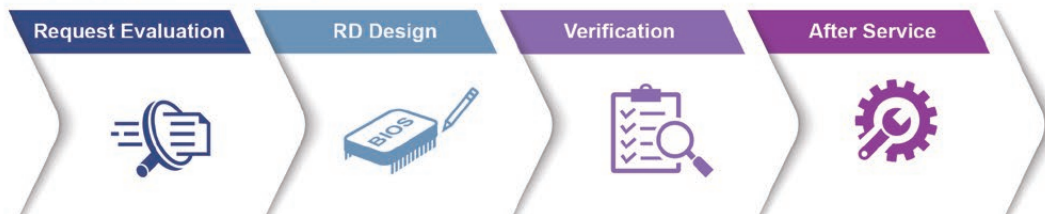

# Embedded Linux Support and Design-in Services

Hardware Certified Ubuntu and Yocto with Eco Partner Services

Linux is the most popular embedded OS for transportation, outdoor services, factory automation, and mission critical applications. Its open source and kernel reliability features ease security updates, and make it particularly adaptable to new AI and Edge computing technology. Advantech has cooperated with Canonical and other software partners to provide hardware certified Ubuntu image and Yocto BSP as Linux offerings. The Advantech, Embedded Linux, and Android Alliance (ELAA) delivers local software services and consultation.



## Features

<p><b>Certified OS and BSP</b></p> <ul style="list-style-type: none"> <li>Platform compatibility tests</li> <li>Preloaded functional driver and software stacks</li> </ul>	<p><b>Licensed Services</b></p> <ul style="list-style-type: none"> <li>License authorized Canonical delivers 10-years of bug fixes and security updates</li> <li>In-house bundled service</li> </ul>	<p><b>Numerous AI and Edge Resources</b></p> <ul style="list-style-type: none"> <li>Containerized technology for service provision and deployment</li> <li>AI resources from Caffe, TensorFlow, and mxnet</li> </ul>	<p><b>Local Partner Alliance</b></p> <ul style="list-style-type: none"> <li>Embedded Linux and Android Alliance (ELAA)</li> </ul>
--	--	--	---

# Edge AI Suite

AI development for diverse application at the Edge

Increasing demand for AI inference/analytic capabilities at the Edge make AI training models, software development environments, and hardware configuration key factors in successful solution deployment. Advantech's Edge AI Suite helps users build AI demo devices quickly and choose optimal hardware solutions easily.



5x Performance Boost	All-in-one Installation	One Click AI Experience	Plug-and-play Environment	Discover Cost-effective Hardware
<ul style="list-style-type: none"> <li>Integrated Intel® OpenVINO™ technology</li> <li>Boost AI using Advantech hardware</li> </ul>	<ul style="list-style-type: none"> <li>Build AI environment in under 5 minutes</li> <li>Ready-to-use configuration</li> </ul>	<ul style="list-style-type: none"> <li>User friendly configuration guidance</li> <li>One-click Benchmark acquisition</li> </ul>	<ul style="list-style-type: none"> <li>Easy access to 100+ AI inference extensions</li> <li>Software development package available</li> </ul>	<ul style="list-style-type: none"> <li>Diverse CPU/RAM options</li> <li>Find hardware solutions for AI development</li> </ul>

# WISE-DeviceOn

## Massive IoT Device Management Utility

IoT deployment and management typically involves numerous disparate devices installed on multiple sites. These devices require effective monitoring, managing, and tracking. Advantech's easy-to-use WISE-DeviceOn interface enables users to remotely monitor device health, troubleshoot problems, and send software/firmware updates over-the-air (OTA). In sum, DeviceOn empowers quick real-time responsiveness to emerging problems.



### Features

Comprehensive Management	Remote Access	Efficient Operations
<ul style="list-style-type: none"> <li>• Devices status</li> <li>• Peripherals/firmware</li> <li>• Open for extension</li> </ul>	<ul style="list-style-type: none"> <li>• Real-time monitoring</li> <li>• Remote controls</li> <li>• Troubleshooting</li> </ul>	<ul style="list-style-type: none"> <li>• Zero-touch on-boarding</li> <li>• OTA updates</li> <li>• Batch control</li> </ul>

### Product Highlights



**SOM-6883**

High-performance 11<sup>th</sup> Gen Intel<sup>®</sup> COMe Type 6 Module



**MIO-5375**

Compact 11<sup>th</sup> Gen Intel<sup>®</sup> Outdoor Focused 3.5" SBC



**EPC-B5587**

10<sup>th</sup> Gen Intel<sup>®</sup> Xeon<sup>®</sup> based Edge server



**EPC-R3220**

Arm based IoT Edge Gateway