


NanoCOM-TGU

COM Express Type 10 with 11th Gen Intel® Core™ Processors

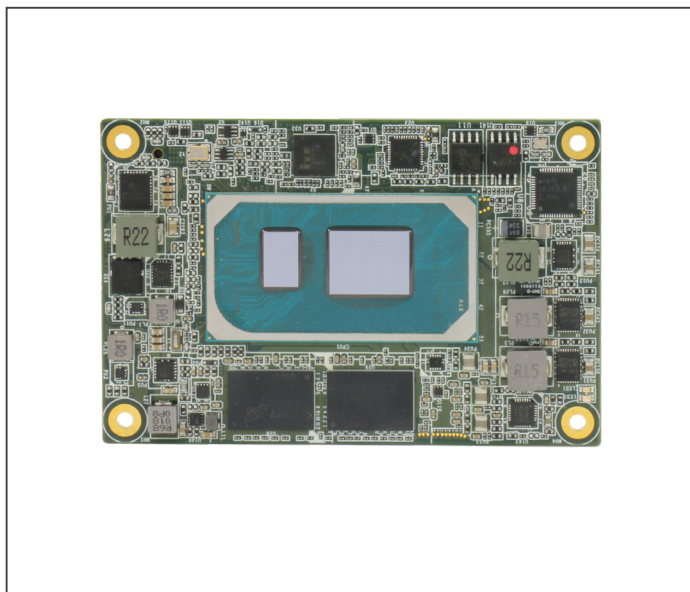

Features

- Onboard LPDDR4, up to 16GB
- SATA III x 2, Onboard PCIe SSD x 1
- eDP x 1, DDI x 1
- USB 2.0 x 8, USB 3.2 Gen 2 x 2
- PCIe 3.0 [x1] x 4
- Intel® I225-LM 2.5GbE x 1
- COM Express Type 10, 3.31" x 2.17" (84mm x 55mm)



Specifications

System	
Form Factor	COM Express Mini Size, Type 10
CPU	11th Generation Intel® Core™ Processors: Intel® Core™ i7-1185G7E (4C/8T, 1.80 GHz, 15W) Intel® Core™ i5-1145G7E (4C/8T, 1.50 GHz, 15W) Intel® Core™ i3-1115G4E (2C/4T, 2.20 GHz, 15W) Intel® Core™ i7-1185G9E (4C/8T, 1.80 GHz, 15W) Intel® Core™ i5-1145G9E (4C/8T, 1.80 GHz, 15W) Intel® Core™ i3-1115G9E (2C/4T, 2.20 GHz, 15W)
Chipset	Integrated with Intel® SoC
Memory	Onboard LPDDR4 4267MHz, up to 16GB
Onboard Storage	NVMe, up to 256GB (Optional)
BIOS	AMI UEFI
Wake on LAN	Yes
Watchdog Timer	255 Levels
Dimension	3.31" x 2.17" (84mm x 55mm)
Security	fTPM
Power	
Power Requirement	+12V and +5VSB for ATX, +12V for AT
Power Type	AT/ATX
Power Consumption (Typical)	Intel® Core™ i7-1185G7E, 2.75A @+12V
Display	
Graphics Controller	Intel® UHD Graphics for 11th Gen Intel® Processors
Video Output	Dual Display: DDI x 1, up to 3840 x 2160 eDP x 1, up to 3840 x 2160
I/O	
Ethernet	Intel® I225-LM/IT 2.5GbE x 1
Audio	High Definition Audio Interface
USB Port	USB 2.0 x 8, USB 3.2 Gen 2 x 2
Serial Port	2-Wire UART x 2 (Tx/Rx)
HDD Interface	SATA III x 2

Expansion	PCIe 3.0 [x1] x 4 LPC x 1
GPIO	8-bit
SMBus/I2C	I2C x 1, SMBus x 1
Environment	
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C) Optional: -40°F ~ 185°F (-40°C ~ 85°C)
Storage Temperature	-40°F ~ 185°F (-40°C ~ 85°C)
Operating Humidity	0% ~ 90% relative humidity, non-condensing
EMC	CE/FCC Class A
OS Support	Windows® 10 (64-bit) Linux Ubuntu 20.04.4/Kernel 5.13.0
Weight	0.15 lb. (0.07Kg)


Packing List

- NANOCOM-TGU


Optional Accessories

Part Number	Description
ECB-920A-A11-0001	COMe Type 6/10 Carrier Board. ATX. 2.5GbE. 8USB. 2COM. 4SATA. PCIe. AT/ATX. Rev. A1.1
NanoCOM-TGU-Fan01	Cooler. 84 x 55 x 18 mm. 4pin.
NanoCOM-TGU-HSP01	Heat Spreader. 84 x 55 x 11 mm. Black

Block Diagram Unit: mm

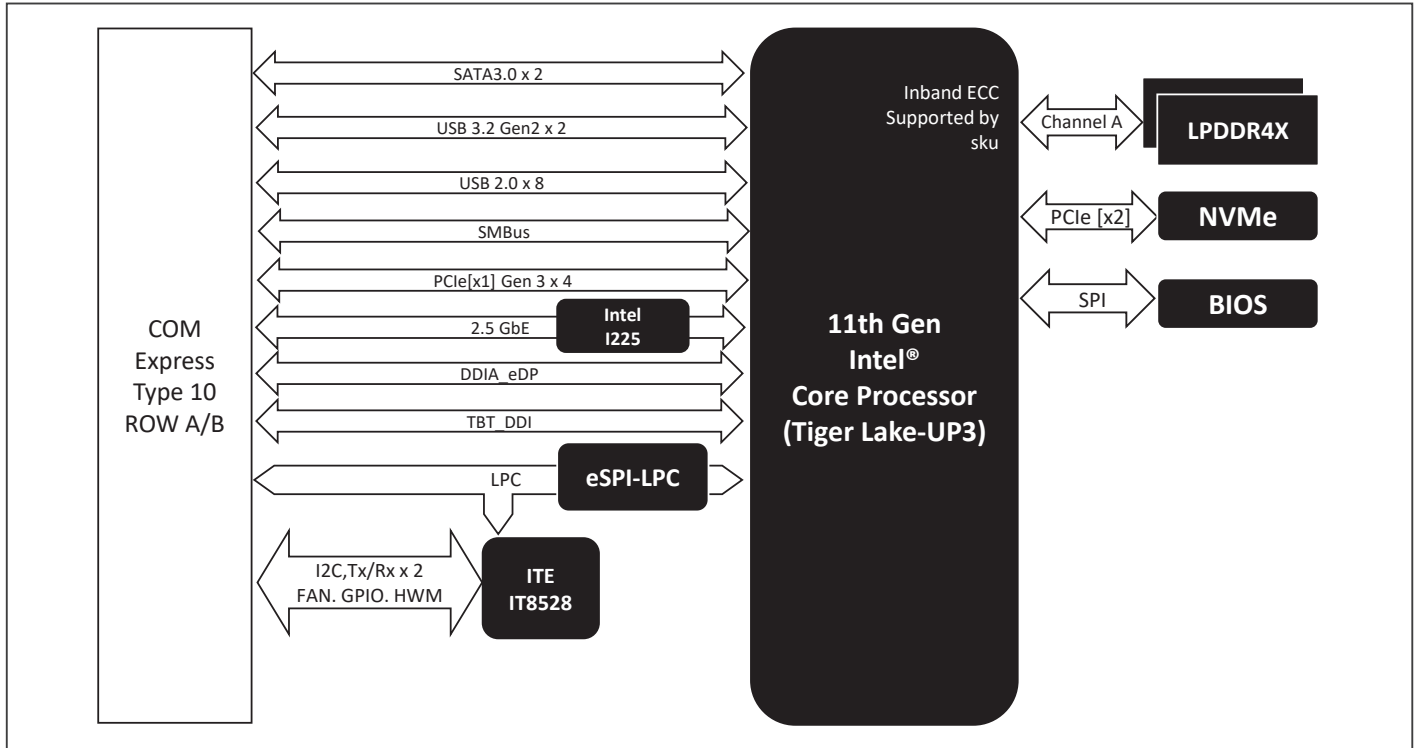

Dimension Unit: mm

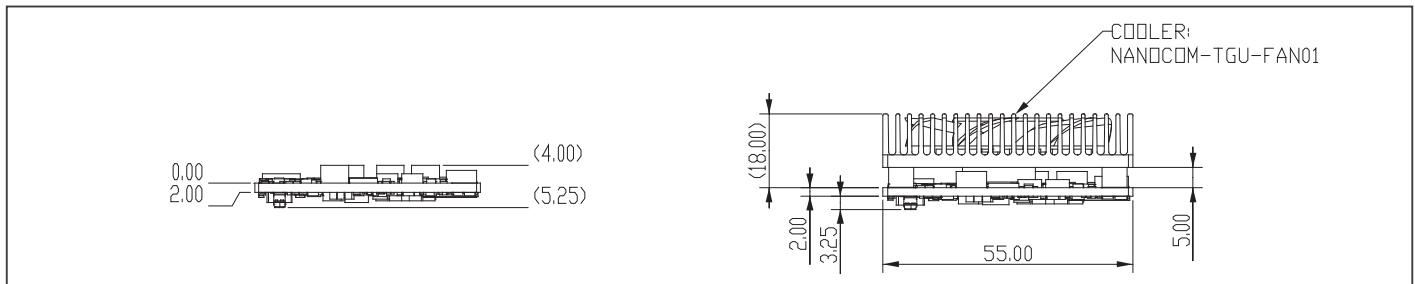

Ordering Information

Part Number	COM Express Type	CPU	Memory	ECC support	Display	Storage	LAN	USB	UART	Expansion	Power	Temperature	Others
NANOCOM-TGU-A10-0001	Type 10	Intel® Core™ i7-1187G7E	16GB Onboard DDR4	—	eDP x 1, DDI x 1	SATA III x 2, 64GB NVMe	Intel® I225-LM x 1	USB 3.2 Gen 2 x 2 USB 2.0 x 8	2-Wire UART x 2 (Tx/Rx)	PCIe 3.0 [x1] x 4	12V	0°C ~ 60°C	LPC, GPIO 8-bit, I2C, SMBus
NANOCOM-TGU-A10-0002	Type 10	Intel® Core™ i5-1145G7E	16GB Onboard DDR4	—	eDP x 1, DDI x 1	SATA III x 2, 64GB NVMe	Intel® I225-LM x 1	USB 3.2 Gen 2 x 2 USB 2.0 x 8	2-Wire UART x 2 (Tx/Rx)	PCIe 3.0 [x1] x 4	12V	0°C ~ 60°C	LPC, GPIO 8-bit, I2C, SMBus
NANOCOM-TGU-A10-0003	Type 10	Intel® Core™ i3-1115G4E	8GB Onboard DDR4	—	eDP x 1, DDI x 1	SATA III x 2, 64GB NVMe	Intel® I225-LM x 1	USB 3.2 Gen 2 x 2 USB 2.0 x 8	2-Wire UART x 2 (Tx/Rx)	PCIe 3.0 [x1] x 4	12V	0°C ~ 60°C	LPC, GPIO 8-bit, I2C, SMBus
NANOCOM-TGU-A10-0005	Type 10	Intel® Core™ i7-1185GRE	16GB Onboard DDR4	in-band ECC	eDP x 1, DDI x 1	SATA III x 2, 64GB NVMe	Intel® I225-LM x 1	USB 3.2 Gen 2 x 2 USB 2.0 x 8	2-Wire UART x 2 (Tx/Rx)	PCIe 3.0 [x1] x 4	12V	0°C ~ 60°C	LPC, GPIO 8-bit, I2C, SMBus
NANOCOM-TGUW2-A10-0001	Type 10	Intel® Core™ i7-1185GRE	16GB Onboard DDR4	—	eDP x 1, DDI x 1	SATA III x 2, 128GB NVMe	Intel® I225-IT x 1	USB 3.2 Gen 2 x 2 USB 2.0 x 8	2-Wire UART x 2 (Tx/Rx)	PCIe 3.0 [x1] x 4	12V	-40°C ~ 85°C	LPC, GPIO 8-bit, I2C, SMBus