



Vandal Proof



Dust Proof



Water Proof

# PRODUCT GALLERY

# COMPANY INTRODUCTION

Established in 2003, Inputel is specialized in developing and manufacturing of Industrial input devices like Silicone keyboards, metal keyboards, Glass keyboards, Trackballs and Touchpads used in adverse circumstances like humid and dusty places. Our Industrial Keyboards and Mice are rugged, waterproof, washable, dust-proof and easy to clean, Our products find applications in diverse areas such as industrial equipments, consumer electronics, medical instruments, vending machines, kiosks and defence equipments. We develop and produce a wide range of models including compact and full size, wired and wireless, normal and touchpad, regular and LED backlit keyboards. All our models are CE, FCC and RoHS tested and certified.

Located in Baoan, Shenzhen, China and with 1,500 square meters facility, we produce and export thousands of Keyboards and Mice each month. We have the ability of completing a custom item and having production ready in 30 days based on customers specific requirements. We strive to provide our customers with competitive pricing, high quality and outstanding services.





**Model Number: Wired Glass Keyboard GKB01**

Ip68 water and dust protection  
 Language layouts available on Request  
 Haptic or Audible feedback when typing  
 Plug and Play.Easy to install,no driver needed  
 Communication: USB2.0  
 Can be used with medical gloves and wet fingers  
 Weight: 0.87kg  
 Dimension: 436x160x20mm  
 Interface: USB  
 Material: Tempered Glass+Rugged ABS case  
 Color: Medical white  
 Key size: 18x18mm  
 Touchpad Size: 119x102mm  
 Box Dimension: 470x196x48mm  
 Carton: 50x40x30cm 10pcs/carton  
 Carton GW: 17.5KGS



**Model Number: Metal Keyboard with Trackball KB001**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 392mm x 110mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 No. of keys: 64 keys, high quality stainless steel  
 Track ball diameter: 38mm  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 1.80kg.  
 All languages version and interface are available on request.



**Model Number: Black Keyboard KB001-BL**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 392mm x 110mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 No. of keys: 64 keys, high quality stainless steel  
 Track ball diameter: 38mm  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 1.80kg.  
 All languages version and interface are available on request.



**Model Number: Metal Keyboard KB001-FL (Flat keys)**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 392mm x 110mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 No. of keys: 64 keys, high quality stainless steel  
 Track ball diameter: 38mm  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 1.80kg.  
 All languages version and interface are available on request.



#### **Model Number: Metal Keyboard with touchpadKB001T**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 392mm x 110mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 No. of keys: 64 keys, high quality stainless steel  
 Touch pad  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 1.60kg.  
 All languages version and interface are available on request.



#### **Model Number: Metal Keyboard KB001T-FL (Flat keys)**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 392mm x 110mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 No. of keys: 64 keys, high quality stainless steel  
 Touch pad  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 1.60kg.  
 All languages version and interface are available on request.



#### **Model Number: KB001T-P**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 400mm x 124mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Panel Mounting  
 No. of keys: 64 keys, high quality stainless steel  
 Touch pad  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 1.60kg.  
 All languages version and interface are available on request.



#### **Model Number: Kb002**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 300mm x 110mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 No. of keys: 64 keys, high quality stainless steel  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 1.40kg.  
 All languages version and interface are available on request.





#### Model Number: Metal Keyboard KB003

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 330mm x 100mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 No. of keys: 64 keys, high quality stainless steel  
 Track ball diameter: 25mm  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 1.50kg.  
 All languages version and interface are available on request.



#### Model Number: Metal Keyboard KB005

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 392mm x 135mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 No. of keys: 83 keys, high quality stainless steel  
 Track ball diameter: 38mm  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 2.10kg.  
 All languages version and interface are available on request.



#### Model Number: Rugged Keyboard KB005K

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 478mm x 135mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 No. of keys: 106keys, high quality stainless steel  
 Track ball diameter: 38mm  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 2.80kg.  
 All languages version and interface are available on request.



#### Model Number: Black Keyboard KB005KBL

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 478mm x 135mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 No. of keys: 106keys, high quality stainless steel  
 Track ball diameter: 38mm  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 2.50kg.  
 All languages version and interface are available on request.



**Model Number: Industrial Keyboard KB005K-DT (Desktop)**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 502mm x 164mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Desktop  
 No. of keys: 106keys, high quality stainless steel  
 Track ball diameter: 38mm  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 3.50kg.  
 All languages version and interface are available on request.



**Model Number: KB005L (Backlight keyboard)**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 392mm x 135mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 No. of keys: 83 keys, high quality stainless steel  
 Track ball diameter: 38mm  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 2.10kg.  
 All languages version and interface are available on request.



**Model Number: Metal Keyboard KB006**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 392mm x 135mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 No. of keys: 83 keys, high quality stainless steel  
 Touch pad  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 2.00kg.  
 All languages version and interface are available on request.



**Model Number: Metal Keyboard KB006-P**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 416mm x 159mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Panel mounting  
 No. of keys: 83 keys, high quality stainless steel  
 Touch pad  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 2.00kg.  
 All languages version and interface are available on request.



**Model Number: Metal Keyboard KB007 (Optical trackball)**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 392mm x 110mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 No. of keys: 64 keys, high quality stainless steel  
 Track ball diameter: 38mm  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 1.80kg.  
 All languages version and interface are available on request.




**Model Number: Metal Keyboard Kb008**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 295mm x 105mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 No. of keys: 64 keys, high quality stainless steel  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 1.50kg.  
 All languages version and interface are available on request.



**Model Number: Metal Keyboard KB008K**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 320mm x 105mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 No. of keys: 79 keys, high quality stainless steel  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 1.50kg.  
 All languages version and interface are available on request.

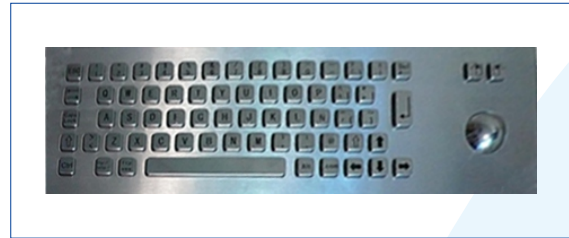

**Model Number: Panel Mount Keyboard KB010**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 400mm x 124mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Panel Mounting  
 No. of keys: 64 keys, high quality stainless steel  
 Track ball diameter: 38mm  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 1.80kg.  
 All languages version and interface are available on request.




#### Model Number: Metal Keyboard KB012

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 319mm x 135mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 No. of keys: 83 keys, high quality stainless steel  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 1.80kg.  
 All languages version and interface are available on request.




#### Model Number: Metal Keyboard KB015

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 420mm x 125mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 No. of keys: 83 keys, high quality stainless steel  
 Track ball diameter: 38mm  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 2.50kg.  
 All languages version and interface are available on request.

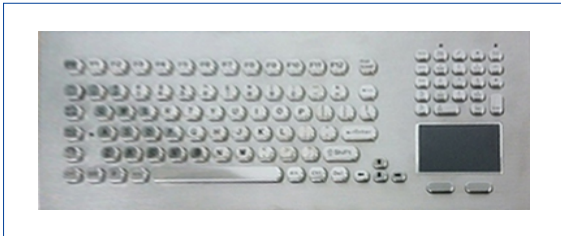

#### Model Number: Metal Keyboard with touchpad KB020

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 385mm x 180mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Panel Mounting  
 No. of keys: 104keys, high quality stainless steel  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 1.80kg.  
 All languages version and interface are available on request.

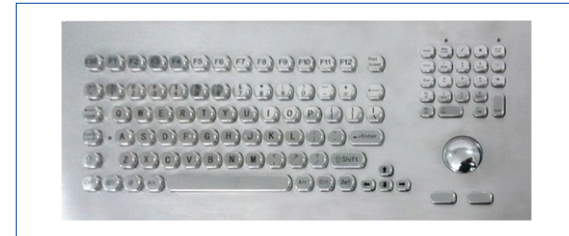

#### Model Number: Metal Keyboard with Trackball KB021

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 385mm x 180mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Panel Mounting  
 No. of keys: 104keys, high quality stainless steel  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 2.00kg.  
 All languages version and interface are available on request.





**Model Number: KB022 Metal Keyboard with Imported Cherry Switch**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 372mm x 102mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 No. of keys: 65 keys, high quality stainless steel  
 Track ball diameter: 38mm  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 1.80kg.  
 All languages version and interface are available on request.




**Model Number: Metal Keyboard KB200**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 330mm x 100mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 No. of keys: 71keys, high quality stainless steel  
 Track ball diameter: 25mm  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 1.8kgs  
 All languages version and interface are available on request.



**Model Number: Metal Keyboard KB205**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 330mm x 125mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 No. of keys: 86 keys, high quality stainless steel  
 Track ball diameter: 25mm  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 2.10kg.  
 All languages version and interface are available on request.

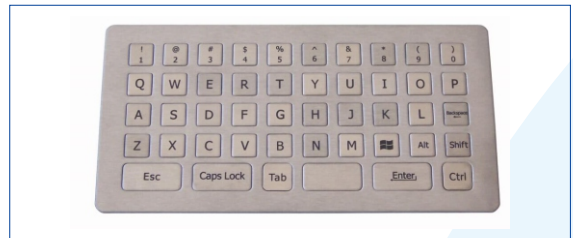

**Model Number: KB300 Metal Keyboard**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 190mm x 98mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Panel Mounting  
 No. of keys: 46 keys, high quality stainless steel  
 Etching and inking lettering  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 1kg.  
 All languages version and interface are available on request.



#### **Model Number: Industrial Keyboard KBCA1 (Desktop)**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 412mm x 124mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Desktop  
 No. of keys: 64 keys, high quality stainless steel  
 Track ball diameter: 38mm  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 3.30kg.  
 All languages version and interface are available on request.



#### **Model Number: Industrial Keyboard KBCA2 (Desktop)**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 412mm x 124mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Desktop  
 No. of keys: 64 keys, high quality stainless steel  
 Touch pad  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 3.20kg.  
 All languages version and interface are available on request.



#### **Model Number: Industrial Keyboard KBCA3 (Desktop)**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 412mm x 155mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Desktop  
 No. of keys: 83 keys, high quality stainless steel  
 Track ball diameter: 38mm  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 3.80kg.  
 All languages version and interface are available on request.



#### **Model Number: Industrial Keyboard KBCA4 (Desktop)**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 412mm x 155mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Desktop  
 No. of keys: 83 keys, high quality stainless steel  
 Touch pad  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 3.60kg.  
 All languages version and interface are available on request.



**Model Number: Stainless steel Keyboard KBCA6 (Desktop)**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 346mm x 175mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Desktop  
 No. of keys: 83 keys, high quality stainless steel  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 3.00kg.  
 All languages version and interface are available on request.



**Model Number: Metal Keypad KP901**

Stainless steel keypad ( Encryption Available )  
 Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: Matrix , USB or PS2 available  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 91.5mm x 87.5mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 No. of keys: 16keys, High quality stainless steel  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 0.70kg.  
 All languages version are available on request.



**Model Number: Metal Keypad KP902**

Encryption numeric keypad  
 Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: RS232 and USB or PS2 available  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 160mm x 102mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 No. of keys: 16keys, high quality stainless steel  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 0.75kg.  
 All languages version are available on request.



**Model Number: Metal Keypad with Trackball KP903**

Metal keypad with trackball  
 Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: RS232 and USB or PS2 available  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 196mm x 120mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 No. of keys: 16keys, high quality stainless steel  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 1.2kg.  
 All languages version are available on request.



**Model Number: Metal Keypad KP906**

Stainless steel keypad  
 Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: Matrix , USB or PS2 available  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 100mm x 66mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 No. of keys: 12keys, High quality stainless steel  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 0.4kg.  
 All languages version are available on request.



**Model Number: Metal Keypad KP912**

Encryption numeric keypad  
 Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: RS232 and USB or PS2 available  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 145mm x 100mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 No. of keys: 16keys, high quality stainless steel  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 0.75kg.  
 All languages are available on request.



**Model Number: Metal Keypad KP923**

Metal Numeric keypad  
 Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: RS232 and USB or PS2 available  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 160mm x 102mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Panel Mounting  
 No. of keys: 16keys, high quality stainless steel  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 0.75kg.  
 All languages version are available on request.



**Model Number: Metal Keypad KP924**

Metal Numeric keypad  
 Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: RS232 and USB or PS2 available  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 120mm x 90mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 No. of keys: 20keys, high quality stainless steel  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 0.75kg.  
 All languages version are available on request.





**Model Number: Kp927**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: Matrix, USB available  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 304mm x 216mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Panel Mounting  
 No. of keys: 16keys, high quality stainless steel  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 1.10kg.  
 All languages version and interface are available on request.




**Model Number: KP-MB1**

Numeric keypad  
 Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: Matrix , USB or PS2 available  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 79mm x 77mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 No. of keys: 16keys  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 0.25kg.  
 All languages version are available on request.



**Model Number: KP-MB2**

Numeric keypad  
 Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: Matrix , USB or PS2 available  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 70mm x 62mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 No. of keys: 12keys  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 0.25kg.  
 All languages version are available on request.

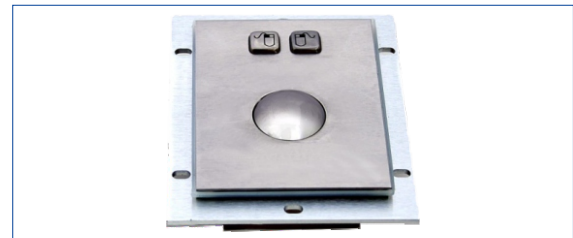

**Model Number: KT100 38mm Trackball**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C.  
 Storage temperature: -20C to +70C.  
 Dimensions: 110mm x 83mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 0.75kg.  
 Optional for Mechanical or Optical ball



**Model Number: KT100DT 38mm Trackball**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C.  
 Storage temperature: -20C to +70C.  
 Dimensions: 110mm x 83mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 0.75kg.  
 Optional for Mechanical or Optical ball



**Model Number: KT100-P 38mm Trackball**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C.  
 Storage temperature: -20C to +70C.  
 Dimensions: 134mm x 107mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Panel Mounting  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 0.75kg.  
 Optional for Mechanical or Optical ball




**Model Number: KT101 38mm Trackball with 3 mouse keys**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C.  
 Storage temperature: -20C to +70C.  
 Dimensions: 110mm x 83mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 0.75kg.  
 Optional for Mechanical or Optical ball



**Model Number: KWS001 (Back mount)**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C.  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 440mm x 220mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Back mount  
 No. of keys: 64 keys, high quality stainless steel  
 Track ball diameter: 38mm  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 3.50kg.  
 All languages version and interface are available on request.

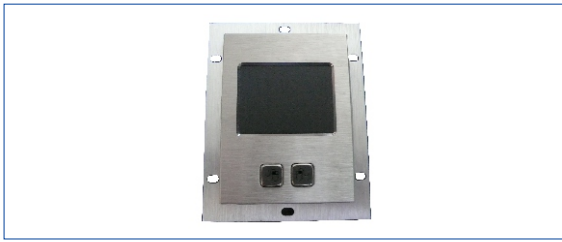


**Model: Metal touchpad KC300**

Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C.  
 Storage temperature: -20C to +70C.  
 Dimensions: 110mm x 83mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 0.75kg.  
 Optional for Mechanical or Optical ball



**Model Number: Metal Touchpad KC301**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C.  
 Storage temperature: -20C to +70C.  
 Dimensions: 80mm x 80mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 0.5kg.

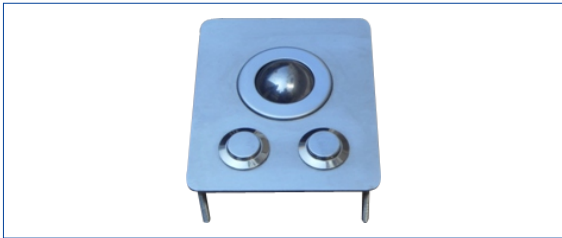

**Model Number: KT103 25mmTrackball with 2 mouse keys**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C.  
 Storage temperature: -20C to +70C.  
 Dimensions: 82mm x 67mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Panel Mounting  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 0.5kg.  
 Optional for Mechanical or Optical ball



**Model Number: KT105 25mmTrackball with 2 mouse keys**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C.  
 Storage temperature: -20C to +70C.  
 Dimensions: 80mm x 65mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 0.5kg.  
 Optional for Mechanical or Optical ball



**Model Number: KWS003 (Back mount)**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 440mm x 200mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Back mount  
 No. of keys: 83 keys, high quality stainless steel  
 Track ball diameter: 38mm  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 3.70kg.  
 All languages version and interface are available on request.



**Model Number: Mini Metal Keyboard MKB701**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 230mm x 87mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 No. of keys: 64 keys, high quality stainless steel  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 1.40kg.  
 All languages version and interface are available on request.



**Model Number: Mini Metal Keyboard MKB702**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 244mm x 104mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 No. of keys: 86 keys, high quality stainless steel  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 1.50kg.  
 All languages version and interface are available on request.



**Model Number: Mini Metal Keyboard with Trackball MKB703**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 300mm x 104mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 No. of keys: 86 keys, high quality stainless steel  
 Track ball: 25mm  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 1.60kg.  
 All languages version and interface are available on request.





**Model Number: Mini Metal Keyboard MKB704**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 370mm x 104mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 No. of keys: 106 keys, high quality stainless steel  
 Track ball: 25mm  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 2.20kg.  
 All languages version and interface are available on request.



**Model Number: Mini Metal Keyboard MKB705**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 293mm x 87mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 No. of keys: 66 keys, high quality stainless steel  
 Track ball: 25mm  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 1.40kg.  
 All languages version and interface are available on request.



**Model Number: Black Mini Metal Keyboard MKB705-BL**

Protection Level: IP65; NEMA4X  
 Lifespan: > 5 years.  
 Interface: PS2, USB available.  
 Supply Voltage: +5V DC +/-5%  
 Operating temperature: -10C to +60C  
 Storage temperature: -20C to +70C.  
 Panel dimensions: 293mm x 87mm  
 Dustproof, Water proof, Vandalism resistance  
 Mounting type: Rear Mounting  
 No. of keys: 66 keys, high quality stainless steel  
 Track ball: 25mm  
 Key switch Technology: Silicone switching element  
 Key switch lifetime: > 5 million of operations.  
 Actuation Force/travel: 1N/2.0mm  
 Mounting Rack: Aluminum alloy  
 Lettering: laser engraved legends for excellent durability  
 G.W.: 1.40kg.  
 All languages version and interface are available on request.




**Model Number: PK87TB**

87 keys, All layouts available  
 Key Lifetime:>10 millions actuations  
 Silkscreen key legend  
 Working voltage:5VDC,working current:<=100mA  
 Key Travel:2.2mm ± 0.5mm  
 Key actuation force:50 ± 10g  
 USB or PS2 interface  
 OS: DOS/Windows95/98/NT/ME/2000/2003/XP/Vista,Win7,  
 Linux, Unix, Mac OSX  
 Cable Length:1.5m  
 Operating temperature: 0~60° C  
 Size:400x133x13mm  
 Weight:0.75kg



**Model Number: Silicone Keyboard SK301**

- A specially designed industrial keyboard made by Inputel, washable, made of rigid silicone
- Rubberized surface provides comfortable use of typing
- Compatibility: Microsoft® Windows®7/Vista®/XP/2000/ME/98
- Language: All the languages compatible with Windows®
- Communication: USB2.0
- Key layout: 102 keys and 2 mouse buttons
- Dimensions: 445(L) x 180(W) x 20(T) mm
- Protection level: IP68
- Approvals: CE, FCC, RoHs & WEEE

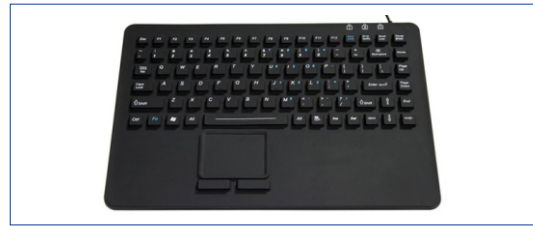

**Model Number: Silicone Keyboard SK302**

- A specially designed industrial keyboard made by Inputel, washable, made of rigid silicone
- Rubberized surface provides comfortable use of typing
- Compatibility: Microsoft® Windows®7/Vista®/XP/2000/ME/98
- Language: All the languages compatible with Windows®
- Communication: USB2.0
- Key layout: 99 keys
- Dimensions: 343(L) x 228(W) x 12(T) mm
- Protection level: IP68
- Approvals: CE, FCC, RoHs & WEEE



**Model Number: Silicone Keyboard SK303**

- A specially designed industrial keyboard made by Inputel, washable, made of rigid silicone
- Rubberized surface provides comfortable use of typing
- Compatibility: Microsoft® Windows®7/Vista®/XP/2000/ME/98
- Language: All the languages compatible with Windows®
- Communication: USB2.0
- Key layout: 87 keys
- Dimensions: 230(L) x 150(W) x 10(T) mm
- Protection level: IP68
- Approvals: CE, FCC, RoHs & WEEE




**Model Number: Medical Keyboard SK305**

- A specially designed industrial keyboard made by Inputel, washable, made of rigid silicone
- Rubberized surface provides comfortable use of typing
- Compatibility: Microsoft® Windows®7/Vista®/XP/2000/ME/98
- Language: All the languages compatible with Windows®
- Communication: USB2.0
- Key layout: 105 keys
- Dimensions: 442(L) x 140(W) x 12(T) mm
- Protection level: IP68
- Approvals: CE, FCC, RoHs & WEEE



**Model Number: Medical Keyboard SK307**

- A specially designed industrial keyboard made by Inputel, washable, made of rigid silicone
- Rubberized surface provides comfortable use of typing
- Compatibility: Microsoft® Windows®7/Vista®/XP/2000/ME/98
- Language: All the languages compatible with Windows®
- Communication: USB2.0
- Key layout: 98 keys
- Dimensions: 272(L) x 135(W) x 12(T) mm
- Protection level: IP68
- Approvals: CE, FCC, RoHs & WEEE

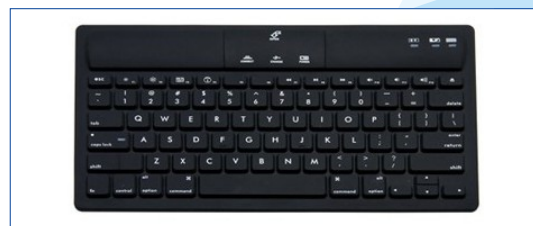

**Model Number: Bluetooth Keyboard SK307-WL**

- A specially designed industrial keyboard made by Inputel, washable, made of rigid silicone
- Rubberized surface provides comfortable use of typing
- Compatibility: Microsoft® Windows®7/Vista®/XP/2000/ME/98
- Language: All the languages compatible with Windows®
- Communication: Bluetooth
- Key layout: 98 keys
- Dimensions: 272(L) x 135(W) x 12(T) mm
- Protection level: IP68
- Approvals: CE, FCC, RoHs & WEEE




**Model Number:SK308**

- A specially designed industrial keyboard made by Inputel, washable, made of rigid silicone
- Rubberized surface provides comfortable use of typing
- Compatibility: Microsoft® Windows®7/Vista®/XP/2000/ME/98
- Language: All the languages compatible with Windows®
- Communication: USB2.0
- Key layout: 116 keys
- Dimensions: 346(L) x 136(W) x 12(T) mm
- Protection level: IP68
- Approvals: CE, FCC, RoHs & WEEE




**Model Number:SK309**

- A specially designed industrial keyboard made by Inputel, washable, made of rigid silicone
- Rubberized surface provides comfortable use of typing
- Compatibility: Microsoft® Windows®7/Vista®/XP/2000/ME/98
- Language: All the languages compatible with Windows®
- Communication: USB2.0
- Key layout: 87 keys
- Dimensions: 220(L) x 110(W) x 9(T) mm
- Protection level: IP68
- Approvals: CE, FCC, RoHs & WEEE

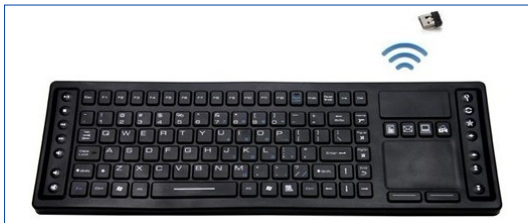


**Model Number:Wireless Keyboard SK310-WL**

- A specially designed industrial keyboard made by Inputel, washable, made of rigid silicone
- Rubberized surface provides comfortable use of typing
- Compatibility: Microsoft® Windows®7/Vista®/XP/2000/ME/98
- Language: All the languages compatible with Windows®
- Communication: 2.4G
- Key layout: 105 keys
- Dimensions: 418(L) x 133(W) x 16(T) mm
- Protection level: IP68
- Approvals: CE, FCC, RoHs & WEEE

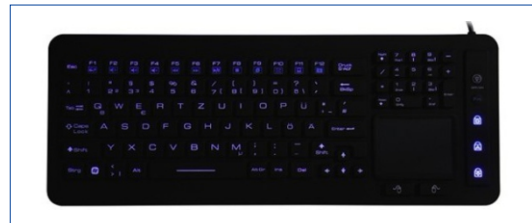


**Model Number:Backlit Keyboard SK311**

- A specially designed backlit industrial keyboard made by Inputel, washable, made of rigid silicone
- With keyboard ON/OFF switch
- Conveniently cleaning of flat membrane
- Rubberized surface provides comfortable use of typing
- Compatibility: Microsoft® Windows®7/Vista®/XP/2000/ME/98
- Language: All the languages compatible with Windows®
- Communication: USB2.0
- Key layout: 110 keys
- Dimensions: 388(L) x 148(W) x 15(T) mm
- Protection level: IP68
- Approvals: CE, FCC, RoHs & WEEE

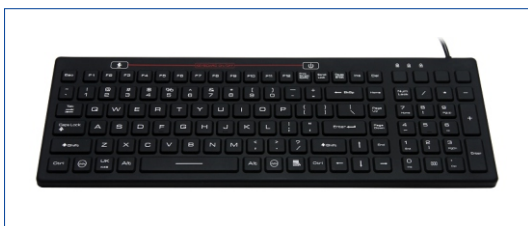

**Model Number:Waterproof Keyboard SK312**

- A specially designed industrial keyboard made by Inputel, washable, made of rigid silicone
- With keyboard ON/OFF switch
- Rubberized surface provides comfortable use of typing
- Compatibility: Microsoft® Windows®7/Vista®/XP/2000/ME/98
- Language: All the languages compatible with Windows®
- Communication: USB2.0
- Key layout: 100 keys
- Dimensions: 380(L) x 130(W) x 10(T) mm
- Protection level: IP68
- Approvals: CE, FCC, RoHs & WEEE

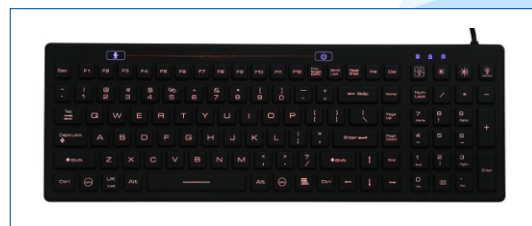

**Model Number:Backlit Keyboard SK312-BI**

- A specially designed backlit industrial keyboard made by Inputel, washable, made of rigid silicone
- With keyboard power and backlit ON/OFF switch
- Rubberized surface provides comfortable use of typing
- Compatibility: Microsoft® Windows®7/Vista®/XP/2000/ME/98
- Language: All the languages compatible with Windows®
- Communication: USB2.0
- Key layout: 100 keys
- Dimensions: 380(L) x 130(W) x 10(T) mm
- Protection level: IP68
- Approvals: CE, FCC, RoHs & WEEE




**Model Number:SK313**

- A specially designed industrial keyboard made by Inputel, washable, made of rigid silicone
- With keyboard ON/OFF switch
- Conveniently cleaning of flat membrane
- Rubberized surface provides comfortable use of typing
- Compatibility: Microsoft® Windows®7/Vista®/XP/2000/ME/98
- Language: All the languages compatible with Windows®
- Communication: USB2.0
- Key layout: 100 keys
- Dimensions: 388(L) x 138(W) x 13(T) mm
- Protection level: IP68
- Approvals: CE, FCC, RoHs & WEEE



**Model Number:SK313-BI**

- A specially designed backlit industrial keyboard made by Inputel, washable, made of rigid silicone
- With keyboard ON/OFF switch
- Conveniently cleaning of flat membrane
- Rubberized surface provides comfortable use of typing
- Compatibility: Microsoft® Windows®7/Vista®/XP/2000/ME/98
- Language: All the languages compatible with Windows®
- Communication: USB2.0
- Key layout: 100 keys
- Dimensions: 388(L) x 138(W) x 13(T) mm
- Protection level: IP68
- Approvals: CE, FCC, RoHs & WEEE

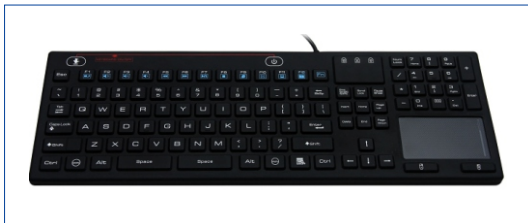


**Model Number:Medical Keyboard with touchpad SK314**

- A specially designed industrial keyboard made by Inputel, washable, made of rigid silicone
- With keyboard ON/OFF switch
- Rubberized surface provides comfortable use of typing
- Compatibility: Microsoft® Windows®7/Vista®/XP/2000/ME/98
- Language: All the languages compatible with Windows®
- Communication: USB2.0
- Key layout: 118 keys
- Dimensions: 409(L) x 139(W) x 11(T) mm
- Protection level: IP68
- Approvals: CE, FCC, RoHs & WEEE




**Model Number:Silicone Keyboard with touchpad SK315**

- A specially designed industrial keyboard made by Inputel, washable, made of rigid silicone
- With keyboard power ON/OFF switch
- Rubberized surface provides comfortable use of typing
- Compatibility: Microsoft® Windows®7/Vista®/XP/2000/ME/98
- Language: All the languages compatible with Windows®
- Communication: USB2.0
- Key layout: 102 keys
- Dimensions: 298(L) x 213(W) x 11(T) mm
- Protection level: IP68
- Approvals: CE, FCC, RoHs & WEEE

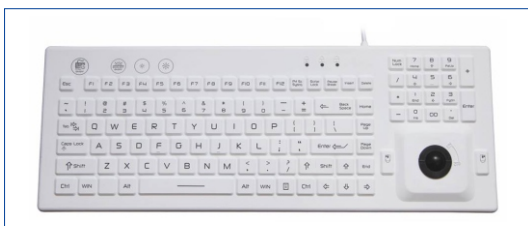

**Model Number:Medical Keyboard with Trackball SK319BL**

- A specially designed backlit keyboard with trackball, rigid and rugged, waterproof and washable, made of silicone
- 4-step brightness of backlight
- With Keyboard main power and backlight ON/OFF switch
- trackball provides convenient mouse function
- Rubberized surface provides comfortable use of typing
- Compatibility: Microsoft Windows7/8/10/Vista/XP/2000/ME/98
- Language: All the languages compatible with Windows
- Communication: USB1.1
- Key layout: 106 keys
- Dimensions: 390(L) x 140(W) x 15(T) mm
- Protection level: IP68

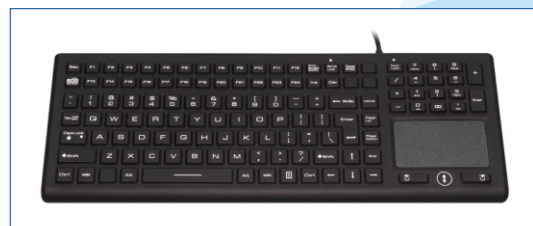

**Model Number:Rugged Silicone Keyboard SK321**

- A industrial keyboard with touchpad, rigid and rugged, waterproof and washable, made of silicone
- 24 functional keys F1 ~ F24
- Keyboard main power ON/OFF switch
- Rubberized surface provides comfortable use of typing
- Compatible with Microsoft® Windows® 10, 8, 7, Vista® & XP
- Language: All the languages compatible with Windows®
- Interface: USB 1.1
- Dimensions: 368(L) x 135(W) x 13(T) mm
- Touchpad working area: 70(W) x 40(H) mm
- Net weight: 710 g
- Protection level: IP68
- Approvals: CE, FCC & RoHS






**Model Number: Sm501 Waterproof optical Mouse**

- A stylish design and comfortable shape, rugged and waterproof, made of silicone
- Precise and smooth cursor movement, superior performance
- Rubberized surface provides comfort to user
- 800 dpi optical sensor with 3000 frames/second scan rate
- Compatibility: Microsoft Windows7/Vista/XP/2000/ME/98
- Communication: USB
- Button layout: Left &right buttons and scroll wheel performed by 3 buttons
- Dimension: 130x80x48mm
- Net weight:180g
- Colors: Solid, translucent and any custom colors
- Approvals: CE ROHS FCC



**Model Number: Sm502 Silicone Laser Mouse**

- A stylish design and comfortable shape, rugged and waterproof, made of silicone
- Precise and smooth cursor movement, superior performance
- Rubberized surface provides comfort to user
- 1200 dpi laser sensor with 3000 frames/second scan rate
- Compatibility: Microsoft Windows7/Vista/XP/2000/ME/98
- Communication: USB
- Button layout: Left &right buttons and scroll wheel performed by 3 buttons
- Dimension:115x68x42mm
- Net weight:155g
- Colors: Solid, translucent and any custom colors
- Approvals: CE ROHS FCC

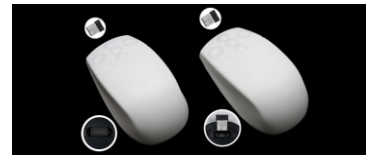

**Model Number: SM502-WL Wireless laser Mouse**

- A wireless laser mouse, rugged and waterproof, made of silicone
- 2.4GHz digital radio frequency technology
- Automatic synchronization between keyboard and receiver
- Working distance up to 10 meters
- rubberized surface provides comfort to user
- Precise and smooth cursor movement, superior performance
- 1200 dpi laser sensor with 3000 frames/second scan rate
- Compatibility: Microsoft Windows7/Vista/XP/2000/ME/98
- Communication: Mini USB receiver
- Button layout: Left&right buttons,scroll wheel performed by 3 buttons
- Dimension:114x65x41mm
- Net weight:95g



**Flexible Waterproof Silicone Keyboard FSK85**

- A mini size flexible keyboard, waterproof, washable, roll-up, made of silicone
- Compatibility: Microsoft Windows7/Vista/XP/2000/ME/98
- Language: All the languages compatible with Windows
- Communication: USB1.1, PS/2 & USB+PS/2
- Key layout: 85 keys
- Dimensions: 350(L) x 138(W) x 12(T) mm



**Full Size Flexible Keyboard FSK108**

- A full size flexible keyboard, waterproof, washable, roll-up, made of silicone
- Compatibility: Microsoft Windows7/Vista/XP/2000/ME/98
- Language: All the languages compatible with Windows
- Communication: USB1.1, PS/2 & USB+PS/2
- Key layout: 108 keys
- Dimensions: 495(L) x 138 (W) x 12(T) mm




**Wireless Health Glass keyboard WGKB01**

- weight:0.87kg
- Dimension:436x160x20mm
- Interface:USB Bluetooth&RF via Dongle
- Material:Tempered Glass+Rugged ABS case
- Color:Medical white
- Key size:18x18mm
- Touchpad Size:119x102mm
- Box Dimension:470x196x48mm
- Carton:50x40x30cm 10pcs/carton
- Carton GW:17.5KGS



**Bluetooth Glass keyboard WGKB02**

- Material:Tempered Glass +Aluminium Alloy
- Keyboard,Mouse and touchpad are three major functions
- Surface waterproof, Easy to clean
- Material:Tempered Glass+Rugged ABS case
- Color:Silver with Gray
- Two modes:Bluetooth and USB
- Wireless type:Bluetooth 3.0
- Battery Capacity:1040mAh
- Power consumption:25mA
- Support system:
  - Windows, Mac OSX,
  - Android (Only support keyboard and mouse, do not support gesture)
  - iOS( only support keyboard , do not support gesture and mouse)

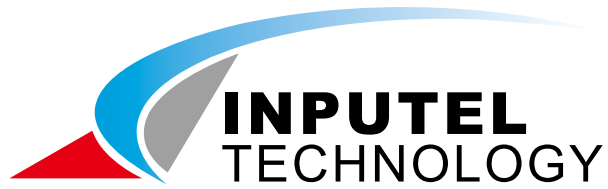

公司网站 web: [www.inputel.com](http://www.inputel.com)

公司地址 Address: NO14 Tianbao Road Yingrenshi  
Shiyan Bao'an shenzhen China 518108

公司电话 Tel:8675527622290 Email:[sales@inputel.com](mailto:sales@inputel.com)