M700DM9

7-inch ARM A73 + A53 Rugged Android Tablet



KEY FEATURES

- 7 inch android tablet, 1280 x 720 TFT Panel with direct optical bonding
- IP65 waterproof and dustproof
- 4 GB RAM + 64 GB eMMC
- Rated for extreme temperature use
- Supports Android 11.0 OS, Sunlight readable android tablet



SPECIFICATIONS


Display

Resolution 1280x720 Size 7.0 inches Contrast Ratio 800:1 Panel Brightness 650 nits View Angles 80,80,80,80 Type Projected Capacitive Multi Touch Touch Mode Support Hand / Gloves and Rain Mode Bonding Optical Bonding for Sunlight Viewa System Specification	
View Angles 80,80,80,80 Type Projected Capacitive Multi Touch Touch Mode Support Hand / Gloves and Rain Mode Bonding Optical Bonding for Sunlight Viewa System Specification	
Touch Mode Support Hand / Gloves and Rain Mode Bonding Optical Bonding for Sunlight Viewal System Specification	
System Specification	
	bility
ADM 470 / 4 (0.0 OH) / 450 / 4 (0.0 OH)	
Processor ARM A73 x 4 (2.0 GHz) + A53 x 4 (2.0 GHz) Memory 4GB	
Storage 64GB Operating System Android 11.0	
WLAN Support BT Support	
WWAN 4G/LTE (Optional) GNSS GPS/GLONASS	
RFID NFC (Read / Write, Peer to Peer mode) (Optional) Sensors Ambient Light Sensor, E-Compass Acceleration Sensors	, Gyro,
Camera	
Front Camera 8MP Camera Rear Camera 13MP Camera with LED Auxiliary L	ight (Auto Focus)
Mechanical	
Dimension 212.4 x 132.8 x 19 mm Weight 550g	
IO Ports	
USB Port 1 x USB Type C OTG SD Card Slot 1 x Micro SD Card Slot	
SIM Card Slot 1 x Micro SIM Card Slot Audio 1 x Audio Combo connector (Mic in 2 x Built-in Mic 1 x Speaker 1 x Earphone	n and Line Out)
Indicator 2 x LED Indicators (Power, Battery) Docking Connector 1 x Docking Connector	
Environment	
Operating Humidity5% to 95% RH, Non-CondensingOperating Temperature-10°C to 50°C (Battery mode)-20°C to 60°C (Charging mode)	
Storage -30°C to 70°C Shock MIL-STD-810H Method 516.8 Proc Temperature	edure I
Vibration MIL-STD-810H Method 514.8 Procedure I IP rating IP65	
Drop MIL-STD-810H Method 516.8, 5 ft	

Control Button	1 x Volume + ,1 x Volume - , 1 x Power Button, 1 x Home Button, 1 x Menu Button, 1 x Return Button, 1 x Trigger Button		
Button	Home Button, 1 x Menu Button, 1 x Return Button, 1		
	x mggci batton		
Power			
Battery	3.7V 5300mAh Warm swappable function (Optional)	Battery Operating Time	20Hr
Power Rating	DC 5V	Adapter	Input: 100V-240V AC Output: DC 5V 3A
Security Function			
SOTI MobiControl	SOTI MobiControl Compliance		
Accessory			
Accessory	Universal Adapter x1 Battery x1	Optional Accessory	USB Type-C Cable x1 Battery Charging Dock Vehicle Dock (Charging + Connectors) Vehicle Dock (Charging Only) Desk Dock Hand Strap Micro SD Card Capacitive Touch Stylus Vehicle Adapter HDMI Adapter
Barcode Scanner			

Barcode Scanner 1D/2D Barcode Reader (Optional)

DIMENSIONS UNIT:MM

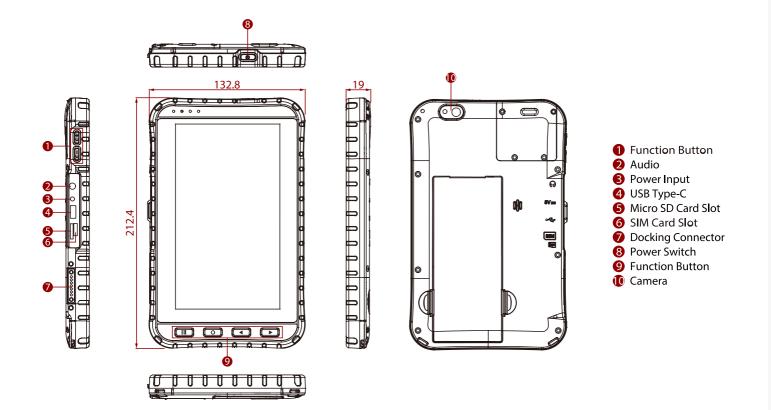

NOTE

- 1. Total usable memory will be less dependent upon actual system configuration.
- 2. SOTI is available upon request.
- 3. Length measurements do not include protrusions.
- 4. The drop test with a high-capacity battery must come with a hand strap.
- 5. Measured at dimming LCD brightness. Varies depending on the usage conditions, or when an external device is attached.
- 6. Accessories and integrated options may vary depending on your configuration.
- 7. This is a simplified drawing and some components are not marked in detail.
- 8. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.