


# COM-ADNC6

COM Express Type 6 Compact Size with Intel Atom® X Series/N-series/Core™ i3 Processors

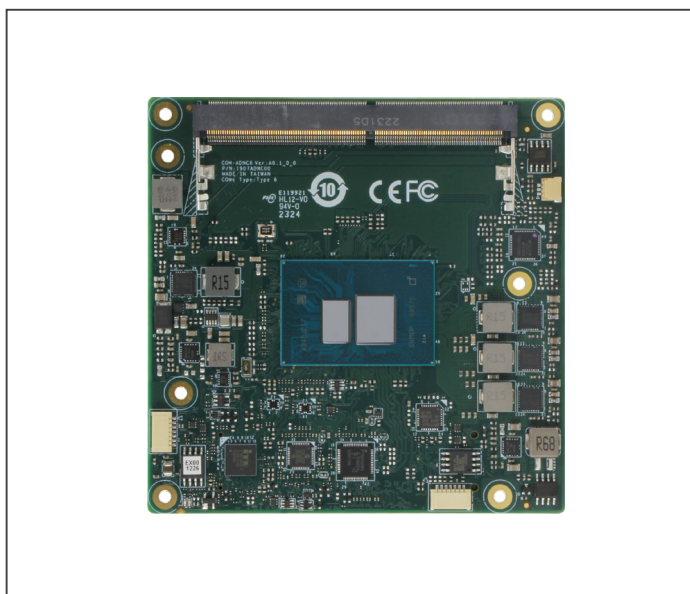

## Features

- Intel Atom® X Series/N-series/Core™ i3-N305 CPU, max TDP 15W
- DDR5 SODIMM x 1, up to 16GB (non-ECC)
- Intel® I226-V/I226-IT Gigabit Ethernet x 1
- SATA 6Gb/s x 2
- USB 2.0 x 8, USB 3.2 Gen 2 x 2
- PCIe [x4] (PCIe [x1] x 4 or [x2] x 2), Up to 4 PCIe devices
- COM Express Type 6, Compact size, 95 x 95mm



## Specifications

System	
Form Factor	COM Express Type 6, Compact Size
CPU	Intel Atom® X Series/N-series/Core™ i3-N305 CPU Intel® Core™ i3-N305 (8C, up to 3.8 GHz, 15W) Intel Atom® x7425E (4C, up to 3.4 GHz, 12W) Intel Atom® x7211E (2C, up to 3.2 GHz, 6W) Intel® Processor N97 (4C, up to 3.6 GHz, 12W) Intel® Processor N50 (2C, up to 3.4 GHz, 6W)
Chipset	Integrated with Intel® SoC
Memory	DDR5 SODIMM Socket x1, non-ECC, up to 16GB, 4800MT/s
Onboard Storage	—
BIOS	AMI BIOS (UEFI)
Wake on LAN	Yes
Watchdog Timer	255 Levels
Dimension	3.74" x 3.74" (95mm x 95mm)
Security	TPM 2.0
Power	
Power Requirement	+12V and +5VSB for ATX, +12V for AT
Power Type	AT (default)/ATX, switch by BIOS
Power Consumption (Typical)	Intel® Core™ i3-N305, 1.57A @+12V
Display	
Graphics Controller	Intel® UHD Graphics for 12th Gen Intel® Processors
Video Output	3 Displays: 18/24-bit Single/Dual-Channel LVDS/eDP x 1, up to 1920 x 1080/ 3840 x 2160 DP x 2, up to 3840 x 2160, 144Hz
I/O	
Ethernet	Intel® I226-V or I226-IT 2.5GbE x 1
Audio	High Definition Audio Interface
USB Port	USB 2.0 x 8, USB 3.2 Gen 2 x 2
Serial Port	2-Wire UART x 2 (Tx/Rx)
HDD Interface	SATA 6Gb/s x 2
Expansion	PCIe [x1] x 4 or [x2] x 2, LPC, WDT, HWM
GPIO	8-bit
SMBus/I2C	I2C x 1, SMBus x 1
Environment	
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C) WiTAS 2: -40°F ~ 185°F (-40°C ~ 85°C) on selected CPU SKU
Storage Temperature	-40°F ~ 185°F (-40°C ~ 85°C)
Operating Humidity	0% ~ 90% relative humidity, non-condensing
EMC	CE/FCC Class A
OS Support	Windows® 10 (64-bit) Linux Ubuntu 22.04.02/Kernel 5.19
Weight	0.25 lb. (0.12Kg)


## Packing List

- COM-ADNC6 x 1


## Optional Accessories

Part Number	Description
COM-ADNC6-FAN01	Cooler.95*95*29mm.4pin
COM-ADNC6-HSK01	Heat sink.AI.95x95x34mm.Silver
ECB-920A-A11-0001	COMe Type 6/10.Carrier Board.ATX.2.5GbE.8USB.2COM.4SATA.PCIe.AT/ATX. Rev.A1.1

## Block Diagram Unit: mm

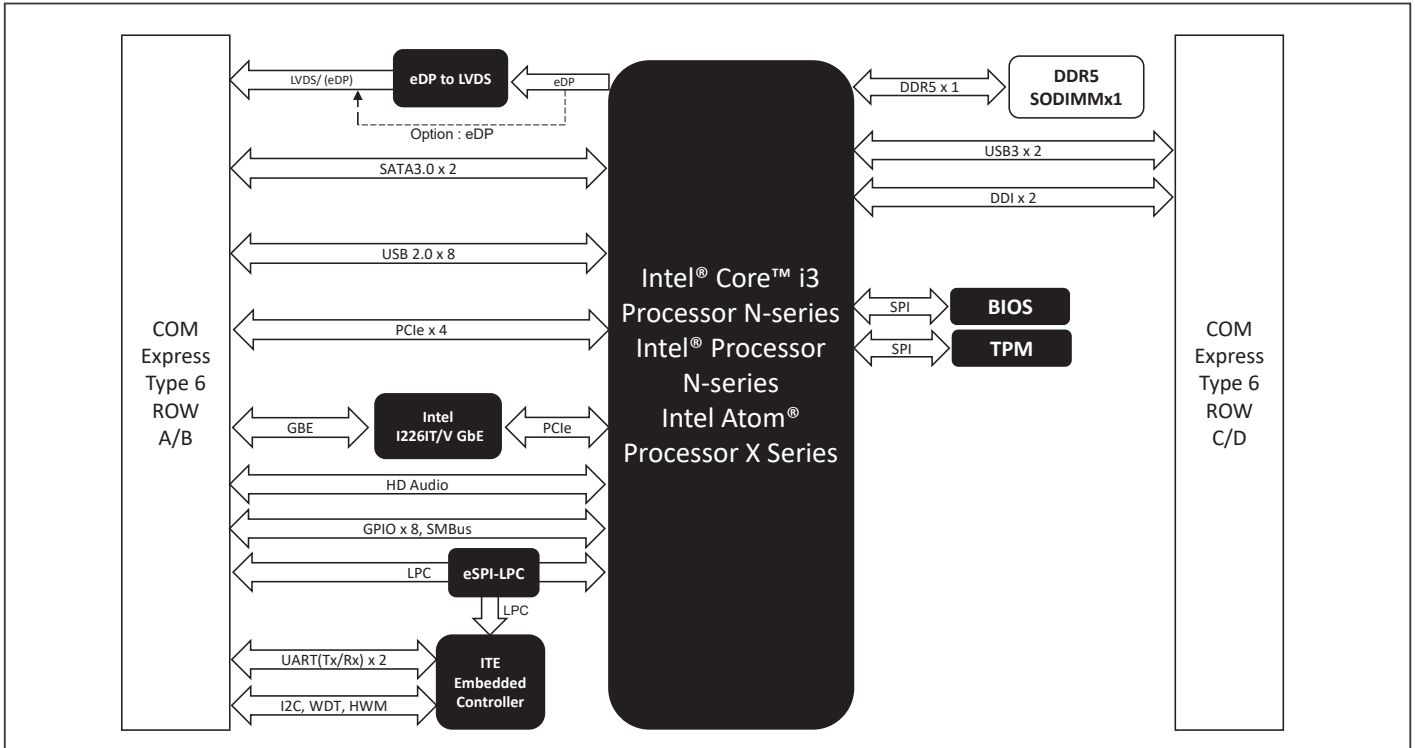

## Dimension Unit: mm

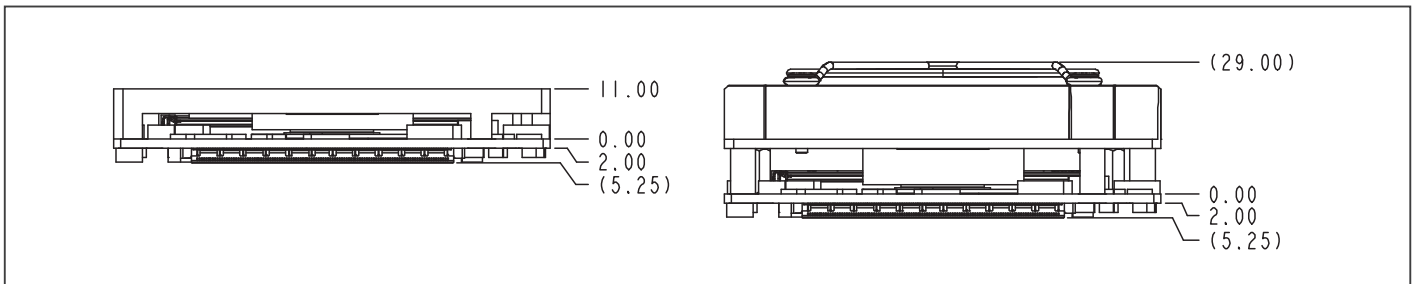

## Ordering Information

Part Number	COM Express Type	CPU	Memory	ECC support	Display	LVDS	Storage	LAN	USB	UART	Expansion	Power	Temperature	Others
COM-ADNC6-A10-0001	Type 6	Intel® Core™ i3-N305	DDR5 SODIMM x 1	—	LVDS x 1, DDI x 2	18/24bits 2CH LVDS	SATA 6Gb/s x 2	Intel® I226-V x 1	USB 2.0 x 6, USB 3.2 Gen 2 x 2	2-Wire UART x 2 (Tx/Rx)	PCIe x4 lanes (x1)*4 or (x2)*2	12V	0°C ~ 60°C	LPC, GPIO 8-bit, I2C, SMBus
COM-ADNC6-A10-0002	Type 6	Intel® Processor N97	DDR5 SODIMM x 1	—	LVDS x 1, DDI x 2	18/24bits 2CH LVDS	SATA 6Gb/s x 2	Intel® I226-V x 1	USB 2.0 x 6, USB 3.2 Gen 2 x 2	2-Wire UART x 2 (Tx/Rx)	PCIe x4 lanes (x1)*4 or (x2)*2	12V	0°C ~ 60°C	LPC, GPIO 8-bit, I2C, SMBus
COM-ADNC6-A10-0003	Type 6	Intel® Processor N50	DDR5 SODIMM x 1	—	LVDS x 1, DDI x 2	18/24bits 2CH LVDS	SATA 6Gb/s x 2	Intel® I226-V x 1	USB 2.0 x 6, USB 3.2 Gen 2 x 2	2-Wire UART x 2 (Tx/Rx)	PCIe x4 lanes (x1)*4 or (x2)*2	12V	0°C ~ 60°C	LPC, GPIO 8-bit, I2C, SMBus
COM-ADNC6-A10-0004	Type 6	Intel Atom® x7425E	DDR5 SODIMM x 1	—	eDP x 1, DDI x 2	—	SATA 6Gb/s x 2	Intel® I226-V x 1	USB 2.0 x 6, USB 3.2 Gen 2 x 2	2-Wire UART x 2 (Tx/Rx)	PCIe x4 lanes (x1)*4 or (x2)*2	12V	0°C ~ 60°C	LPC, GPIO 8-bit, I2C, SMBus
COM-ADNC6W2-A10-0001	Type 6	Intel® Core™ i3-N305	DDR5 SODIMM x 1	—	LVDS x 1, DDI x 2	18/24bits 2CH LVDS	SATA 6Gb/s x 2	Intel® I226-IT x 1	USB 2.0 x 6, USB 3.2 Gen 2 x 2	2-Wire UART x 2 (Tx/Rx)	PCIe x4 lanes (x1)*4 or (x2)*2	12V	-40°C ~ 85°C	LPC, GPIO 8-bit, I2C, SMBus