

Apacer

The Most **Reliable**
Storage For Industries

UV110-UFM3 with Housing



UV110-UFM3 with Housing

Overview

Apacer's UV110-UFM3 is a high performance, embedded solid state drive (SSD) designed to replace a conventional IDE hard disk drive. As an embedded flash storage, UV110-UFM3 is compliant with USB2.0 and backward compliant with USB1.1 interface. Utilizing 3D NAND for capacity up to 256GB and providing more power efficiency than 2D NAND, UV110-UFM3 can be plugged into a standard Embedded USB connector commonly found in desktops, portable PC systems and industrial PC systems. Regarding reliability, UV110-UFM3 is implemented with LDPC (Low Density Parity Check) ECC engine to increase data reliability.



In terms of flash management, UV110-UFM3 adopts the latest page mapping file translation layer and comes with various implementations including power saving modes, wear leveling, flash block management, power failure management, S.M.A.R.T., Hyper Cache technology and SMART Read Refresh™. With cost-effective design, better performance and increased reliability, UV110-UFM3 is well suited for embedded flash storage applications offering new and expanded functionality.


Feature

- Adopts advanced LDPC ECC engine with 3D NAND flash memory to improve reliability
- Global Wear Leveling
- Flash bad-block management
- Flash Translation Layer: Page Mapping
- S.M.A.R.T.
- Hyper Cache Technology
- SMART Read Refresh™
- Write Protect (Optional)

Specifications

| | |
|--|---|
| Model | UV110-UFM3 with Housing |
| Interface | USB 2.0 |
| Connector | 10-pin (2x5) female header in 2.54mm |
| Form Factor | USB Disk Module |
| NAND Flash Type | 3D TLC |
| Capacity | 128GB~256GB |
| External DRAM | No |
| Sustained Read Performance (MB/sec) | Up to 37 |
| Sustained Write Performance (MB/sec) | Up to 31 |
| ECC Engine | Low-Density Parity-Check (LDPC) Code |
| IOPS (4K Random Write) | 400 |
| Standard Operating Temperature (°C) | 0 ~ + 70 |
| Extended Operating Temperature (°C) | -40 ~ + 85 |
| Storage Temperature (°C) | -55 ~ + 100 |
| Housing | Yes |
| H/W Write Protect | Optional |
| Screw Hole | No |
| Shock | Operation: Acceleration, 50(G)/11(ms)/half sine (compliant with MIL-STD-202G) Non-operation: Acceleration, 1500(G)/0.5(ms)/half sine (compliant with MIL-STD-883K) |
| Vibration | Operation: 7.69 Grms, 20~2000 Hz/random (compliant with MIL-STD-810G) Non-operation: 4.02 Grms, 15~2000 Hz/random (compliant with MIL-STD-810G) |
| Operating Voltage | 5.0 V ± 5% |
| Power Consumption | Active mode: 100 mA; Idle mode: 75 mA |
| Dimension (L x W x H) | 35.70 x 28.10 x 7.20 (mm) |
| MTBF (hours) | >3,000,000 |

Mechanical Specification

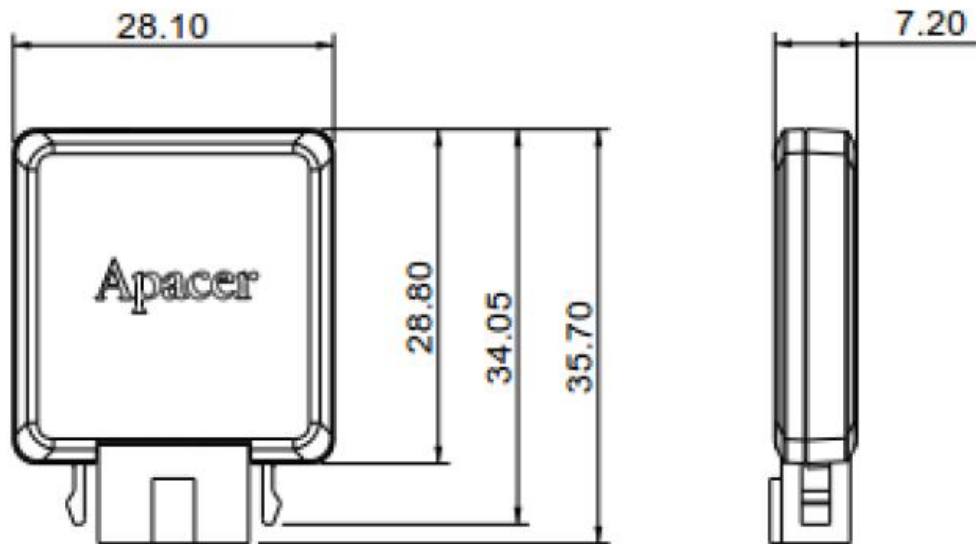

For more information,
contact your Apacer representative

Global Presence

Taiwan (Headquarters)
Apacer Technology Inc.
Tel: +886-2-2267-8000
Fax: +886-2-2267-2261

Europe
Apacer Technology B.V.
Tel: +31-40-267-0000
Fax: +31-40-290-0686

U.S.A.
Apacer Memory America, Inc.
Tel: +1-408-518-8699
Fax: 1-510-249-9551

Shanghai
Apacer Electronic(Shanghai)
Co., Ltd.
Tel: +86-21-6228-9939

Japan
Apacer Technology Corp.
Tel: +81-3-5419-2668
Fax: +81-3-5419-0018

India
Apacer Technologies Pvt. Ltd.
Tel: +91-80-41529061~3
Fax: +91-80-41700215