


# ROM-5721

## NXP i.MX8M Mini Cortex®-A53 SMARC 2.0/2.1 Computer-on-Module

NEW

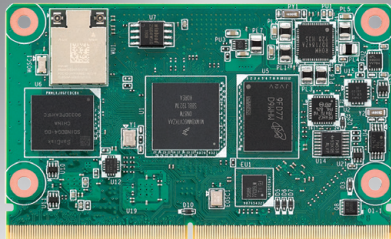

### Features

- NXP i.MX 8M Mini processor with up to 4 Arm Cortex A53 cores
- 1 x Arm Cortex-M4 cores
- Onboard LPDDR4 memory and eMMC
- 1 x 4 lane MIPI-CSI, 1 x Dual channel LVDS or 1 x Display Port
- 4 x USB2.0, 1 x USB 2.0 OTG, 4 x UART, 4 x I2C, 12 x GPIO, 1 x PCIe2.0, 1x Gigabit LAN
- Support OpenGL ES 2.0/1.1 by hardware accelerators
- Low power consumption design
- Support Linux and Android BSP



### Introduction

Advantech ROM-5721 SMARC 2.0/2.1 Computer-on-Module is powered by NXP i.MX8M Mini SOC which includes up to 4 Arm Cortex-A53 cores in combination with one Cortex-M4 real time processor and Vivante GC320 , GC NanoUltra 3D graphics engine. It provides USB2.0, Gigabit Ethernet, MIPI-CSI, PCI Express, Dual channel LVDS shared with MIPI-DSI for embedded applications.


ROM-5721 is paired with Advantech ROM-DB5901 carrier board for faster end product peripheral integration and time-to-market. The reference schematics and layout checklists documentations for carrier board development will be provided along with the open-sourced Linux BSP, test utilities, hardware design utilities and reference drivers.



### Specifications

Form Factor		SMARC2.0 & SMARC2.1 compliance
Processor System	CPU	NXP i.MX 8M Mini up to 4 Arm Cortex A53 cores, up to 1.8GHz
	MCU	1 x Arm Cortex-M4 core
Memory	Technology	LPDDR4-1866
	Capacity	Onboard 1GB/2GB LPDDR4
	Flash	8/16 GB eMMC NAND Flash for O.S. and 8 MB QSPI NOR Flash for board information
Graphics	LVDS/MIPI DSI	1 x 4 lane MIPI-CSI, 1 x Dual channel LVDS or 1 x Display Port up to 1080P
	HDMI	-
	Parallel RGB	-
	VGA	-
	Graphics Engine	Vivante GC320, GC NanoUltra 3D GPU Support OpenGL ES 2.0, VG 1.1
Ethernet	H/W Video Codec	Decoder: H.265, H.264, VP8/9 1080p Encoder:H.264, VP8 1080p
	Chipset	1 x NXP i.MX8M Mini GbE controller
RTC	Speed	10/100/1000 Mbps
	RTC	Yes
WatchDog Timer		Yes
Security		TPM 2.0
I/O	PCIe	1 x PCIe 2.0
	SATA	-
	USB	4 USB 2.0 1 USB 2.0 OTG
	Audio	2 x I <sup>2</sup> S
	SPDIF	-
	SDIO	1
	Serial Port	2 x 4-wire UART and 2 x 2-wire UART
	SPI	2
	CAN	-
	GPIO	12
	I <sup>2</sup> C	4
	Camera Input	1 x 4-lane MIPI CSI
	System Bus	-
	Touch	-
Keypad	-	
Power	Power Supply Voltage	Fixed 5V DC source and allow 3.3 V ~ 5.25 V operates directly from single level Lithium Ion cells
	Power Consumption	3.45W*
Environment	Operating Temperature	0 ~ 60 °C/ -40 ~ 85 °C
	Operating Humidity	5 ~ 95% relative humidity, non-condensing
Mechanical	Dimensions (W x D)	82 x 50 mm
Operation System		Linux & Android
Certifications		CE/FCC Class B

## Block Diagram

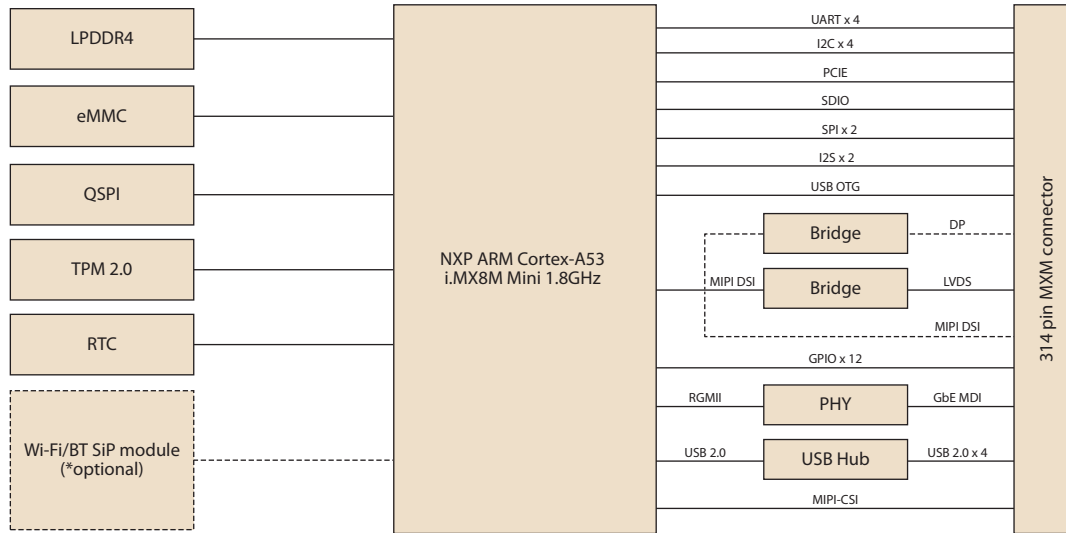

## Ordering Information

Part No.	CPU	Memory	Flash Memory	UART	LAN	USB 2.0	Display	PCIe	SD	I2S	I2C	SPI	WiFi/BT	Size	Power input	Operating Temperature
ROM-5721CQ-REA2E	i.MX8M Mini Quad	2GB	16GB	4	1	5	1 x Dual ch LVDS	1	1	2	4	2	-	82 x 50 x 5 mm	3 ~ 5.25V	0 ~ 60 °C
ROM-5721CD-RDA2E	i.MX8M Mini Dual	1GB	8GB	4	1	5	1 x MIPI DSI	1	1	2	4	2	-	82 x 50 x 5 mm	3 ~ 5.25V	0 ~ 60 °C
ROM-5721CS-RDA2E	i.MX8M Mini Solo	1GB	N/A	4	1	1	1 x MIPI DSI	1	1	2	4	2	-	82 x 50 x 5 mm	3 ~ 5.25V	0 ~ 60 °C
ROM-5721WQ-QEA2E	i.MX8M Mini Quad	2GB	16GB	4	1	5	1 x Dual ch LVDS	1	1	2	4	2	-	82 x 50 x 5 mm	3 ~ 5.25V	-40 ~ 85 °C
ROM-5721WD-QDA2E	i.MX8M Mini Dual	1GB	8GB	4	1	5	1 x MIPI DSI	1	1	2	4	2	-	82 x 50 x 5 mm	3 ~ 5.25V	-40 ~ 85 °C
ROM-5721WS-QDA2E	i.MX8M Mini Solo	1GB	N/A	4	1	1	1 x MIPI DSI	1	1	2	4	2	-	82 x 50 x 5 mm	3 ~ 5.25V	-40 ~ 85 °C

\*QUAD-Lite/DUAL-Lite/SOLO-Lite SoC, DRAM and eMMC of other capacity are available through project-based support. Please contact sales for details.

## Development Board

Part No.	Description
ROM-DB5901-SWA1	Development Board for SMARC 2.0 Module

## OS Specification

Operating System	Version Support
Linux	Yocto 2.5
Android	Android 9.0

Please visit <https://advt.ch/aim-linux-download> to know our latest software update


## Optional Accessories

Part No.	Description
1701100300	Debug port cable for ROM-5721
1700019474	D-SUB 9P(F)/D-SUB 9P(F) RS232/RS485 100c
1970005258N001	Heat Spreader
1970005259T001	Semi Heat Sink (0 ~ 60 °C)
1970005260T001	Semi Heat Sink (-40 ~ 85 °C)
193B021490	Screw for Heat Spreader and Semi Heat Sink
96PSA-A36W12R1-3	ADAPTER 100-240V 36W 12V 3A
1700001524	Power Cord 3P UL 10A 125V 180cm
170203183C	Power Cord 3P Europe (WS-010+WS-083) 183cm
170203180A	Power Cord 3P UK 2.5A/3A 250V 1.83M
1700008921	Power Cord 3P PSE 183cm
SQF-ISDM1-16G-21C	SQF SD Card I-SD UHS-I MLC 16G (0~70°C)
SQF-ISDM1-16G-21E	SQF I-SD UHS-I MLC 16G (-40~85°C)
EWM-W163M201E	802.11 a/b/g/n/ac,QCA6174A,2T2R,w/BT4.1,M.2 2230
1750008717-01	Dipole Ant. D.B 2.4/5G WIFI 3dBi SMA/M-R BLK
1750007965-01	Antenna Cable R/P SMA (M) to MHF4, 300mm
EWM-C117FL06E*	LTE 4G,3G WCDMA/DC-HSPA+, 2G module, MPCCI-L280H
1750007990-01	Antenna 4G/LTE full band L=11 cm 50 Ohm
1750006009	Antenna Cable SMA (F) to MHF 1.32 25cm

## SW Specification

Software Application	Function Support
SUSI API	I2C, GPIO, SPI, WDT, RTC, Backlight Control
WISE-PaaS/DeviceOn	Built-in

## Dimensions

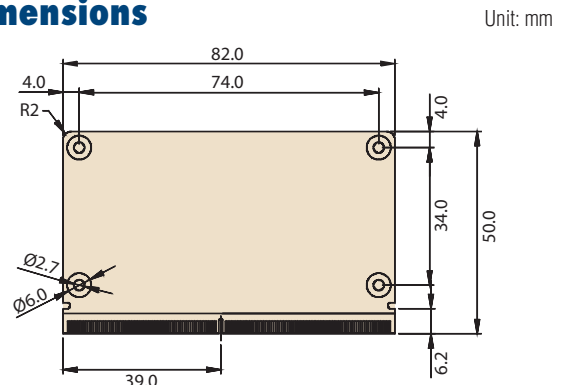

# Embedded Linux Support and Design-in Services

## Hardware Certified Ubuntu and Yocto with Eco Partner Services

Linux is the most popular embedded OS for transportation, outdoor services, factory automation, and mission critical applications. Its open source and kernel reliability features ease security updates, and make it particularly adaptable to new AI and Edge computing technology. Advantech has cooperated with Canonical and other software partners to provide hardware certified Ubuntu image and Yocto BSP as Linux offerings. The Advantech, Embedded Linux, and Android Alliance (ELAA) delivers local software services and consultation.



### Features

<b>Certified OS and BSP</b> <ul style="list-style-type: none"> <li>Platform compatibility tests</li> <li>Preloaded functional driver and software stacks</li> </ul>	<b>Licensed Services</b> <ul style="list-style-type: none"> <li>License authorized Canonical delivers 10-years of bug fixes and security updates</li> <li>In-house bundled service</li> </ul>	<b>Numerous AI and Edge Resources</b> <ul style="list-style-type: none"> <li>Containerized technology for service provision and deployment</li> <li>AI resources from Caffe, TensorFlow, and mxnet</li> </ul>	<b>Local Partner Alliance</b> <ul style="list-style-type: none"> <li>Embedded Linux and Android Alliance (ELAA)</li> </ul>
---	---	---	--

# WISE-DeviceOn

## Massive IoT Device Management Utility

IoT deployment and management typically involves numerous disparate devices installed on multiple sites. These devices require effective monitoring, managing, and tracking. Advantech's easy-to-use WISE-DeviceOn interface enables users to remotely monitor device health, troubleshoot problems, and send software/firmware updates over-the-air (OTA). In sum, DeviceOn empowers quick real-time responsiveness to emerging problems.



### Features

Comprehensive Management	Remote Access	Efficient Operations
<ul style="list-style-type: none"><li>• Devices status</li><li>• Peripherals/firmware</li><li>• Open for extension</li></ul>	<ul style="list-style-type: none"><li>• Real-time monitoring</li><li>• Remote controls</li><li>• Troubleshooting</li></ul>	<ul style="list-style-type: none"><li>• Zero-touch on-boarding</li><li>• OTA updates</li><li>• Batch control</li></ul>

### Product Highlights



**SOM-6883**

High-performance 11<sup>th</sup> Gen Intel<sup>®</sup> COMe Type 6 Module



**MIO-5375**

Compact 11<sup>th</sup> Gen Intel<sup>®</sup> Outdoor Focused 3.5" SBC



**EPC-B5587**

10<sup>th</sup> Gen Intel<sup>®</sup> Xeon<sup>®</sup> based Edge server



**EPC-R3220**

Arm based IoT Edge Gateway