




Ethernet I/O: BusWorks® Series

963EN, 964EN Ethernet Analog Input Modules

RoHS Compliant



24 HOUR STOCK ITEM
2 YEAR WARRANTY

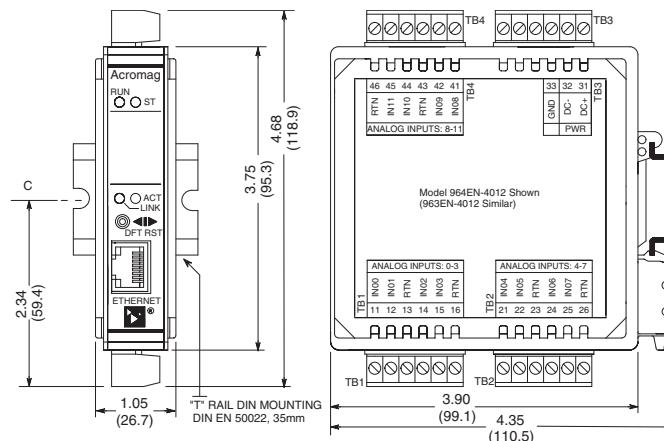

Standard model includes cage clamp terminal blocks.
Optional terminals are available.

EtherNet/IP™
conformance tested

Modbus/TCP
conformance tested

12-channel Single-ended Analog Current or Voltage Input ◆ Ethernet/IP or Modbus TCP/IP Communication

Description

Models

963EN: 12 DC current input channels

964EN: 12 DC voltage input channels

These modules provide an isolated Ethernet network interface for twelve analog input channels. Compact design saves space and lowers system costs. Multi-range inputs accept signals from a variety of sensors and devices. High-resolution, low noise, A/D converters deliver high accuracy and reliability.

Input Ranges

Ranges user-selectable on each terminal block for a group of four input channels (4-channel basis).

DC Current:

0 to 1mA, 0 to 11mA, 0 to 20mA, 4 to 20mA

0 to 20 amps AC (with optional AC sensor)

DC Voltage:

±1V, ±5V, or ±10V DC

Network Communication

EtherNet/IP or Modbus TCP/IP 10/100Mbps

Power Requirement

15 to 36V DC supply (2 Watts) required

Approvals

CE/ATEX marked.

UL, cUL listed, Class I; Div. 2; Groups A, B, C, D.

EtherNet/IP, Modbus/TCP conformance tested.

Key Features & Benefits

- Configurable from standard web browser
- EtherNet/IP or Modbus TCP/IP communication with auto 10/100Mbps data rate negotiation
- 12-input module has very low cost per channel
- Universal DC inputs support a wide variety of industrial sensors and signals
- High-resolution 16-bit Σ-Δ A/D converters ensure precise, high accuracy measurements
- Wide operational temperature range permits installation in extreme environments

Performance Specifications

◆ Input

Accuracy

Better than ±0.05% of span for nominal input ranges.

Analog to Digital Converter (A/D)

16-bit Σ-Δ converter. 0.005% (1/20000) resolution.

Noise Rejection

Normal Mode: Better than 40dB @ 60Hz.

Common Mode: Better than 140dB @ 60Hz.

Input Filter Bandwidth

-3dB at 3Hz, typical.

Input Conversion Rate

180mS per channel.

Input Impedance

DC Current Input: 49.9 ohms.

DC Voltage Input: Greater than 110.5K ohms.

◆ Environmental

Ambient Temperature and Humidity

Operating: -25 to 70°C (-13 to 158°F).

Storage: -40 to 85°C (-40 to 185°F).

Relative Humidity: 5 to 95%, non-condensing.

Isolation

1500V AC for 60 seconds or 250V AC continuous.

3-way isolation between I/O, network, and power.

Inputs share a common.

Ordering Information

◆ I/O Modules

963EN-4012
Current input, 12-channel, Ethernet Modbus TCP/IP

963EN-6012
Current input, 12-channel, EtherNet/IP

964EN-4012
Voltage input, 12-channel, Ethernet Modbus TCP/IP

964EN-6012
Voltage input, 12-channel, EtherNet/IP

◆ Accessories

Industrial Ethernet Switches

Hardware Accessories and Power Supplies

Software Support

Acromag THE LEADER IN INDUSTRIAL I/O

Tel: 248-295-0880 ■ sales@acromag.com ■ www.acromag.com ■ 30765 S Wixom Rd, Wixom, MI 48393 USA