


Ethernet I/O: BusWorks® NT Series

NT2210 Ethernet Analog I/O Modules

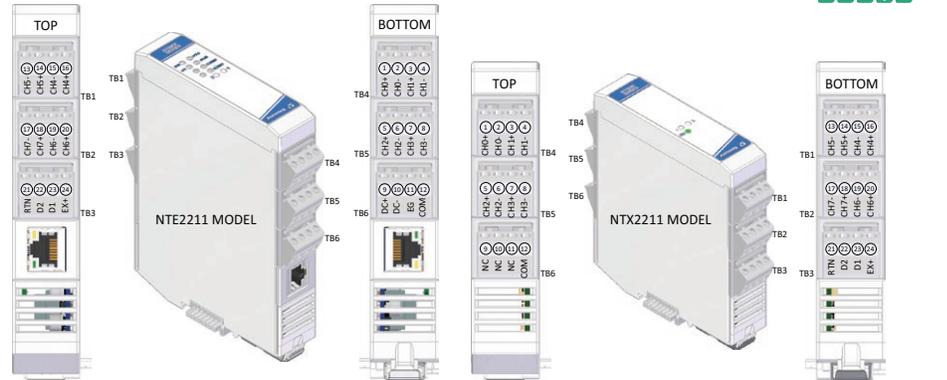

8 differential current inputs ♦ 2 discrete I/O ♦ Ethernet I/O plus Expansion I/O ♦ Multi-protocol support

The BusWorks® NT2000 series offers a cost-effective, modular solution for Ethernet remote I/O systems. Two module types are available. NTE Ethernet models provide the protocol interface plus I/O signal processing channels. NTX expansion modules add extra I/O channels when mated to any NTE Ethernet communication module.

NT2210 modules offer 8 current inputs and 2 bidirectional discrete I/O channels. Each input has true differential 16-bit A/D. NTE Ethernet models provide a compact network interface to monitor sensor levels or 4-20mA loops. Appending NTX expansion models can interface up to 32 differential current inputs on a single IP address.


Applications include collecting pressure, level, flow, temperature, and other data at sensors, transducers, or transmitters. The 4-20mA current loop is the most common process control signal in many industries.

An isolated RS-485 bus links up to three expansion modules to the Ethernet module with connectors that join along the DIN rail. This internal NT bus distributes power and communication between the modules. Users can mix analog, temperature, and discrete I/O modules across the NT bus.

Acromag's i2o® messaging technology allows direct peer-to-peer or multicast communication between remote modules without a master controller.

Key Features & Benefits

- Configured over Ethernet with web browser
 - Expandable I/O capacity, up to 58 I/O channels of mixed signal types on one IP address
 - Field-selectable Modbus TCP/IP, EtherNet/IP, or Profinet communication
 - i2o peer-to-peer or multicast communication
 - Dual RJ45 ports enable daisy chain topology
 - Eight current inputs
 - Accepts ±20mA, 0/4-20mA, and 0/10-50mA input
 - Discrete I/O can monitor and control equipment with TTL or 32V logic levels
 - *OPC-UA, *MQTT and *RESTful API IIoT support
 - Conditional logic for rule-based I/O operation
 - Advanced *alarm and *data logging functions
 - 1500V isolation between I/O, network, and power
 - Thin 25mm housing with pluggable terminals
 - Wide temperature operation (-40 to 70°C)
 - CE compliant. UL/cUL Class 1 Div 2 and ATEX/IECEx Zone 2 approvals
- * Coming soon. Consult factory for availability.

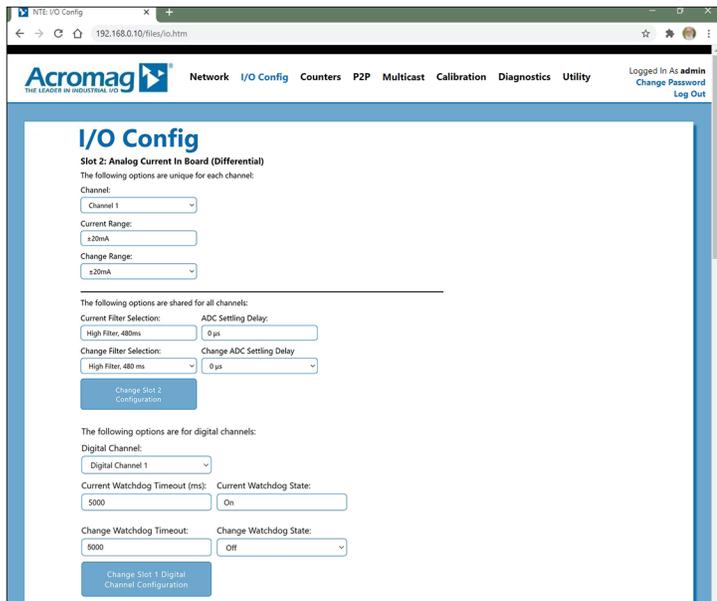

Easily configure I/O modules using any web browser.

Tel 877-214-6267 ■ sales@acromag.com ■ www.acromag.com ■ 30765 Wixom Rd, Wixom, MI 48393 USA



Ethernet I/O: BusWorks® NT Series

NT2210 Ethernet Analog I/O Modules

Performance Specifications

■ Ethernet Interface (NTE models only)

Communication

Configurable for Modbus TCP/IP, EtherNet/IP, and Profinet.

10/100Mbps data rate, auto-sensing.

IP Address

Default 192.168.0.10. Configurable static IP or DHCP.

■ Analog Inputs

A/D Converter

Eight input channels differentially multiplexed to a 24-bit sigma-delta ADC through unity-gain differential buffers (only 16-bits are used).

Input Current Ranges

±20mA, 0-20mA, 4-20mA, 10-50mA, or 0-50mA. Inputs will float relative to ADC unless connected to COM. Up to five inputs in series can connect to the same 20mA current source.

Input Accuracy

Better than ±0.05% of span typical, ±0.1% maximum.

■ Discrete Inputs (Active-Low)

Input Signal Voltage Range

0 to +32VDC.

Input Current

280µA, typical at 32VDC.

Input Signal Threshold

TTL compatible w/100mV of hysteresis, typical. 1.7V DC Low-to-High, 1.6V DC High-to-Low. 0.8V DC TTL LOW limit, 2.0V DC TTL HIGH limit.

Input Resistance

100K ohms typical (input only), ~10K ohms with output pull-up.

Input Response Time

5ms typical, not including network time.

■ Discrete Outputs (Sinking)

Output "OFF" Voltage Range

0 to 32V DC.

Output "ON" Current Range

0 to 250mA DC, continuous.

Output Rds ON Resistance

0.8 ohms typical, 1.6 ohms maximum.

Output Response Time

5ms typical. Does not include network time.

■ General I/O

Input Update/Conversion Rate

Fresh data available to the network every 10ms.

Response Time from an Ethernet command

Less than 5ms, typical.

Excitation

External voltage of 4-32V required between I/O EXC and any RTN. Excitation must source 52mA minimum (at 32V). For 2 channels at 250mA max rated load, excitation must source 0.5A min.

I/O Pull-Ups (Internal)

Each I/O channel has 10KΩ pull-up to EXC to pull the tandem open drain output and input high/OFF.

■ Environmental and Physical

Temperature and Humidity

Operating: -40 to +70°C (-40 to +158°F).

Storage: -40 to +85°C (-40 to +185°F).

Relative Humidity: 5 to 95%, non-condensing.

Isolation

1500V AC for 60 seconds and 250V AC or 354V DC continuous between I/O channels (group), each network port and power circuits.

Power Supply

10-32V DC SELV power wired to NTE models only.

Power to NTX models is via NT bus connection.

Power Consumption

NTE2211: ≤1.5W (input).

NTX2211: ≤0.5W max. (each).

Dimensions (width x height x depth)

NTE: 25 x 116.9 x 139.2 mm (0.98 x 4.6 x 5.48 inches).

NTX: 25 x 116.9 x 116.65 mm (0.98 x 4.6 x 4.59 inches).

Weight

NTE: 0.5 lbs (0.23 kg).

NTX: 0.3 lbs (0.14 kg).

■ Standards and Certifications

Electromagnetic Compatibility (EMC)

CE marked, per EMC Directive 2004/108/EC.

Safety Approvals

UL/cUL: Class I; Div 2; Groups A, B, C, D.

ATEX/IECEx: Zone 2.

Ordering Information

■ Models

[Go to on-line ordering page >](#)

NTE2211-1111

Ethernet I/O module with dual RJ45 ports, 8 differential current inputs and 2 discrete I/O

NTX2211-0011

Expansion I/O module with 8 differential current inputs and 2 discrete I/O

■ Accessories

5035-369

5035-370

Ethernet patch cable, low EMI, double-shielded. 3 feet (5035-369) or 15 feet (5035-370).

P55R-VB24

Power supply, 24V DC, 15W output.

See www.acromag.com for other sizes.



Tel 877-214-6267 ■ sales@acromag.com ■ www.acromag.com ■ 30765 Wixom Rd, Wixom, MI 48393 USA