

# ADAM-4015 ADAM-4015T ADAM-4016


6-ch RTD Module with Modbus®

6-ch Thermistor Module with Modbus

1-ch Analog Input/Output Module



ADAM-4015

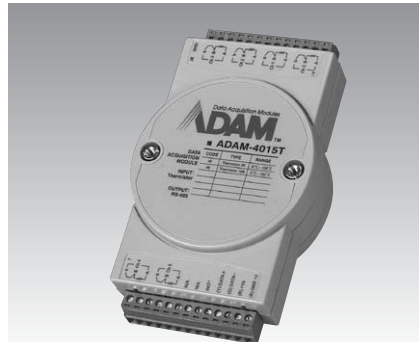

ADAM-4015T



ADAM-4016



## Specifications

### General

- Connectors 2 x Plug-in terminal block (#14 ~ 28 AWG)
- Power Consumption 1.2 W @ 24 V<sub>DC</sub>
- Watchdog Timer System (1.6 second) & Communication
- Support Protocol ASCII command and Modbus/RTU
- Wire Burnout Detector Yes

### Analog Input

- Channels 6 differential
- Input Connections 2, 3, or 4-wire
- Input Impedance 10 MΩ
- Input Type Pt, Balco and Ni RTD
- RTD Types and Temperature Ranges
  - Pt 100 RTD:
    - Pt -50° C to 150° C
    - Pt 0° C to 100° C
    - Pt 0° C to 200° C
    - Pt 0° C to 400° C
    - Pt -200° C to 200° C
  - IEC RTD 100 ohms (a = 0.00385)
  - JIS RTD 100 ohms (a = 0.00392)
  - Pt 1000 RTD
    - Pt -40° C to 160° C
  - Balco 500 RTD
    - 30° C to 120° C
  - Ni 50 RTD
    - Ni -80° C to 100° C
  - Ni 508 RTD
    - Ni 0° C to 100° C
  - BA1
    - 200° C to 600° C
- Accuracy ±0.1% or better
- CMR @ 50/60 Hz 120 dB
- Span Drift ±25 ppm/° C
- Zero Drift ±3 μV/° C

## Specifications

### General

- Connectors 2 x Plug-in terminal block (#14 ~ 28 AWG)
- Power Consumption 1.2 W @ 24 V<sub>DC</sub>
- Watchdog Time System (1.6 second) & Communication
- Support Protocol ASCII command and Modbus/RTU
- Wire Burnout Detector Yes

### Analog Input

- Channels 6 differential
- Input Connections 2, 3-wire
- Input Impedance 10 MΩ
- Input Type Thermistor
- Thermistor Types and Temperature Ranges
  - Thermistor 3 k 0 ~ 100° C
  - Thermistor 10 k 0 ~ 100° C
- Accuracy ±0.1% or better
- CMR @ 50/60 Hz 120 dB
- Span Drift ±25 ppm/° C
- Zero Drift ±3 μV/° C

## Specifications

### General

- Connectors 2 x Plug-in terminal block (#14 ~ 22 AWG)
- Power Consumption 2.2 W @ 24 V<sub>DC</sub>
- Watchdog Timer 2.2 W @ 24 V<sub>DC</sub> System (1.6 second)
- Support Protocol ASCII command

### Analog Input

- Channels 1 differential
- Input Impedance Voltage: 2 MΩ  
Current: 125 Ω  
(Added by users)
- Input Type mV and mA
- Input Range ±15 mV, ±50 mV, ±100 mV, ±500 mV, ±20 mA
- Accuracy Voltage mode: ±0.1% or better  
Current mode: ±0.2% or better
- CMR @ 50/60 Hz 150 dB
- Span Drift ±25 ppm/° C
- Zero Drift ±6 μV/° C

### Analog Output

- Channels 1
- Accuracy 0.05% of FSR
- Output Type V
- Output Range 0 ~ 10 V
- Drift ±50 ppm/° C
- Drive Current 30 mA
- Isolation Voltage 3000 V<sub>DC</sub>

### Digital Output

- Channels 4, open collector to 30 V, 30 mA max. load
- Power Dissipation 300 mW

## Common Specifications

### General

- Power Input Unregulated 10 ~ 30 V<sub>DC</sub>

### Analog Input

- Resolution 16 bits
- NMR @ 50/60 Hz 100 dB
- Sampling Rate 10 sample/second (total)
- Isolation Voltage 3000 V<sub>DC</sub>

### Environment

- Humidity 5 ~ 95% RH
- Operating Temperature -10 ~ 70° C (14 ~ 158° F)
- Storage Temperature -25 ~ 85° C (-13 ~ 185° F)

## Ordering Information

- ADAM-4015 6-ch RTD Input Module with Modbus
- ADAM-4015T 6-ch Thermistor Input Module with Modbus
- ADAM-4016 1-ch Analog Input/Output Module

- 1 PAC & Software
- 2 BAS
- 3 UNO
- 4 RS-485 I/O
- 5 Ethernet I/O
- 6 TPC
- 7 IPPC
- 8 FPM
- 9 AWS
- 10 Plug-in I/O
- 11 CompactPCI
- 12 Signal Conditioning
- 13 USB I/O
- 14 Motion Control I/O
- 15 Ethernet Switch
- 16 EDG
- 17 ICOM