


MSC-202B1L

2-Port RS-422/485 Low Profile PCI Express Card w/Octopus Cable

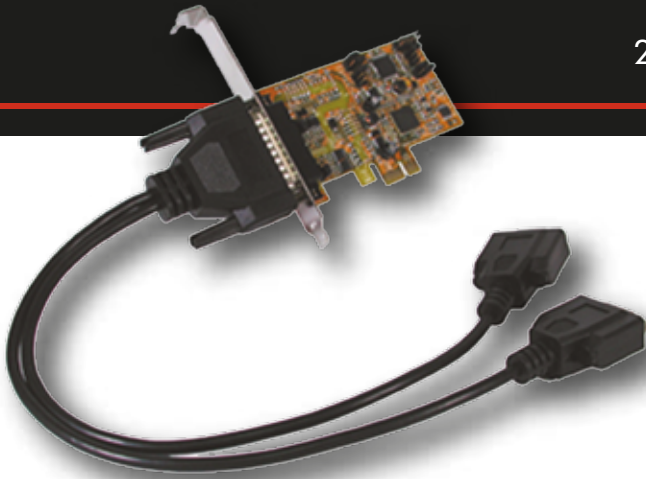

Features

- ▶ Full x1 PCI Express Throughput, 250Mbytes/sec
- ▶ Fully Compliant with PCI Express Base Specifications, Revision 1.1
- ▶ Supports RS485 Auto Transceiver Turn Around by Unique Featured ATTA™ Hardware
- ▶ 128-byte deep FIFO per transmitter and receivers
- ▶ Supports 2 DB9-male Connectors over an Octopus Cable
- ▶ Supports Low Profile Form Factor with Low Profile Bracket
- ▶ Support 4-wire RS422/485 and 2-wire RS485 Modes
- ▶ Supports RS422/485 Speed up to 921.6Kpbs

Specifications

System

Fully Compliant with x1 PCI Express Base Specifications 1.1

Serial Port(s)

2 x RS-422/485 Serial Ports

Connectors

2 x DB9 Male Connectors over DB25 Octopus Cable

Interface

3 modes are selectable:

- 4-wire RS-422 (TXD+/-, RxD+/-)
- 2-wire RS-485 (TxD+/-, RxD+/-)
- 2-wire RS-485 (Data+/-, Data+/-)

Parity

None, Even, Odd

Data bits

5,6,7,8,9 bits Data Frames

Baud Rate

Up to 921.6Kbps

Terminator

120 OHM, can be Enabled/Disabled by Jumpers

ATTA™

Auto RS-485 Transmitter buffer direction control by the ATTA™ Hardware

OS Support

Windows 2000, XP, 2003, 2008, Vista, Win 7, and Linux

Operating Temperature

0 to 55°C (32 to 131°F)

Operating Humidity

10% to 90% relative humidity (non-condensing)

Storage Temperature

-40 to 75°C (-40 to 167°F)

Storage Humidity

5% to 95% relative humidity (non-condensing)

Dimensions

3.93" x 2.51" (10.00cm x 6.40cm)

Warranty

5-Year Warranty

Ordering Information

MSC-202B1L

2-Port RS-422/485 PCI Express Card with Octopus Cable

MSC-202B1L-SI

2-Port RS-422/485 PCI Express Card with Octopus Cable, Isolated and 15KV ESD Surge Protection