


MSC-102B1/MSC-102B1-SI

2-Port RS-422/485 Universal PCI Card

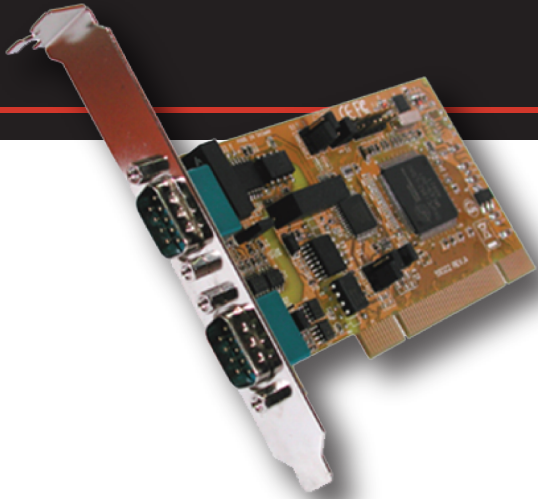

Features

- ▶ Two 16C950 UART Serial Ports over PCI Slot
- ▶ 2,500Vrms Isolated and 15KV ESD Surge Protection (MSC-102B1-SI Model)
- ▶ PCI Specification 3.0 Compliant, 133MB/S Bandwidth
- ▶ Supports RS-485 Auto Transceiver Turn Around by Unique Featured ATTA™ Hardware
- ▶ PCI IRQ Sharing Feature Eliminates IRQ Conflicts
- ▶ 4-wire RS-422/485 and 2-wire RS-485 applications
- ▶ RS-422/485 speed up to 921.6Kpbs

Specifications

System

For 32-bit 33/66MHZ PCI Bus Systems

PCI Interface

Fully PCI Bus Specification 2.2 compliant

Serial Port(s)

2 x DB9-male RS-422/485 Connectors

Interface

3 modes are selectable:

- 4-wire RS-422 (TXD+/-, RxD+/-)
- 4-wire RS-485 (TxD+/-, RxD+/-)
- 2-wire RS-485 (Data+/-, Data+/-)

Parity

None, Even, Odd

Data bits

5,6,7,8,9 bits Data Frames

Baud Rate

Up to 921.6Kbps

Terminator

120 OHM, can be Enabled/Disabled by Jumpers

Isolation Protection (MSC-102B1-SI Model)

2,500Vrms Isolation

Surge Protection (MSC-102B1-SI Model)

15KV ESD Surge Protection

ATTA™

Auto RS-485 Transmitter buffer direction control by the ATTA™ Hardware

OS Support

Windows 9x, Me, XP, NT, 2000, 2003, Vista, 7, and Linux

Operating Temperature

0 to 55°C (32 to 131°F)

Operating Humidity

10% to 90% relative humidity (non-condensing)

Storage Temperature

-40 to 75°C (-40 to 167°F)

Storage Humidity

5% to 95% relative humidity (non-condensing)

Dimensions

4.72" x 2.53" (12.00cm x 6.45cm)

Warranty

5-Year Warranty

Ordering Information

MSC-102B1 2-Port RS-422/485 Universal PCI Card
MSC-102B1-SI 2-Port RS-422/485 Universal PCI Card with Surge and Isolation