

# ARK-1120L

## Palm-size and Price Competitive Intel® Atom™ N455 Fanless Embedded Box PC



### Features


- Intel® Atom™ processor N455 1.66 GHz + ICH8M
- Low power consumption, < 10W
- Palm-size design: 133.8 x 43.1 x 94.2 mm, IP40
- DDR3 memory support , up to 2GB
- Supports 2.5" SATA HDD
- One half mini-PCIe slot. Ex : WiFi add-on card
- 2 x RS-232 & 4 x USB ports
- Supports SUSIAccess and Embedded Software APIs
- Optional VESA/DIN-rail/Wall mount




### Specifications

ARK-1120L-N5A1E		
Processor System	CPU	Intel Atom processor N455 1.66 GHz
	Max. Speed	1.66 GHz
	System Chipset	Intel ICH8-M
	BIOS	AMI 16 Mbit Flash BIOS
Memory	Technology	DDR3 up to 667 MHz
	Max. Capacity	2 GB
	Socket	1 x 204 pin SO-DIMM
Graphics	Chipset	Intel ICH8-M
	Interface	CRT interface, up to 1600 x 1200 (SXGA)
Ethernet	LAN	1 x 10/100/1000 Mbps Intel 82567V Ethernet controller, Support Wake on LAN
	Interface	Line-out, Line-in
I/O Interface	Serial Ports	2 x RS-232
	USB Interface	4 x USB ports, USB 2.0 Compliant
Other	Watchdog timer	255-level timer interval, setup by software
Expansion	Mini PCIe	1 x half-size Mini PCIe
	HDD	Support one drive bay space for SATA 2.5" HDD (support 9.5mm height only)
Storage	SSD	Supports CompactFlash socket for type I/II CompactFlash disk (only available for T-Parts and CTOS service)
	Microsoft Windows	Windows 7, XP Professional, XP Embedded, WinCE 6.0
Software Support	Linux	Ubuntu
	Power Type	ATX
Power Requirement	Power Input Voltage	12 V <sub>DC</sub>
	Minimum Power Input	12 V, 1.5 A
	Power Adaptor	AC to DC, DC12 V/3 A, 36 W
Power Consumption	Typical	9.12 W
	Max	10.80 W
Mechanical	Construction	Aluminum housing
	Mounting	Desk/Wall-mounting; VESA mounting
	Dimensions (W x H x D)	133.8 x 43.1 x 94.2 mm (5.27" x 1.70" x 3.71")
	Weight	0.7 kg (1.55 lb)
Environmental and Certifications	Operating Temperature	0 ~ 40° C (32 ~ 104° F) with 0.7m/s air flow and extend temperature HDD
	Storage Temperature	-40 ~ 85° C (-40 ~ 185° F)
	Relative Humidity	95% @ 40° C (non-condensing)
	Vibration During Operation	With CompactFlash disk: 3Grms, IEC 60068-2-64, random, 5 ~ 500 Hz, 1hr/axis.
	Shock During Operation	With CompactFlash disk: 30Grms, IEC 60068-2-27 , half sine, 11 ms duration
	EMC	CE/FCC Class A, CCC, BSMI
Safety Certifications	UL, CCC, BSMI	

### Dimensions

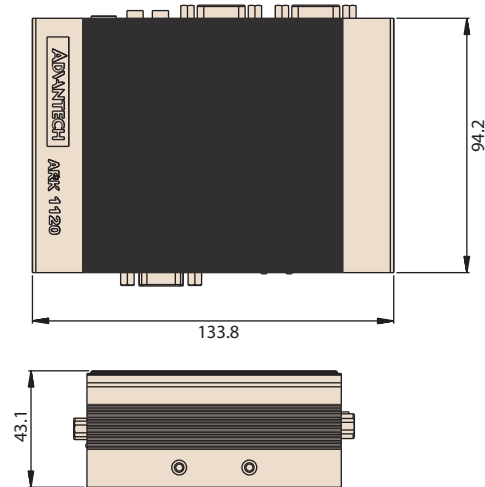


### DIN Rail




Unit: mm (inch)


### VESA mount



### Front Panel External I/O Mechanical Layout/Drawing

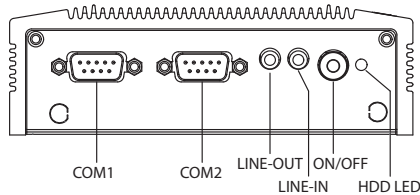

### Rear Panel External I/O Mechanical Layout/Drawing

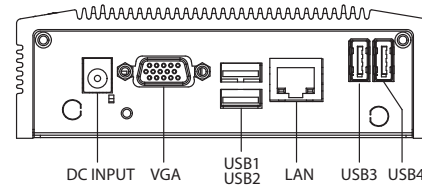

## ARK-1120 Product Ordering Information



#### ARK-1120L-N5A1E

- Intel Atom N455 1.66GHz w/ 2COM+4USB+LAN+Audio



#### ARK-1120F-N5A1E

- Intel Atom N455 1.66GHz w/ VGA+4COM+2USB+LAN

NEW



#### ARK-1120LX-N5A1E

- 320G HDD +2G Memory+Windows XP Embedded + SUSIAccess Pro
- Intel Atom N455 1.66GHz w/ 2COM+4USB+LAN+Audio

## Packing List

Part Number	Description
-	1 x ARK-1120L unit
-	1 x Driver/Utility CD/manual
-	1 x Traditional chinese user manual for CCC
-	1 x China RoHS
1960047289T001	DC power adapter locker
1757003553	AC-to-DC Adapter DC12 V/3 A 36 W, with DC-Jack, 0 ~ 40° C for Home and Office Use

## Optional Items

Part Number	Description
1700001524	Power Cable 3-pin 180 cm, USA type
170203183C	Power Cable 3-pin 180 cm, Europe Type
170203180A	Power Cable 3-pin 180 cm, UK Type
1700008921	Power Cable 3-pin PSE Mark 183cm
1960052227N001	ARK-1120 VESA/Desk mount bracket
9666112000E	DIN Rail mounting kits for ARK-112X series

## Embedded OS (Only available for T-Parts OEM, and CTOS service)

Part Number	Description
2070010313	XPE WES2009 V4.0 ENG
2070010314	XPE WES2009 V4.0 24MUL
2070010919	WES7E SP1 V5.1 ENG