


# ASMB-815

**LGA 3647-PO Intel® Xeon® Scalable ATX Server Board with 6 DDR4, 5 PCIe x8 or 2 PCIe x16 and 1 PCIe x8, 8 SATA3, 6 USB3.0, Dual 10GbE, IPMI**

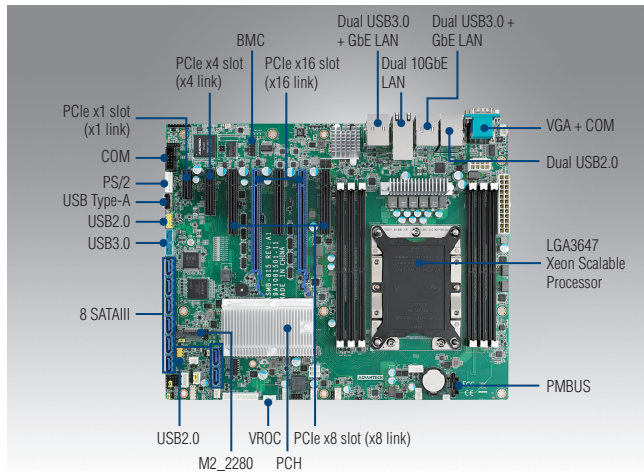

## Features


- ATX server board with Xeon® Scalable processors
- DDR4 2933MHz RDIMM up to 768GB, support Apache Pass
- Five PCIe x8 or two PCIe x16 and 1 PCIe x8
- Intel® X557-AT2 dual 10GbE ports
- Eight SATA3 and one M.2 connectors (SATA / PCIe compatible)
- 0 ~ 60 °C ambient operating temperature range



## Specifications

Form Factor	ATX form factor	
Processor System	Socket	Intel LGA 3647
	CPU type	Intel Xeon 1st and 2nd Gen Scalable processors (CPU cooler should be purchased separately and TDP up to 205W)
Core Logic	Chipset	Intel C621/C622 chipset
	Total slots	6 (1 DIMM per channel)
Memory	Capacity	Maximum 768GB ECC LRDIMM
		Maximum 768GB ECC 3DS RDIMM
	Memory type	DDR4 2133/2400/2666/2933MHz RDIMM, LRDIMM
	Memory size	4GB, 8GB, 16GB, 32GB, 64GB, 128GB
Expansion Slots	Total PCI/PCI-X/PCIe slots	7
	Slot location 1	PCIe x1 slot (x1 link), signal from PCH
	Slot location 2	PCIe x4 slot (x4 link), signal from PCH
	Slot location 3	PCIe x8 slot (0 or x8 link), signal from CPU
	Slot location 4	PCIe x16 slot (x8 or x16 link), signal from CPU
	Slot location 5	PCIe x8 slot (0 or x8 link), signal from CPU
	Slot location 6	PCIe x16 slot (x8 or x16 link), signal from CPU
Graphics	VGA	Aspeed AST 2500/2510
	SATA controller	Intel C621/C622: 8 x SATA3 (600 MB/s) support software RAID 0,1,5,10
Storage	SAS controller	-
	Networking	2 x Intel I210AT / Intel X557-AT2 (dual 10GbE ports)
Onboard I/O Connector	PSU connector	24-pin SSI power connector + 1 x 8-pin SSI 12 V power connector + 4-pin SSI 12 V power connector
	USB connector	4 x USB2.0 ports (two onboard headers) + 2 x USB3.0 ports (one onboard header) + 1 x Type-A USB2.0 port
	Fan header	6 x 4-pin (5 for system + 1 for CPU)
	M.2	1 x M.2 2280 B+M key (SATA and PCIe)
	SMBus	1
	Chassis intruder	1
	Front LAN LED	1
	Audio Header	1
Rear I/O Connector	PS/2 Keyboard/Mouse header	1
	Serial port header	1
	External serial port	1
	External USB port	4 (USB3.0) + 2 USB (2.0)
	VGA port	1
	RJ-45	5 (1 port dedicated and 1 port shared with BMC)
	PS/2 Keyboard/Mouse	-
Management Solution	Infiniband	-
	Software	-
Monitoring	Out of band remote management	Yes (ASMB-815I & ASMB-815T2 SKUs)
	CPU temperature	Yes
Watchdog Timer	System Monitoring	Yes
	Output	System reset
Power Requirement	Interval	Programmable 1 ~ 255 sec/min
	Power On (205W CPU@2.5GHz DDR4 2400 4G*6)	3.3V 5V 12V 5Vsb -12V 12V_8P 2.77127A 7.00549A 0.57829A 0.132880A 0.063951A 17.5801A
Environment	Operating	Non-operating
	Temperature	0 ~ 60 °C, depends on CPU speed and cooler solution
Physical Characteristics	Humidity	-40 ~ 85 °C
	Dimension (L x H)	10% ~ 95% (Non condensing)
		304.8 x 244 mm (12" x 9.6")

### Block Diagram

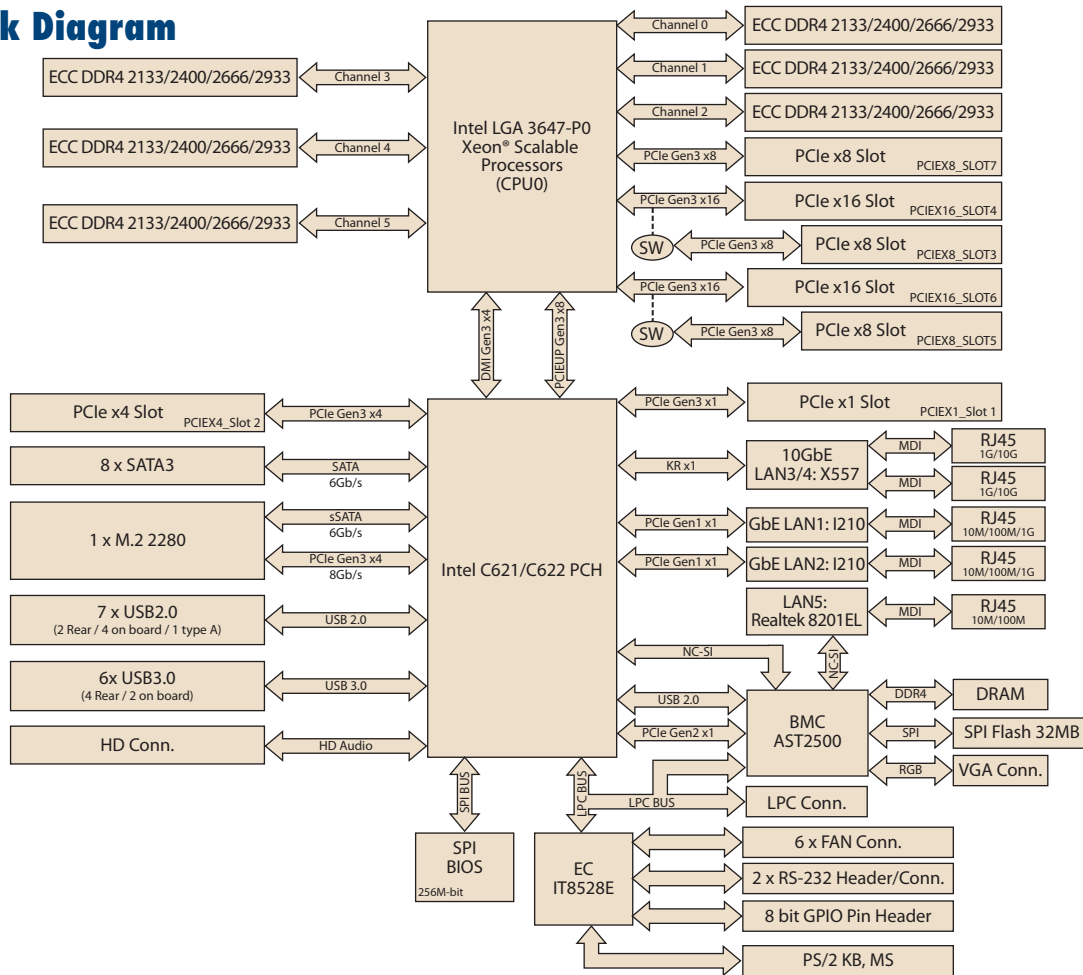

### Ordering Information

Part Number	Chipset	Memory	GbE/10GbE LAN	IPMI	Graphics
ASMB-815-00A1E	C621	6 x DDR4 RDIMM/LRDIMM	2/-	-	AST 2510
ASMB-815I-00A1E	C621	6 x DDR4 RDIMM/LRDIMM	2/-	Yes	AST 2500
ASMB-815T2-00A1E	C622	6 x DDR4 RDIMM/LRDIMM	2/2	Yes	AST 2500

### Packing List

Part Number	Description	Quantity
2066815I00	Driver CD	x 1
2006815I10	Startup manual	x 1
1700003194	SATA data cables	x 2
1700022749-11	SATA power cables	x 2
1700019748	CPU power cable	x 2
1930008089	Screw for M.2 device	x 2
1960076488T000	I/O shield	x 1
1651003167-01	LGA3647 CPU clip	x 1

### Optional Accessories

Part Number	Description
PCA-AUDIO-HDB1E	HD audio card
PCA-TPM-00B1E	TPM 2.0 module
1960081155N001	LGA-3647 narrow CPU heatsink for 1U chassis (85W)
196008272T001	LGA-3647 narrow CPU cooler for 2U/4U chassis (150W)
1960081603N101	LGA-3647 narrow CPU cooler for 4U chassis (205W)
1700002204	Dual port USB cable (27 cm) with bracket
1700008461	Four port USB cable (30.5 cm) with bracket
1700020277-01	Dual port USB 3.0 cable (30 cm) with bracket
1701090401	COM port cable (40 cm) with bracket
1700019268-11	PS/2 port cable (35 cm)
1960063434N000	Cable bracket for 1700019268-11
1960082347T000	For 1U chassis IO shield

Note: PCA-AUDIO-HDB1E is not compatible with Advantech 3U chassis.

### I/O View



ASMB-815T2-00A1E

ASMB-815I-00A1E

ASMB-815-00A1E