

# M133KML(HB)

## 13.3" Intel® Core™ i5-7200U Defence Ultra Rugged Tablet



### KEY FEATURES

- Intel® 7th Gen. Core™ i5-7200U, 2.5 GHz (turbo up to 3.1 GHz)
- 13.3" 1920 x 1080 Resolution Transflective TFT-LCD Panel
- With daylight-readable screen 500 nits and optical bonding for clarity increasing and readability enhancing
- Optional high brightness 800 nits, 13.3inch Defence Ultra Rugged Tablet
- Adjustable Kickstand that is Convertible to a handle (Optional)
- With IP65 dust and water-resistant certification
- Magnesium Alloy Housing with All-Around Elastomeric Rubber
- MIL-STD-38999 connector for LAN/ USB2.0 and Power/ RS232 Input
- Fully Sealed and Fanless Thermal Design
- MIL-STD-810G Compliant



### SPECIFICATIONS

Display			
Resolution	1920x1080	Size	13.3 inches
Contrast Ratio	1000:1	Panel Brightness	500 nits
View Angles	89,89,89,89	Type	Projected Capacitive Multi Touch
Bonding	Optical Bonding for Sunlight Viewability		
System Specification			
Processor	Intel Core i5-7200U 2.5GHz (up to 3.1GHz)	Memory	4GB SODIMM DDR4-2400 8GB SODIMM DDR4-2400 (Optional) 16GB SODIMM DDR4-2400 (Optional)
Storage	Storage 1: 1 x 128GB M.2 SSD Additional storage available with SDXC card slot Storage 1 up to 1x 1TB M.2 SSD (Optional) Storage 2 up to 1x 1TB M.2 SSD (Optional)	Ethernet controller	1 x RJ45-10/100/1000 Mbps LAN
Security	Trusted Platform Module (TPM) 2.0 Kensington Lock	Operating System	Windows 10 IoT Enterprise (64 bit)
WLAN	Support	BT	Support
WWAN	4G LTE (Optional)	GNSS	GPS, GLONASS
RFID	HF RFID 13.56 MHz reader (Optional)	Sensors	Light sensor/ g-sensor / Gyro
Smart Card Reader	Built-in Smart Card Reader, Comply with ISO7816-1.2.3 T=1 and T=Ø protocol (Optional)		
Camera			
Front Camera	2MP Front Camera	Rear Camera	8MP Rear Camera with auto-focus and LED light
Mechanical			
Dimension	338.2 x 239.8 x 47.2 mm	Weight	2.4 Kg (Without Kickstand), 2.8 Kg (With Kickstand)
Enclosure	Rear Magnesium Alloy Die-Casting Design	Cooling System	Fanless Design
Docking Housing	nan		
IO Ports			

<b>USB Port</b>	2 x USB 3.0, 1 x USB 2.0(MIL-STD-38999 connector),1 x USB 3.1(Type C)	<b>Serial Port</b>	1 x RS-232 Serial COM Port(MIL-STD-38999 connector)
<b>SD Card Slot</b>	1 x Micro SD Card Slot	<b>Video</b>	1 x HDMI (Optional)
<b>Audio</b>	Microphone: 1 x built-in Digital Mic with Noise Cancellation Speaker: 2 x 1 watt speaker	<b>LAN</b>	1 x RJ45-10/100/1000 Mbps LAN(MIL-STD-38999 connector)
<b>Indicator</b>	4x LED Indicator for Power, Battery, SSD, RF status		

<b>Environment</b>			
<b>Operating Humidity</b>	30% to 80% RH, non-condensing	<b>Operating Temperature</b>	-10°C to 50°C (14°F to 122°F)
<b>Storage Temperature</b>	-20°C to 60°C (-4°F to 140°F)	<b>Shock</b>	MIL-STD-810G Method 516.6 Procedure I
<b>Vibration</b>	MIL-STD-810G Method 514.6 Procedure I	<b>IP rating</b>	IP65, Dustproof and Waterproof
<b>Drop</b>	MIL-STD-810G Method 516.6, 4 ft	<b>ESD</b>	ESD (Contact/Air) : 12kV/12kV

<b>Certification</b>	CE, FCC, IC, UL
----------------------	-----------------

<b>Security Function</b>			
--------------------------	--	--	--

<b>SOTI MobiControl</b>	SOTI MobiControl Compliance	<b>Kensington Lock</b>	Kensington Lock Support
-------------------------	-----------------------------	------------------------	-------------------------

<b>Control</b>			
----------------	--	--	--

<b>Button</b>	1 x Power,1 x menu,2 x volume key 3 x Programmable Function Keys
---------------	---


<b>Power</b>			
--------------	--	--	--

<b>Battery</b>	7.4V, typ. 10280 mAh Li-Polymer Battery (2S2P) Hot-Swap (Optional)	<b>Battery Operating Time</b>	11 Hours
<b>Power Rating</b>	24V DC(MIL-DTL-38999/1 connector)	<b>Adapter</b>	100-240V, 50-60Hz / 24V DC

<b>Accessory</b>			
------------------	--	--	--

<b>Accessory</b>	Adapter and PowerCord Standard Battery Stylus Stand with Integrated Handle Power/RS232 External Cable LAN/USB2.0 External Cable	<b>Optional Accessory</b>	Shoulder Strap (Optional) Battery Charger (Optional) Active Pen (Optional)
------------------	--	---------------------------	--

## DIMENSIONS UNIT:MM

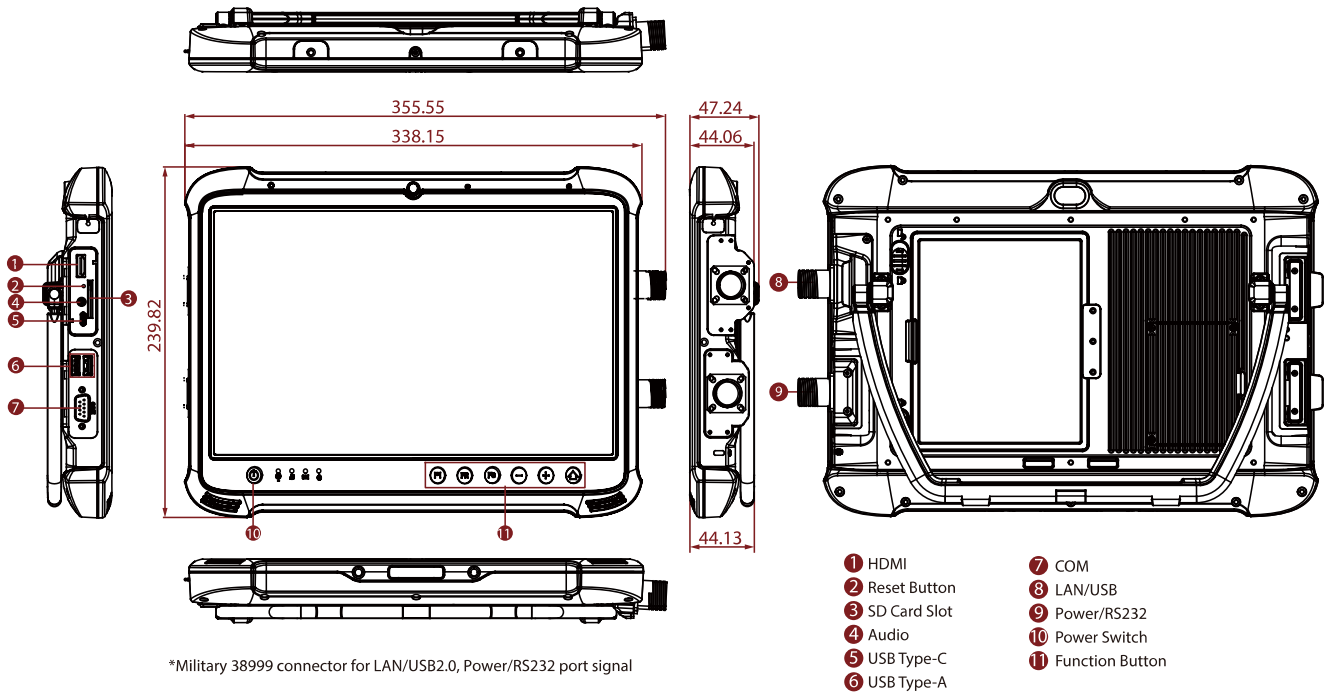

## NOTE

1. Total usable memory will be less dependent upon actual system configuration.
2. The USB Type-C connector follows USB3.0, standard, which does not support Alternate Mode (ALT) or USB Power Delivery (USB-PD).
3. TPM 2.0 available upon request.
4. Computrace theft protection and SOTI are available upon request.
5. Length measurements do not include protrusions. Weight varies with options.
6. Accessories and integrated options may vary depending on your configuration.
7. This is a simplified drawing and some components are not marked in detail.
8. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.
9. Default uses the silver defence connector with RoHs, optional green defence connector without RoHs.